



## ► PSEN cs2.2n

# PILZ

THE SPIRIT OF SAFETY

Operating Manual-1003367-EN-06

- PSEN sensor technology



This document is the original document.

Where unavoidable, for reasons of readability, the masculine form has been selected when formulating this document. We do assure you that all persons are regarded without discrimination and on an equal basis.

All rights to this documentation are reserved by Pilz GmbH & Co. KG. Copies may be made for the user's internal purposes. Suggestions and comments for improving this documentation will be gratefully received.

CECE®, CHRE®, CMSE®, INDUSTRIAL PI®, Leansafe®, MYZEL®, PAS4000®, PAS-cal®, PASconfig®, Pilz®, PIT®, PMCprimo®, PMCprotego®, PM Ctendo®, PMD®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, THE SPIRIT OF SAFETY® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries.



SD means Secure Digital

|                                                |           |
|------------------------------------------------|-----------|
| <b>Introduction</b>                            | <b>5</b>  |
| Validity of documentation                      | 5         |
| Using the documentation                        | 5         |
| Definition of symbols                          | 5         |
| <b>Safety</b>                                  | <b>6</b>  |
| Intended use                                   | 6         |
| Safety regulations                             | 7         |
| Safety assessment                              | 7         |
| Use of qualified personnel                     | 7         |
| Warranty and liability                         | 7         |
| Disposal                                       | 7         |
| For your safety                                | 8         |
| <b>Unit features</b>                           | <b>8</b>  |
| <b>Function description</b>                    | <b>9</b>  |
| Block diagram                                  | 9         |
| Operating distances                            | 9         |
| Lateral and vertical offset                    | 10        |
| <b>Wiring</b>                                  | <b>11</b> |
| Pin assignment, connector and cable            | 11        |
| <b>Connection to evaluation devices</b>        | <b>11</b> |
| <b>Teaching in the actuator</b>                | <b>13</b> |
| <b>Installation</b>                            | <b>14</b> |
| <b>Adjustment</b>                              | <b>15</b> |
| <b>Operation</b>                               | <b>16</b> |
| <b>Dimensions in mm</b>                        | <b>16</b> |
| <b>Technical details safety switch</b>         | <b>17</b> |
| <b>Technical details actuator</b>              | <b>19</b> |
| <b>Classification according to ZVEI, CB24I</b> | <b>20</b> |
| <b>Safety characteristic data</b>              | <b>21</b> |
| <b>Supplementary data</b>                      | <b>21</b> |
| Radio approval                                 | 21        |

|                                                 |               |
|-------------------------------------------------|---------------|
| <b>Order reference .....</b>                    | <b>22</b>     |
| Safety switch .....                             | 22            |
| Actuator .....                                  | 22            |
| Complete systems .....                          | 22            |
| Accessories .....                               | 22            |
| <br><b>EC declaration of conformity .....</b>   | <br><b>23</b> |
| <br><b>UKCA-Declaration of Conformity .....</b> | <br><b>23</b> |

## Introduction

### Validity of documentation

This documentation is valid for the product PSEN cs2.2n. It is valid until new documentation is published.

This operating manual explains the function and operation, describes the installation and provides guidelines on how to connect the product.

### Using the documentation

This document is intended for instruction. Only install and commission the product if you have read and understood this document. The document should be retained for future reference.

### Definition of symbols

Information that is particularly important is identified as follows:



#### **DANGER!**

This warning must be heeded! It warns of a hazardous situation that poses an immediate threat of serious injury and death and indicates preventive measures that can be taken.



#### **WARNING!**

This warning must be heeded! It warns of a hazardous situation that could lead to serious injury and death and indicates preventive measures that can be taken.



#### **CAUTION!**

This refers to a hazard that can lead to a less serious or minor injury plus material damage, and also provides information on preventive measures that can be taken.



#### **NOTICE**

This describes a situation in which the product or devices could be damaged and also provides information on preventive measures that can be taken. It also highlights areas within the text that are of particular importance.

**INFORMATION**

This gives advice on applications and provides information on special features.

## Safety

### Intended use

The safety functions of the safety switch are:

- ▶ Safe shutdown of safety outputs when the actuator is removed beyond the assured release distance  $s_{ar}$  or when the actuator is not detected
- ▶ Remain shut down safely after the actuator has been removed

The safety switch meets the requirements in accordance with:

- ▶ EN IEC 60947-5-3: PDDb with the actuator PSEN cs2.1
- ▶ EN IEC 62061: SIL CL 3
- ▶ EN ISO 13849-1: PL e (Cat. 4)
- ▶ EN ISO 14119: Coding level High, design 4

The safety switch may only be used with the corresponding actuator PSEN cs2.1.

The safety level PL e (Cat. 4)/SIL CL 3 is achieved only when:

- ▶ the safety outputs use 2-channel processing.

### Improper use

The following is deemed improper use in particular:

- ▶ Any component, technical or electrical modification to the product,
- ▶ Use of the product outside the areas described in this operating manual,
- ▶ Use of the product outside the technical details (see chapter entitled [Technical Details](#)  17).

**NOTICE****EMC-compliant electrical installation**

The product is designed for use in an industrial environment. The product may cause interference if installed in other environments. If installed in other environments, measures should be taken to comply with the applicable standards and directives for the respective installation site with regard to interference.

## **Safety regulations**

### **Safety assessment**

Before using a unit, a risk assessment is required in accordance with the Machinery Regulation.

Connecting additional units may result in further risks. Take the necessary measures to protect against corruption.

The product as an individual component fulfils the functional safety requirements in accordance with EN ISO 13849 and EN IEC 62061. However, this does not guarantee the functional safety of the overall plant/machine. To achieve the relevant safety level of the overall plant/machine's required safety functions, each safety function needs to be considered separately.

### **Use of qualified personnel**

The products may only be assembled, installed, programmed, commissioned, operated, decommissioned and maintained by persons who are competent to do so.

A competent person is a qualified and knowledgeable person who, because of their training, experience and current professional activity, has the specialist knowledge required. In order to inspect, assess and handle products, devices, systems, plant and machinery, this person must be familiar with the state of the art and the applicable national, European and international laws, directives and standards.

It is the company's responsibility only to employ personnel who

- ▶ Are familiar with the basic regulations concerning health and safety / accident prevention,
- ▶ Have read and understood the information provided in the section entitled Safety
- ▶ Have a good knowledge of the generic and specialist standards applicable to the specific application.

### **Warranty and liability**

All claims to warranty and liability will be rendered invalid if

- ▶ The product was used contrary to the purpose for which it is intended,
- ▶ Damage can be attributed to not having followed the guidelines in the manual,
- ▶ Operating personnel are not suitably qualified,
- ▶ Any type of modification has been made (e.g. exchanging components on the PCB boards, soldering work etc.).

### **Disposal**

- ▶ In safety-related applications, please comply with the mission time  $T_M$  stated in the safety-related characteristic data.
- ▶ When decommissioning, please comply with local regulations regarding the disposal of electronic devices (e.g. Electrical and Electronic Equipment Act).

**For your safety****WARNING!****Loss of safety function due to manipulation of the interlocking device**

Manipulation of the interlocking device may lead to serious injury and death.

- You should prevent any possibility of the interlocking device being manipulated through the use of a spare actuator.
- Keep the substitute actuator in a safe place and protect it from unauthorised access.
- If substitute actuators are used, these must be installed as described under [Installation](#)  14].
- If the original actuators are replaced with substitute actuators, the original actuators must be destroyed before disposal.

- ▶ Do not remove the connector's protective cap until you are just about to connect the product. This will prevent potential contamination.

**Unit features**

- ▶ Transponder technology for presence detection
- ▶ Pilz coding type: uniquely coded
- ▶ Dual-channel operation
- ▶ 2 safety outputs
- ▶ LED display for:
  - State of the actuator
  - Supply voltage/fault
- ▶ 4 directions of actuation

## Function description


The safety outputs may have a high or low signal, depending on the position of the actuator.

In a safe condition the safety outputs are in the OFF state.


State of the outputs:

| Actuator in the response range | Safety output 12 | Safety output 22 |
|--------------------------------|------------------|------------------|
| Yes                            | High             | High             |
| No                             | Low              | Low              |

## Block diagram

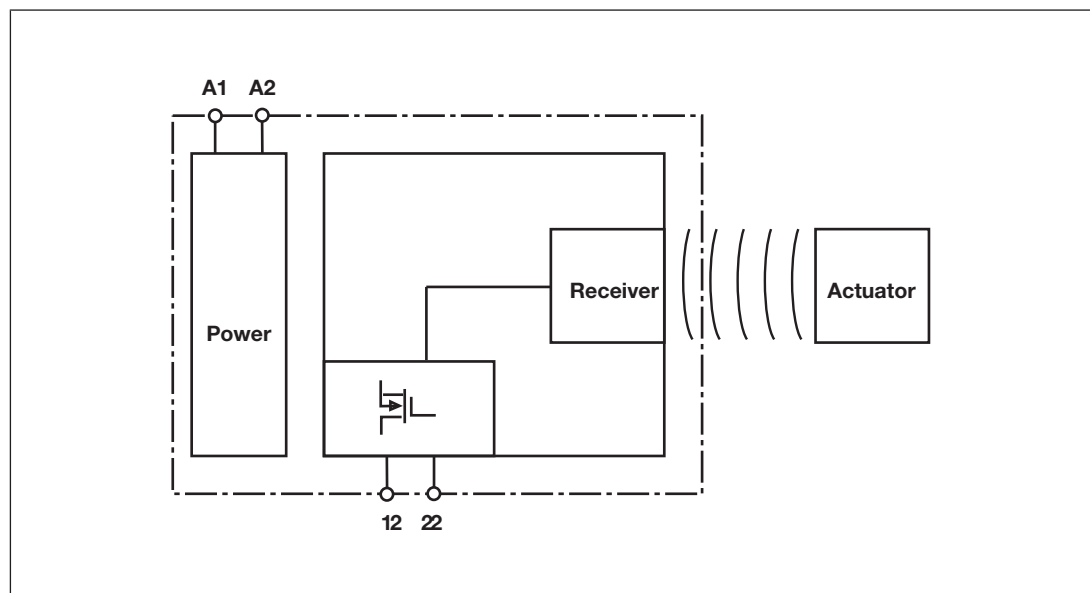


## Operating distances

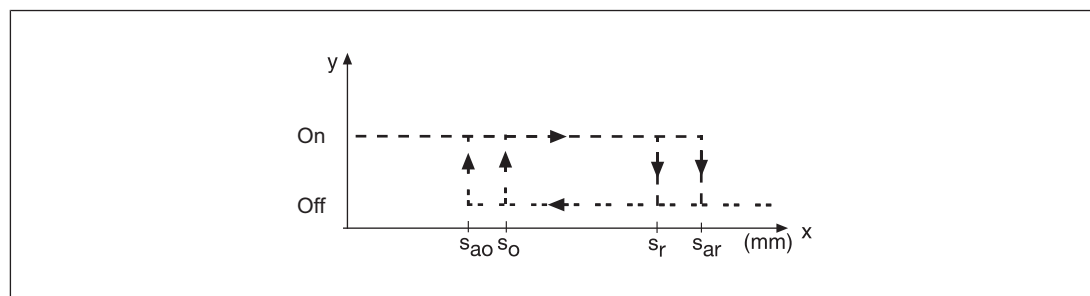

### Legend:

- ▶  $s_{ao}$  Assured operating distance: 15 mm
- ▶  $s_o$  Typical operating distance: 21 mm
- ▶  $s_r$  Typical release distance: 32 mm
- ▶  $s_{ar}$  Assured release distance: 40 mm

# Lateral and vertical offset

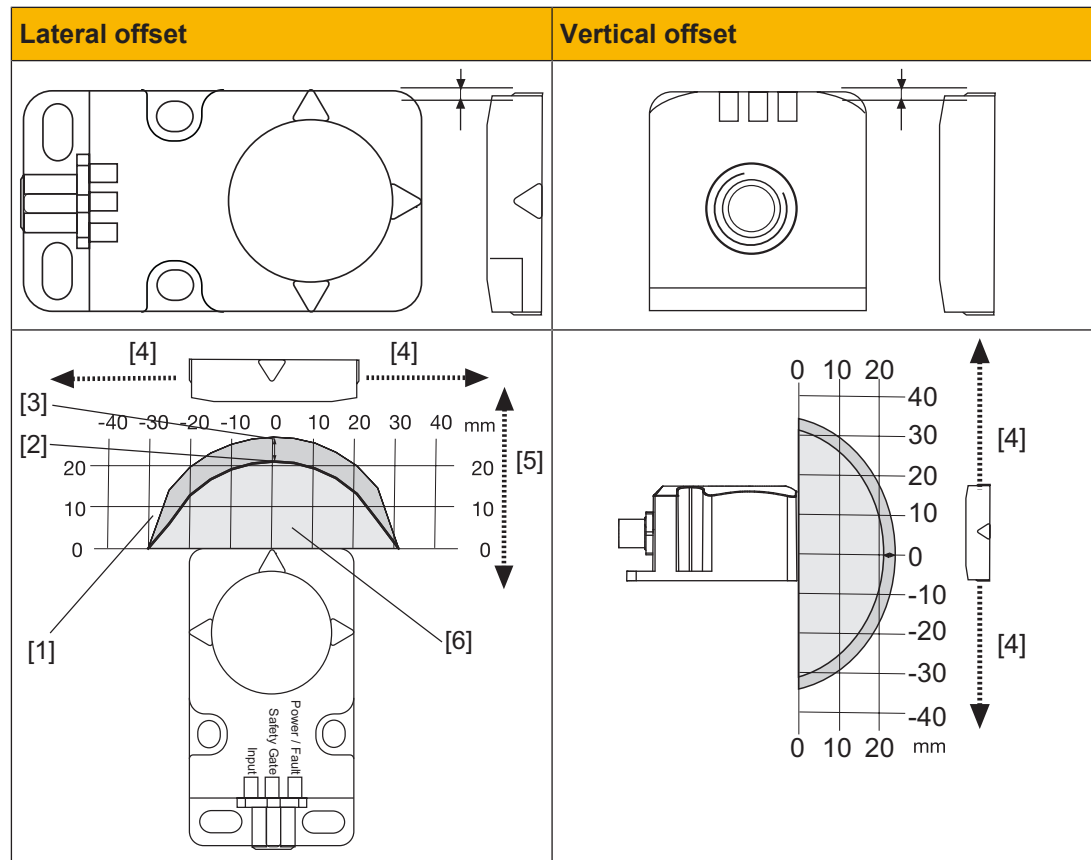

## Legend


- [1] Hysteresis
- [2] Typical operating distance  $S_o$
- [3] Typical release distance  $S_r$
- [4] Offset in mm
- [5] Operating distance in mm
- [6] Response range

## Wiring

Please note:

- ▶ Information given in the "Technical details" must be followed.
- ▶ Switch off the supply voltage before disconnecting the plug-in connection.
- ▶ Make sure that when connecting or separating the connector the pollution degree 1 or 2 is maintained.
- ▶ The supply voltage to the safety switch must be protected with a 2 A to 4 A quick-acting fuse.
- ▶ Ensure the wiring and EMC requirements of EN 60204-1 are met.
- ▶ The power supply must meet the regulations for extra low voltages with protective electrical separation (SELV, PELV).
- ▶ The power supply must have an overvoltage protection of  $\leq 35$  V DC.

### Pin assignment, connector and cable

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
|  | 5-pin M12 male connector |
|-----------------------------------------------------------------------------------|--------------------------|

| PIN | Pin designation | Function         | Wire colour |
|-----|-----------------|------------------|-------------|
| 1   | A1              | +24 UB           | Brown       |
| 2   | 12              | Output, channel1 | White       |
| 3   | A2              | 0 V UB           | Blue        |
| 4   | 22              | Output, channel2 | Black       |
| 5   | -               | Do not connect   | Grey        |

The wire colour also applies for the cable available from Pilz as an accessory.

### Connection to evaluation devices


Make sure that the selected evaluation device has the following property:

- ▶ OSSD signals are evaluated through 2 channels with plausibility monitoring

Note:

- ▶ Information given in the [Technical details](#)  [17](#) must be followed.

### Connection diagram, single connection

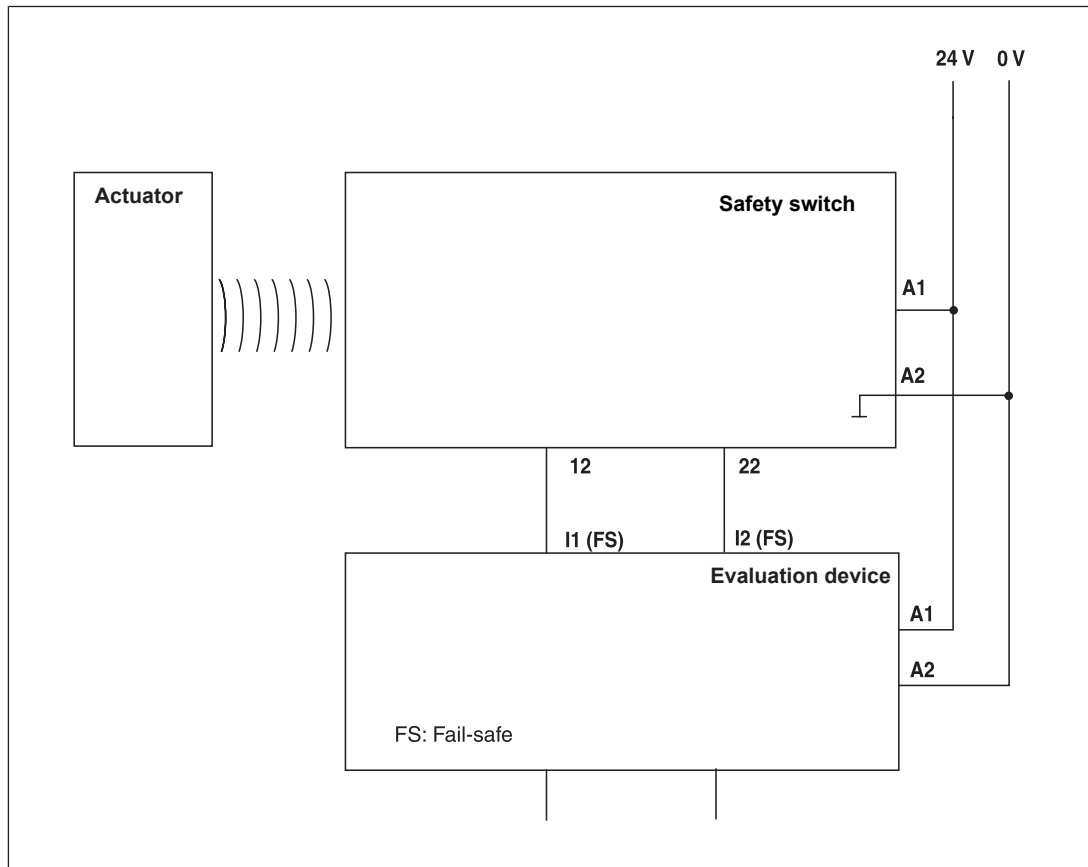

Suitable Pilz evaluation devices are, for example:


- ▶ PNOZelog for safety gate monitoring
- ▶ PNOZpower for safety gate monitoring
- ▶ PNOZsigma for safety gate monitoring
- ▶ PNOZ X for safety gate monitoring
- ▶ PNOZmulti for safety gate monitoring  
Configure the switch in the PNOZmulti Configurator with switch type 3.
- ▶ PSS for safety gate monitoring with standard function block SB064, SB066 or FS\_Safety Gate
- ▶ PSSuniversal PLC for safety gate monitoring with function block FS\_SafetyGate

The correct connection to the respective evaluation device is described in the operating manual for the evaluation device. Make sure that the connection is made in accordance with the specifications in the operating manual for the selected evaluation device.


The connections to two evaluation devices are shown on the following pages, by way of example:

- ▶ PNOZ s3 and
- ▶ PNOZmulti

### PNOZ s3

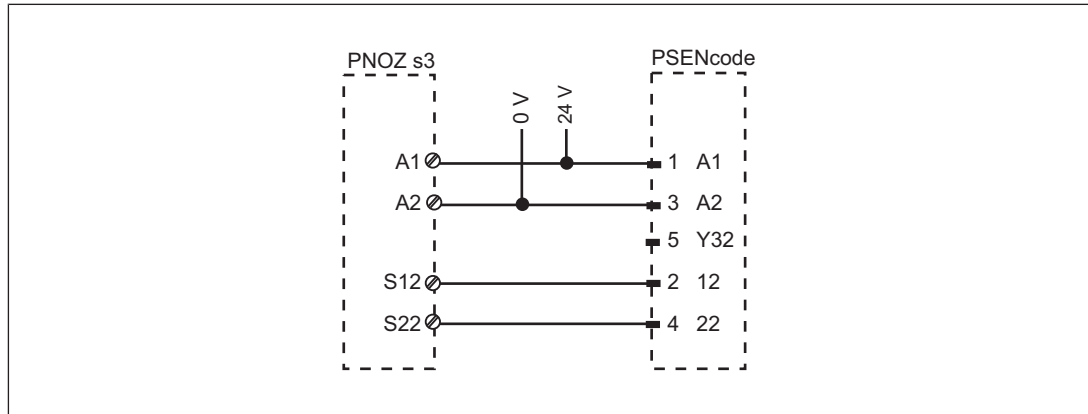

### PNOZmulti

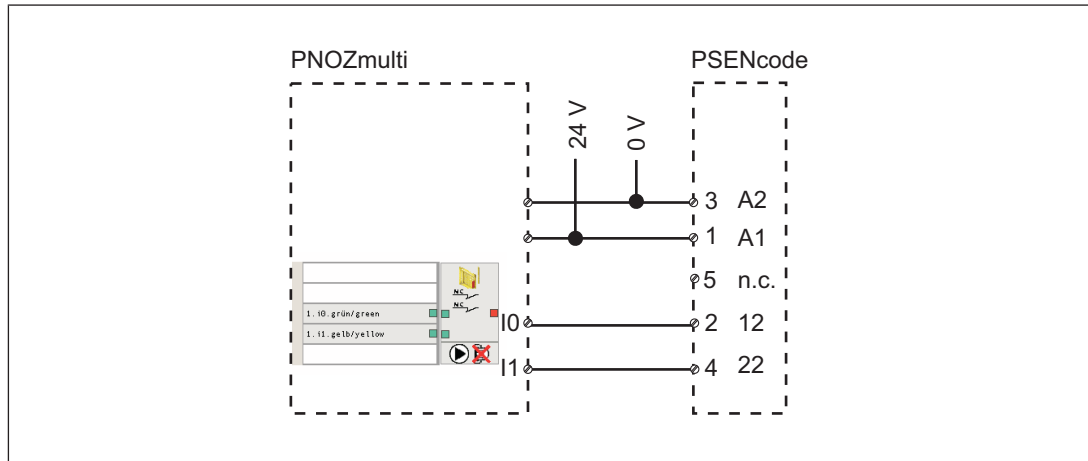

### Teaching in the actuator

The first actuator to be detected by the safety switch (see [Intended use \[6\]](#)) is taught in automatically as soon as it is brought into the response range.



#### NOTICE

No other actuator may be taught in once this actuator has been taught.

## Installation



### CAUTION!

#### Potential loss of safety function due to changed device properties

The unit's properties may be affected if installed in an environment containing electrically or magnetically conductive material.

- Please check the operating distances and the assured release distance.

- ▶ The safety switch and actuator should be installed opposite each other in parallel.
  - Make sure that the actuator is aligned to the marking on the sensor that guarantees the operating distance required by the plant design (see [Operating distances](#) [9]).
- ▶ Safety switches and actuators should be permanently secured using M5 safety screws with a flat head (e.g. M5 cheese-head or pan head screws).
- ▶ Protect the actuator from contamination.
- ▶ Torque setting: Please note the information provided under [Technical details](#) [17].
- ▶ The distance between two safety switches must be maintained (see [Technical details](#) [17]).
- ▶ Make sure that the safety switch and actuator cannot be used as an end stop.
- ▶ Please note the installation measures in accordance with EN ISO 14119 for a safety switch design 4 and with level of coding High.
- ▶ For simpler installation, the mounting brackets (see [Order reference for Accessories](#) [22]) can be used.
- ▶ If using angled connector plugs, note the defined angle of the cable routing.



### CAUTION!

#### Possible loss of the safety function by changing the release distance $S_{ar}$ with non-flush installation

Installing the safety switch non-flush within electrically or magnetically conductive material, the value for the assured release distance  $S_{ar}$  can change.

- Check the assured release distance  $S_{ar}$ .

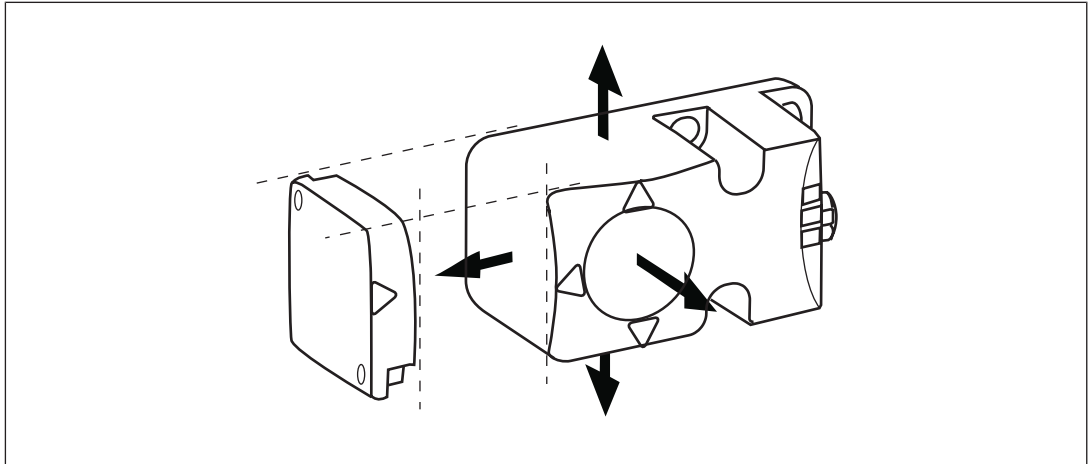
**Procedure:**

Fig.: Sensing faces on the sensor

1. Drill holes (for M5 screws) in the mounting surface to secure the actuator and sensor (see [Dimensions in mm](#) [📖 16]).
2. Use a screw to fix the sensor to the mounting surface.  
Make sure that the sensor marking that is be used for operation can be operated using the actuator from the right side.
3. Do not fully tighten the second screw on the safety switch.
4. Use a screw to fix the actuator to the mounting surface.  
Make sure that the actuator with the printed side points towards the marking on the sensor.
5. Do not fully tighten the second screw on the actuator.
6. Align the safety switch and tighten the screws.
7. Align the actuator and tighten the screws.

**Adjustment**

- The stated operating distances (see [Technical details](#) [📖 17]) only apply when the safety switch and actuator are installed facing each other in parallel. Operating distances may deviate if other arrangements are used.
- Note the maximum permitted lateral and vertical offset (see [Operating distances](#) [📖 9] and [Lateral and vertical offset](#) [📖 10]).

## Operation



### NOTICE

The safety functions should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

Check the function of the safety switch before commissioning.

### Status indicators:


- ▶ "POWER/Fault" LED lights up green: The unit is ready for operation
- ▶ "Safety Gate" LED lights up yellow: Actuator is within the response range

### Fault indicator:

- ▶ "POWER/Fault" LED lights up red: Error message.

Remedy: Rectify fault and interrupt power supply.

## Dimensions in mm

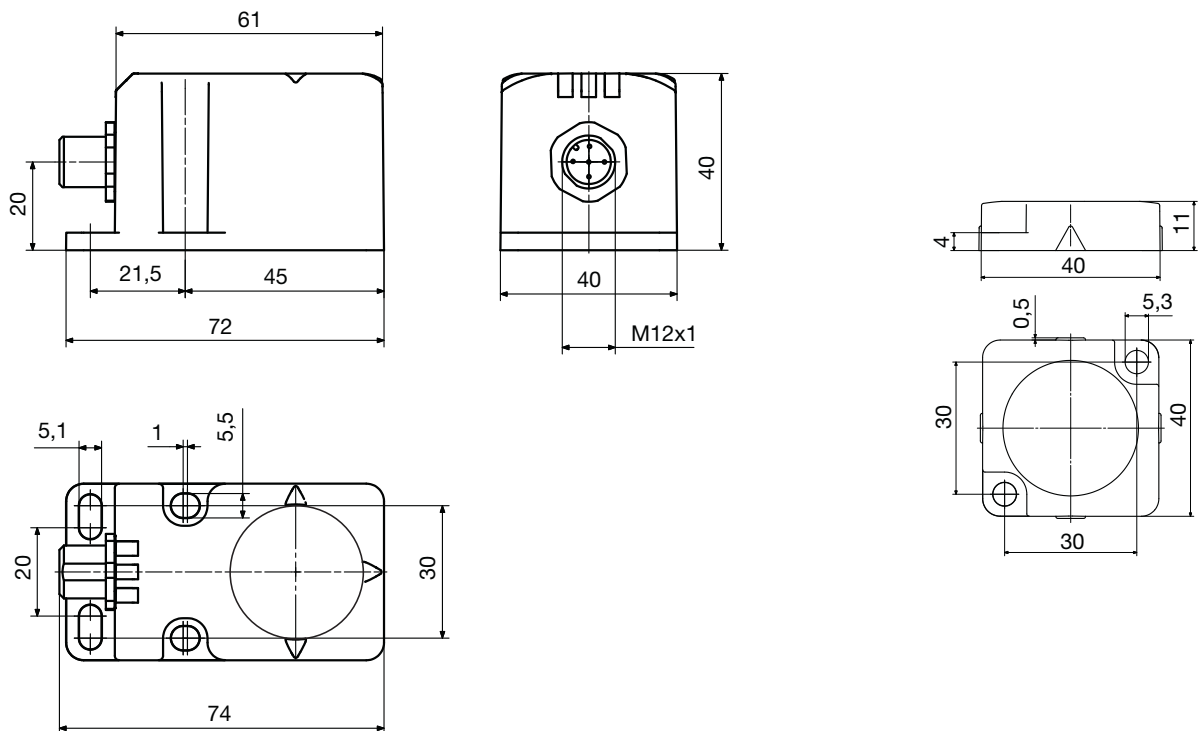

## Technical details safety switch

Where standards are undated, the 2025-09 valid editions apply.

| General                                            |                                           |
|----------------------------------------------------|-------------------------------------------|
| Certifications                                     | CE, EAC, FCC, IC, TÜV, UKCA, cULus Listed |
| Sensor's mode of operation                         | Transponders                              |
| Coding level in accordance with EN ISO 14119       | High                                      |
| Design in accordance with EN ISO 14119             | 4                                         |
| Classification in accordance with EN 60947-5-3     | PDDb                                      |
| Pilz coding type                                   | uniquely coded                            |
| Transponders                                       |                                           |
| Frequency band                                     | 122 kHz - 128 kHz                         |
| Max. transmitter output                            | 15 mW                                     |
| Electrical data                                    |                                           |
| Supply voltage                                     |                                           |
| Voltage                                            | 24 V                                      |
| Kind                                               | DC                                        |
| Voltage tolerance                                  | -20 %/+20 %                               |
| Output of external power supply (DC)               | 2 W                                       |
| Max. inrush current at UB                          | 0,12 A                                    |
| Max. switching frequency                           | 3 Hz                                      |
| Max. cable capacitance at the safety outputs       |                                           |
| No-load, PNOZ with relay contacts                  | 40 nF                                     |
| PNOZmulti, PNOZelog, PSS                           | 70 nF                                     |
| No-load current                                    | 50 mA                                     |
| Semiconductor outputs                              |                                           |
| OSSD safety outputs                                | 2                                         |
| Switching current per output                       | 500 mA                                    |
| Breaking capacity per output                       | 12 W                                      |
| Potential isolation from system voltage            | No                                        |
| Short circuit-proof                                | Yes                                       |
| Residual current at outputs                        | 10 µA                                     |
| Voltage drop at OSSDs                              | 3,5 V                                     |
| Lowest operating current                           | 0 mA                                      |
| Utilisation category in accordance with EN 60947-1 | DC-12                                     |
| Times                                              |                                           |
| Max. test pulse duration, safety outputs           | 450 µs                                    |
| Switch-on delay                                    |                                           |
| after UB is applied                                | 1 s                                       |
| Actuator typ.                                      | 80 ms                                     |
| Actuator max.                                      | 150 ms                                    |
| Delay-on de-energisation                           |                                           |
| Actuator typ.                                      | 40 ms                                     |
| Actuator max.                                      | 260 ms                                    |

**Times**

|                                            |               |
|--------------------------------------------|---------------|
| Risk time in accordance with EN 60947-5-3  | <b>260 ms</b> |
| Supply interruption before de-energisation | <b>20 ms</b>  |
| Simultaneity, channel 1 and 2 max.         | $\infty$      |

**Environmental data**

|                                 |                            |
|---------------------------------|----------------------------|
| Ambient temperature             |                            |
| in accordance with the standard | <b>EN 60068-2-14</b>       |
| Temperature range               | <b>-25 - 70 °C</b>         |
| Storage temperature             |                            |
| in accordance with the standard | <b>EN 60068-2-1/-2</b>     |
| Climatic suitability            |                            |
| in accordance with the standard | <b>EN 60068-2-78</b>       |
| Humidity                        | <b>93 % r. h. at 40 °C</b> |
| EMC                             | <b>EN 60947-5-3</b>        |
| Vibration                       |                            |
| in accordance with the standard | <b>EN 60947-5-2</b>        |
| Frequency                       | <b>10 - 55 Hz</b>          |
| Amplitude                       | <b>1 mm</b>                |
| Shock stress                    |                            |
| in accordance with the standard | <b>EN 60947-5-2</b>        |
| Acceleration                    | <b>30g</b>                 |
| Duration                        | <b>11 ms</b>               |
| Airgap creepage                 |                            |
| Overvoltage category            | <b>III</b>                 |
| Pollution degree                | <b>3</b>                   |
| Rated insulation voltage        | <b>75 V</b>                |
| Rated impulse withstand voltage | <b>0,8 kV</b>              |
| Protection type                 |                            |
| Housing                         | <b>IP67</b>                |

**Operating distances**

|                                                       |                   |
|-------------------------------------------------------|-------------------|
| Assured operating distance Sao                        | <b>15 mm</b>      |
| Typical operating distance So                         | <b>21 mm</b>      |
| Assured release distance Sar                          | <b>40 mm</b>      |
| Typical release distance Sr                           | <b>32 mm</b>      |
| Repetition accuracy switching distances               | <b>10 %</b>       |
| Change of operating distance with temperature changes | <b>+0,01mm/°C</b> |
| Typ. hysteresis                                       | <b>3 mm</b>       |

**Mechanical data**

|                                                           |                                            |
|-----------------------------------------------------------|--------------------------------------------|
| Actuator 1                                                | <b>PSEN cs2.1</b>                          |
| Min. distance between safety switches                     | <b>400 mm</b>                              |
| Sensor flush installation in accordance with EN 60947-5-2 | <b>yes, follow installation guidelines</b> |
| Connection type                                           | <b>M12, 5-pin male connector</b>           |

**Mechanical data**

|                                    |              |
|------------------------------------|--------------|
| Material                           |              |
| Top                                | <b>PBT</b>   |
| Max. fixing screws torque settings | <b>1 Nm</b>  |
| Dimensions                         |              |
| Height                             | <b>75 mm</b> |
| Width                              | <b>40 mm</b> |
| Depth                              | <b>40 mm</b> |
| Weight of safety switch            | <b>130 g</b> |
| Weight                             | <b>130 g</b> |

**Technical details actuator****General**

|                                              |                                    |
|----------------------------------------------|------------------------------------|
| Certifications                               | <b>CE, TÜV, UKCA, cULus Listed</b> |
| Sensor's mode of operation                   | <b>Transponders</b>                |
| Coding level in accordance with EN ISO 14119 | <b>High</b>                        |
| Pilz coding type                             | <b>fully coded</b>                 |

**Transponders**

|                |                          |
|----------------|--------------------------|
| Frequency band | <b>122 kHz - 128 kHz</b> |
|----------------|--------------------------|

**Environmental data**

|                                 |                            |
|---------------------------------|----------------------------|
| Ambient temperature             |                            |
| in accordance with the standard | <b>EN 60068-2-14</b>       |
| Temperature range               | <b>-25 - 70 °C</b>         |
| Storage temperature             |                            |
| in accordance with the standard | <b>EN 60068-2-1/-2</b>     |
| Temperature range               | <b>-40 - 85 °C</b>         |
| Climatic suitability            |                            |
| in accordance with the standard | <b>EN 60068-2-78</b>       |
| Humidity                        | <b>93 % r. h. at 40 °C</b> |
| EMC                             | <b>EN 60947-5-3</b>        |
| Vibration                       |                            |
| in accordance with the standard | <b>EN 60947-5-2</b>        |
| Frequency                       | <b>10 - 55 Hz</b>          |
| Amplitude                       | <b>1 mm</b>                |
| Shock stress                    |                            |
| in accordance with the standard | <b>EN 60947-5-2</b>        |
| Acceleration                    | <b>30g</b>                 |
| Duration                        | <b>11 ms</b>               |
| Protection type                 |                            |
| Housing                         | <b>IP6K9K</b>              |

**Mechanical data**

|                                    |             |
|------------------------------------|-------------|
| Material                           |             |
| Top                                | <b>PBT</b>  |
| Max. fixing screws torque settings | <b>1 Nm</b> |

**Mechanical data**

## Dimensions

|        |       |
|--------|-------|
| Height | 11 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 40 mm |
|-------|-------|

|       |       |
|-------|-------|
| Depth | 40 mm |
|-------|-------|

|        |      |
|--------|------|
| Weight | 20 g |
|--------|------|

---

**Classification according to ZVEI, CB24I**

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

**Single-pole output****Interfaces**

## Source

|           |        |
|-----------|--------|
| Interface | Sensor |
| Class     | C2     |

---

## Drain

|           |                   |
|-----------|-------------------|
| Interface | Evaluation device |
| Class     | C1, C2            |

**Source parameters**

|                          |        |
|--------------------------|--------|
| Max. test pulse duration | 450 µs |
|--------------------------|--------|

|                    |       |
|--------------------|-------|
| Max. rated current | 0,5 A |
|--------------------|-------|

|                      |       |
|----------------------|-------|
| Max. capacitive load | 40 nF |
|----------------------|-------|

---

## Safety characteristic data



### NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

| Operating mode | EN ISO 13849-1: 2023 | EN ISO 13849-1: 2023 | EN IEC 62061 SIL CL/max. | EN IEC 62061 61508 | EN/IEC 61511 61508 | EN/IEC 61511 61508 | EN ISO 13849-1: 2023  |
|----------------|----------------------|----------------------|--------------------------|--------------------|--------------------|--------------------|-----------------------|
|                | PL                   | Category             | SIL                      | PFH [1/h]          | SIL                | PFD                | T <sub>M</sub> [year] |
| 2-ch. OSSD     | PL e                 | Cat. 4               | SIL CL 3                 | 4,10E-09           | –                  | 1,10E-04           | 20                    |

Explanatory notes for the safety-related characteristic data:

- T<sub>M</sub> is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN IEC 61508-6 and EN IEC 61511 and as the proof test interval and mission time in accordance with EN IEC 62061.

All the units used within a safety function must be considered when calculating the safety characteristic data.



### INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the products used and may differ from these.

## Supplementary data

### Radio approval

#### USA/Canada



FCC ID: VT8-PSENCs1  
IC: 7482A-PSENCs1

#### FCC/IC-Requirements:

This product complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standards.

Operation is subject to the following two conditions:

- 1) this product may not cause harmful interference, and
- 2) this product must accept any interference received, including interference that may cause undesired operation.

Changes or modifications made to this product not expressly approved by Pilz may void the FCC authorization to operate this equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Le présent produit est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) le produit ne doit pas produire de brouillage, et
- (2) l'utilisateur de le produit doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## Order reference

### Safety switch

| Product type         | Features                      | Connection type          | Order no. |
|----------------------|-------------------------------|--------------------------|-----------|
| PSEN cs2.2n (switch) | Safety switch, uniquely coded | 5-pin M12 male connector | 540253    |

### Actuator

| Product type          | Features                                            | Product ID |
|-----------------------|-----------------------------------------------------|------------|
| PSEN cs2.1 1 actuator | Actuator, coded, for coded safety switches PSENcode | 540180     |

### Complete systems

| Product type             | Features                           | Connection type          | Order no. |
|--------------------------|------------------------------------|--------------------------|-----------|
| PSEN cs2.2n / PSEN cs2.1 | Safety gate system, uniquely coded | 5-pin M12 male connector | 540203    |

### Accessories

#### Installation material

| Product type                 | Features                                                                                                                                                              | Order no. |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| PSEN bracket                 | Mounting bracket                                                                                                                                                      | 532110    |
| PSEN mag/cs bracket straight | Mounting aid                                                                                                                                                          | 532111    |
| PSEN screw M4x20 10pcs       | Safety screws made from stainless steel with one-way slot                                                                                                             | 540313    |
| PSEN screw M4x26 10pcs       | Safety screws made from stainless steel with one-way slot                                                                                                             | 540314    |
| PSEN screw M5x10 10pcs       | Safety screws made from stainless steel with one-way slot                                                                                                             | 540311    |
| PSEN screw M5x20 10pcs       | Safety screws made from stainless steel with one-way slot                                                                                                             | 540312    |
| PSEN cs1/2 bracket cable fix | Mechanical protection against defeat, protecting against unauthorised cable disconnection or damage for safety switches PSENcode cs1/2, PSENcode cs5/6 M12, PSENslock | 532112    |

### Cable

| Product type              | Connection 1                 | Connection 2                    | Length | Order No. |
|---------------------------|------------------------------|---------------------------------|--------|-----------|
| PSS67/PDP67 cable M12-5sf | straight, M12, 5-pin, socket | straight, M12, 5-pin, connector | 3 m    | 380208    |
|                           |                              |                                 | 5 m    | 380209    |
|                           |                              |                                 | 10 m   | 380210    |
|                           |                              |                                 | 20 m   | 380220    |
|                           |                              |                                 | 30 m   | 380211    |

| Product type              | Connection 1                                  | Connection 2                  | Length | Order No. |
|---------------------------|-----------------------------------------------|-------------------------------|--------|-----------|
| PSS67/PDP67 cable M12-5af | Angled, M12, 5-pin, socket                    | Angled, M12, 5-pin, connector | 3 m    | 380212    |
|                           |                                               |                               | 5 m    | 380213    |
|                           |                                               |                               | 10 m   | 380214    |
|                           |                                               |                               | 30 m   | 380215    |
| PSEN cable M12-5sf        | straight, M12, 5-pin, socket                  | Open cable                    | 3 m    | 630310    |
|                           |                                               |                               | 5 m    | 630311    |
|                           |                                               |                               | 10 m   | 630312    |
|                           |                                               |                               | 20 m   | 630298    |
|                           |                                               |                               | 30 m   | 630297    |
| PSEN cable M12-5af        | Angled, M12, 5-pin, socket                    | Open cable                    | 3 m    | 630347    |
|                           |                                               |                               | 5 m    | 630348    |
|                           |                                               |                               | 10 m   | 630349    |
|                           |                                               |                               | 30 m   | 630350    |
| PDP67 F 8DI ION           | Decentralised input module IP67 for PNOZmulti |                               |        | 773600    |

### EC declaration of conformity

This product/these products meet(s) the requirements of the following directives of the European Parliament and of the Council.

- ▶ 2006/42/EC on machines
- ▶ 2014/53/EU on radio equipment

The complete EC Declaration of Conformity is available on the Internet at [www.pilz.com/downloads](http://www.pilz.com/downloads).

Representative: Pilz GmbH & Co. KG, Felix-Wankel-Str. 2, 73760 Ostfildern, Germany

### UKCA-Declaration of Conformity

This product(s) complies with following UK legislation:

- ▶ Supply of Machinery (Safety) Regulations 2008
- ▶ Radio Equipment Regulations 2017

The complete UKCA Declaration of Conformity is available on the Internet at [www.pilz.com/downloads](http://www.pilz.com/downloads).

Representative: Pilz Automation Technology, Pilz House, Little Colliers Field, Corby, Northamptonshire, NN18 8TJ United Kingdom, eMail: [mail@pilz.co.uk](mailto:mail@pilz.co.uk)

► Support

Technical support is available from Pilz round the clock.

## Americas

Brazil

+55 11 97569-2804

Canada

+1 888 315 7459

Mexico

+52 55 5572 1300

USA (toll-free)

+1 877-PILZUSA (745-9872)

## Asia

China

+86 400-088-3566

## Japan

+81 45 471-2281

## South Korea

+82 31 778 3390

## Australia and Oceania

Australia

+61 3 95600621

## New Zealand

+64 9 6345350

## Europe

Austria

+43 1 7986263-444

Belgium, Luxembourg

+32 9 3217570

France

+33 3 88104003

Germany

+49 711 3409-444

Ireland

+353 21 4804983

Italy, Malta

+39 0362 1826711

Pilz develops environmentally-friendly products using ecological materials and energy-saving technologies. Offices and production facilities are ecologically designed, environmentally-aware and energy-saving. So Pilz offers sustainability, plus the security of using energy-efficient products and environmentally-friendly solutions.



We are represented internationally. Please refer to our homepage [www.pilz.com](http://www.pilz.com) for further details or contact our headquarters.

Headquarters: Pilz GmbH & Co. KG, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany  
Telephone: +49 711 3409-0, E-Mail: [info@pilz.com](mailto:info@pilz.com), Internet: [www.pilz.com](http://www.pilz.com)

**PILZ**  
THE SPIRIT OF SAFETY

CECE, CHRE, CMSE® INDUSTRIAL PI®, Leansafe®, Myze®, PAS4000®, PAScal®, PASconfig®, Pliz®, PTT®, PMCQrimo®, PMCProtego®, PMCIendo®, PMD®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, THE SPIRIT OF SAFETY® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries. We would point out that product features may vary from the details stated in this document, depending on the status at the time of publication and the scope of the equipment. We accept no responsibility for the validity, accuracy and entirety of the text and graphics presented in this information. Please contact our Technical Support if you have any questions.