



Modular safety relay myPNOZ

PILZ
THE SPIRIT OF SAFETY

► Safety relays

**This system description is valid for modules with Hardware Version 01.
The operating manual is valid from Hardware Version 02.**

This document is the original document.

All rights to this documentation are reserved by Pilz GmbH & Co. KG. Copies may be made for the user's internal purposes. Suggestions and comments for improving this documentation will be gratefully received.

Source code from third-party manufacturers or open source software has been used for some components. The relevant licence information is available on the Internet on the Pilz homepage.

Pilz®, PIT®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, the spirit of safety® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries.



SD means Secure Digital

1	Introduction	8
1.1	Validity of documentation	8
1.2	Using the documentation	8
1.3	Third-party manufacturer licence information	8
1.4	Definition of symbols	8
2	Safety	10
2.1	Intended use	10
2.2	Safety regulations	10
2.2.1	Safety assessment	10
2.2.2	Use of qualified personnel	10
2.2.3	Warranty and liability	11
2.2.4	Disposal	11
3	Overview	12
4	Structure of myPNOZ	13
4.1	Application logic	17
5	Configuration	18
5.1	Configuration with myPNOZ Creator	18
5.2	Change configuration	18
5.3	Start types	19
5.3.1	Timing diagram for automatic and manual start	20
5.3.2	Timing diagram for monitored start with rising edge	20
5.3.3	Timing diagram for monitored start with rising and falling edge	21
5.3.4	Timing diagram for start with start-up test	21
5.4	Set start type and test pulse evaluation	21
5.5	Delay times	22
5.6	Set delay time	22
6	Reaction times	25
7	Consideration of the safety-related characteristic data	27
8	Installation and removal	29
8.1	Connect modules	30
8.2	Install myPNOZ on the mounting rail	31
8.3	Remove/exchange modules	31
8.4	Remove plug-in terminals	32
8.5	Mounting distances	33
9	Wiring	34
9.1	Connect the supply voltage	34
9.2	Connect control or switching elements to the inputs	35
9.3	Connect start button	37
9.4	Wire outputs	37
9.5	Connect feedback loop	38

10	Commissioning	40
11	Operation	41
12	Diagnostics	42
12.1	Status messages	42
12.2	Error messages	44
12.3	Errors on the safe outputs	49
13	Maintenance and testing	50
13.1	Function test of the relay outputs	50
14	Head modules	51
14.1	PNOZ yh1 2DI 24VDC	51
14.1.1	Device features	51
14.1.2	Front view	52
14.1.3	Block diagram	53
14.1.4	Dimensions	53
14.1.5	Technical details	54
14.1.6	Safety characteristic data	57
14.1.7	Classification according to ZVEI, CB24I	58
14.1.8	Order reference	58
14.1.8.1	Product	58
14.1.8.2	Accessories	58
15	Expansion modules	59
15.1	PNOZ yi1 4DI	59
15.1.1	Device features	59
15.1.2	Front view	60
15.1.3	Block diagram	61
15.1.4	Dimensions	61
15.1.5	Technical details	62
15.1.6	Safety characteristic data	64
15.1.7	Classification according to ZVEI, CB24I	65
15.1.8	Order reference	65
15.1.8.1	Product	65
15.1.8.2	Accessories	65
15.2	PNOZ yi2 4DI OR	66
15.2.1	Device features	66
15.2.2	Front view	67
15.2.3	Block diagram	67
15.2.4	Dimensions	68
15.2.5	Technical details	68
15.2.6	Safety characteristic data	71
15.2.7	Classification according to ZVEI, CB24I	72
15.2.8	Order reference	72
15.2.8.1	Product	72
15.2.8.2	Accessories	72
15.3	PNOZ yi3 2DI T3A	73

15.3.1	Device features	73
15.3.2	Front view	74
15.3.3	Block diagram	74
15.3.4	Dimensions	75
15.3.5	Technical details	75
15.3.6	Safety characteristic data	78
15.3.7	Classification according to ZVEI, CB24I	79
15.3.8	Order reference	79
15.3.8.1	Product	79
15.3.8.2	Accessories	79
15.4	PNOZ yi4 2DI T3C	80
15.4.1	Device features	80
15.4.2	Front view	81
15.4.3	Block diagram	81
15.4.4	Dimensions	82
15.4.5	Technical details	82
15.4.6	Safety characteristic data	85
15.4.7	Classification according to ZVEI, CB24I	86
15.4.8	Order reference	86
15.4.8.1	Product	86
15.4.8.2	Accessories	86
15.5	PNOZ yo1 2SO	87
15.5.1	Device features	87
15.5.2	Front view	88
15.5.3	Block diagram	89
15.5.4	Dimensions	89
15.5.5	Technical details	90
15.5.6	Safety characteristic data	92
15.5.7	Classification according to ZVEI, CB24I	93
15.5.8	Order reference	93
15.5.8.1	Product	93
15.5.8.2	Accessories	93
15.6	PNOZ yo2 3NO	94
15.6.1	Device features	94
15.6.2	Front view	95
15.6.3	Block diagram	95
15.6.4	Dimensions	96
15.6.5	Technical details	96
15.6.6	Safety characteristic data	99
15.6.7	Classification according to ZVEI, CB24I	100
15.6.8	Supplementary data	101
15.6.8.1	Permitted operating height	101
15.6.8.2	Service life graph	101
15.6.9	Order reference	102
15.6.9.1	Product	102
15.6.9.2	Accessories	102
15.7	PNOZ yo3 1SO 1SO t	103
15.7.1	Device features	103
15.7.2	Front view	104

15.7.3	Block diagram	105
15.7.4	Dimensions	105
15.7.5	Technical details	106
15.7.6	Safety characteristic data	109
15.7.7	Classification according to ZVEI, CB24I	110
15.7.8	Order reference	110
15.7.8.1	Product	110
15.7.8.2	Accessories	110
15.8	PNOZ yo4 3NO t	111
15.8.1	Device features	111
15.8.2	Front view	112
15.8.3	Block diagram	113
15.8.4	Dimensions	113
15.8.5	Technical details	114
15.8.6	Safety characteristic data	117
15.8.7	Classification according to ZVEI, CB24I	118
15.8.8	Supplementary data	118
15.8.8.1	Permitted operating height	118
15.8.8.2	Service life graph	119
15.8.9	Order reference	120
15.8.9.1	Product	120
15.8.9.2	Accessories	120
15.9	PNOZ yio1 2DI 2SO	121
15.9.1	Device features	121
15.9.2	Front view	122
15.9.3	Block diagram	123
15.9.4	Dimensions	123
15.9.5	Technical details	124
15.9.6	Safety characteristic data	127
15.9.7	Classification according to ZVEI, CB24I	128
15.9.8	Order reference	128
15.9.8.1	Product	128
15.9.8.2	Accessories	129
15.10	PNOZ yio2 2DI 3NO	130
15.10.1	Device features	130
15.10.2	Front view	131
15.10.3	Block diagram	132
15.10.4	Dimensions	132
15.10.5	Technical details	133
15.10.6	Safety characteristic data	137
15.10.7	Classification according to ZVEI, CB24I	138
15.10.8	Supplementary data	138
15.10.8.1	Permitted operating height	138
15.10.8.2	Service life graph	139
15.10.9	Order reference	140
15.10.9.1	Product	140
15.10.9.2	Accessories	140
15.11	PNOZ yio3 2DI 1SO 1SO t	141
15.11.1	Device features	141

15.11.2	Front view	142
15.11.3	Block diagram	143
15.11.4	Dimensions	143
15.11.5	Technical details	144
15.11.6	Safety characteristic data	147
15.11.7	Classification according to ZVEI, CB24I	148
15.11.8	Order reference	148
15.11.8.1	Product	148
15.11.8.2	Accessories	149
15.12	PNOZ yio4 2DI 3NO t	150
15.12.1	Device features	150
15.12.2	Front view	151
15.12.3	Block diagram	152
15.12.4	Dimensions	152
15.12.5	Technical details	153
15.12.6	Safety characteristic data	157
15.12.7	Classification according to ZVEI, CB24I	158
15.12.8	Supplementary data	158
15.12.8.1	Permitted operating height.....	158
15.12.8.2	Service life graph	159
15.12.9	Order reference	160
15.12.9.1	Product	160
15.12.9.2	Accessories	160
16	EC declaration of conformity	161

1 Introduction

1.1 Validity of documentation

This documentation is valid for the product Description myPNOZ. The versions from which this documentation is valid can vary from module to module and so the version is stated in the modules' data sheets.

This operating manual explains the function and operation, describes the installation and provides guidelines on how to connect the product.

1.2 Using the documentation

This document is intended for instruction. Only install and commission the product if you have read and understood this document. The document should be retained for future reference.

1.3 Third-party manufacturer licence information

The myPNOZ head modules and expansion module include Open Source software of various licences. You can receive further information in the document "Third-party manufacturer licence information myPNOZ head module" (document number 1005617) and "Third-party manufacturer licence information myPNOZ expansion module" (document number 1005618) under www.pilz.com.

1.4 Definition of symbols

Information that is particularly important is identified as follows:



DANGER!

This warning must be heeded! It warns of a hazardous situation that poses an immediate threat of serious injury and death and indicates preventive measures that can be taken.



WARNING!

This warning must be heeded! It warns of a hazardous situation that could lead to serious injury and death and indicates preventive measures that can be taken.



CAUTION!

This refers to a hazard that can lead to a less serious or minor injury plus material damage, and also provides information on preventive measures that can be taken.

**NOTICE**

This describes a situation in which the product or devices could be damaged and also provides information on preventive measures that can be taken. It also highlights areas within the text that are of particular importance.

**INFORMATION**

This gives advice on applications and provides information on special features.

2 Safety

2.1 Intended use

The modular safety relay myPNOZ provides a safety-related interruption of a safety circuit.

The modular safety relay myPNOZ meets the requirements of EN 60947-5-1 and EN 60204-1 and may be used in applications with

- ▶ Safety switches with N/C or N/O contact, such as E-STOP pushbutton or safety gate switch
- ▶ Safety switch with detection of shorts across contacts, such as light curtains
- ▶ Two-hand pushbuttons in accordance with EN 574 Type III A or III C

The following is deemed improper use in particular

- ▶ Any component, technical or electrical modification to the product,
- ▶ Use of the product outside the areas described in this document,
- ▶ Use of the product outside the technical details (see [Technical details](#) [ 54]).



NOTICE

EMC-compliant electrical installation

The product is designed for use in an industrial environment. The product may cause interference if installed in other environments. If installed in other environments, measures should be taken to comply with the applicable standards and directives for the respective installation site with regard to interference.

2.2 Safety regulations

2.2.1 Safety assessment

Before using a device, a safety assessment in accordance with the Machinery Directive is required.

The product as an individual component fulfils the functional safety requirements in accordance with IEC 61508, EN ISO 13849 and EN 62061. However, this does not guarantee the functional safety of the overall plant/machine. To achieve the relevant safety level of the overall plant/machine's required safety functions, each safety function needs to be considered separately.

2.2.2 Use of qualified personnel

The products may only be assembled, installed, programmed, commissioned, operated, maintained and decommissioned by persons who are competent to do so.

A competent person is a qualified and knowledgeable person who, because of their training, experience and current professional activity, has the specialist knowledge required. To be able to inspect, assess and operate devices, systems and machines, the person has to be informed of the state of the art and the applicable national, European and international laws, directives and standards.

It is the company's responsibility only to employ personnel who

- ▶ Are familiar with the basic regulations concerning health and safety / accident prevention,
- ▶ Have read and understood the information provided in the section entitled Safety
- ▶ Have a good knowledge of the generic and specialist standards applicable to the specific application.

2.2.3 Warranty and liability

All claims to warranty and liability will be rendered invalid if

- ▶ The product was used contrary to the purpose for which it is intended,
- ▶ Damage can be attributed to not having followed the guidelines in the operating manual,
- ▶ Operating personnel are not suitably qualified,
- ▶ Any type of modification has been made (e.g. exchanging components on the PCB boards, soldering work etc.).

2.2.4 Disposal

- ▶ In safety-related applications, please comply with the mission time T_M in the safety-related characteristic data.
- ▶ When decommissioning, please comply with local regulations regarding the disposal of electronic devices (e.g. Electrical and Electronic Equipment Act).


3 Overview

myPNOZ is a modular safety relay, which can be used to implement various safety functions without the need for programming. A safety function can be achieved through the combination and wiring of the respective myPNOZ components. The “plug and play” principle was in the foreground during development, without compromising on safety requirements. With myPNOZ it is easy to implement safety functions up to PL e of EN ISO 13849 and SIL CL 3 of EN 62061 and SIL 3 of IEC 61508.

You create your individual myPNOZ using the web application **myPNOZ Creator**. It's a simple process requiring no knowledge of programming. All you need to do is define the required safety functions and how they are linked.

Pilz then assembles your myPNOZ from the various modules, before setting it up and testing it.

Your myPNOZ arrives “ready-to-install”. All you need to do is install it in the control cabinet and wire it up. After testing the safety functions, myPNOZ is operational.

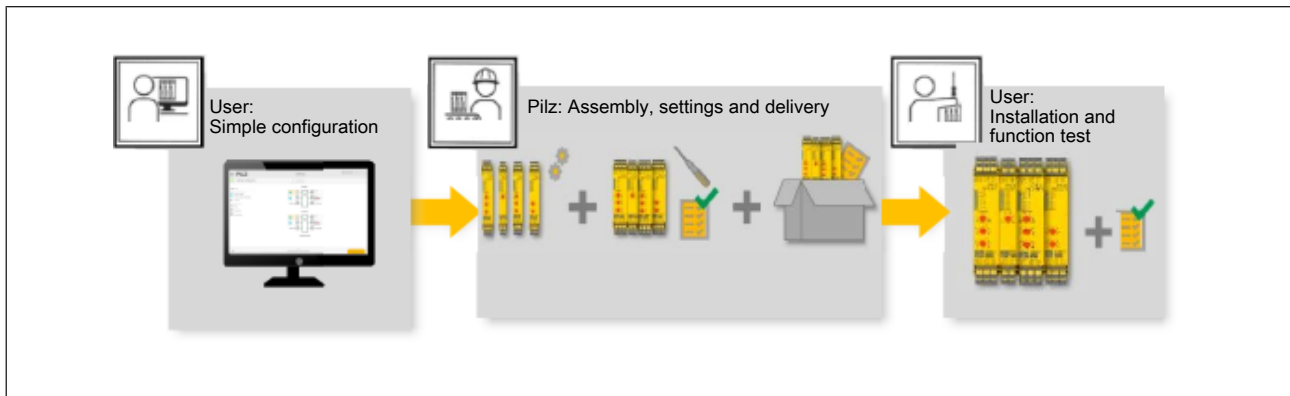

An example in the "myPNOZ Getting Started" manual describes how to configure and commission in practice a myPNOZ that has been adapted to individual requirements.

4 Structure of myPNOZ

myPNOZ is used to implement safety functions on applications with, for example:


- ▶ E-STOP pushbuttons
- ▶ Safety gate switches
- ▶ Light curtains
- ▶ Two-hand pushbuttons

myPNOZ consists of modules that are linked together via internal logic. Various applications can be implemented in this way, purely through the sequence of the modules. Rotary switches can be used to make additional settings, such as various start types for individual applications for example. The configuration, which consists of the sequence of the modules and the position of the rotary switches, is stored in the myPNOZ. The sensors and command devices connected to the inputs are monitored; incoming signals are evaluated and the outputs switched accordingly.

Properties:

- ▶ A modular safety relay myPNOZ consists of a head module and one or more expansion modules.
- ▶ Up to 8 expansion modules can be added.
- ▶ The head module and expansion modules are connected via bus connectors.
- ▶ The modules have inputs, safe outputs using relay and semiconductor technology, plus signal outputs for non-safety-related applications.
- ▶ The logic connection of the inputs and the switching of the outputs is determined by the sequence of the expansion modules, which are arranged to the right of the head module.
- ▶ Test pulse outputs enable detection of shorts across contacts.
- ▶ Rotary switches can be used to set start types, delay times and test pulse evaluation.
- ▶ The LEDs on the head module and expansion modules indicate the status of the myPNOZ and any errors.
- ▶ A rotary switch on the head module is used to save the configuration, protecting it from being changed accidentally.

Example of myPNOZ: Head module with expansion modules

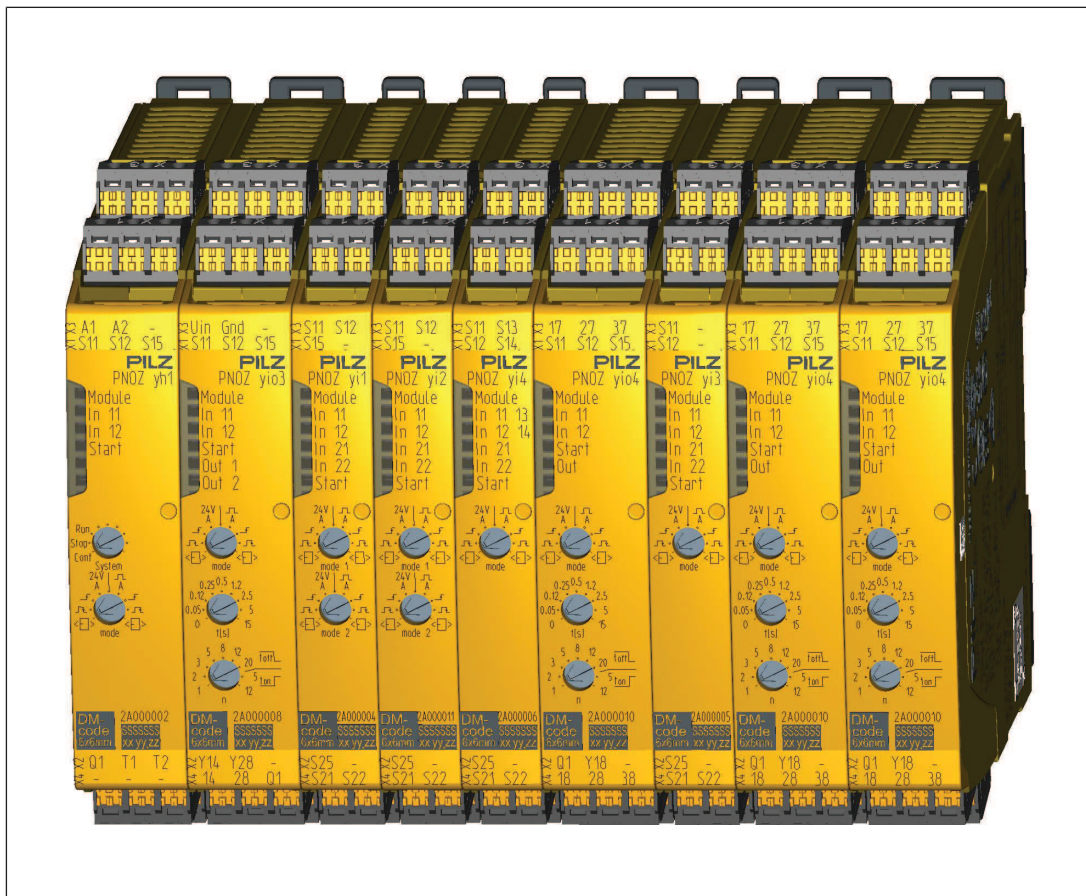

Modules

The modules are described in detail in the chapters entitled [Head modules](#) [51] and [Expansion modules](#) [59]. The table contains an overview of the key properties.





Module	Description
Head module	
PNOZ yh1 2DI 24VDC	▶ Supply voltage for myPNOZ ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ 2 test pulse outputs to detect shorts across contacts ▶ 1 signal output, e.g. for display
Input modules	
PNOZ yi1 4DI	▶ 2 input functions to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ Input functions are AND-linked
PNOZ yi2 4DI OR	▶ 2 input functions to connect safety gate switch or light curtain and start button ▶ Input functions are OR-linked

Module	Description
PNOZ yi3 2DI T3A	▶ 1 input function to connect a two-hand pushbutton (Type III A) ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ Input functions are AND-linked
PNOZ yi4 2DI T3C	▶ 1 input function to connect a two-hand pushbutton (Type III C) ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ Input functions are AND-linked
Input and output modules	
PNOZ yio1 2DI 2SO	▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ 2 output functions, each with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop ▶ Supply voltage connection for the semiconductor outputs ▶ 1 signal output, e.g. for display
PNOZ yio2 2DI 3NO	▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ 1 output function with 3 safe relay outputs, positive-guided, instantaneous, and 1 input for feedback loop ▶ 1 signal output, e.g. for display
PNOZ yio3 2DI 1SO 1SO t	▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ 1 output function with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop ▶ 1 output function with 1 safe semiconductor output, delayed, and 1 input for feedback loop ▶ Supply voltage connection for the semiconductor outputs ▶ 1 signal output, e.g. for display
PNOZ yio4 2DI 3NO t	▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button ▶ 1 output function with 3 safe relay outputs, positive-guided, delayed, and 1 input for feedback loop ▶ 1 signal output, e.g. for display
Output modules	
PNOZ yo1 2SO	▶ 2 output functions, each with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop ▶ Supply voltage connection for the semiconductor outputs ▶ 1 signal output, e.g. for display

Module	Description
PNOZ yo2 3NO	▶ 1 safe output function with 3 safe relay outputs, positive-guided, instantaneous, and 1 input for feedback loop ▶ 1 signal output, e.g. for display
PNOZ yo3 1SO 1SO t	▶ 1 output function with 1 semiconductor output, instantaneous, and 1 input for feedback loop ▶ 1 output function with 1 semiconductor output, delayed, and 1 input for feedback loop ▶ Supply voltage connection for the semiconductor outputs ▶ 1 signal output, e.g. for display
PNOZ yo4 3NO t	▶ 1 safe output function with 3 safe relay outputs, positive-guided, delayed, and 1 input for feedback loop ▶ 1 signal output, e.g. for display

4.1 Application logic

The plug-in sequence of the expansion modules determines the logic connection of the inputs and the switching of the outputs. The plug-in sequence also enables several logic functions to be implemented, which are called zones.

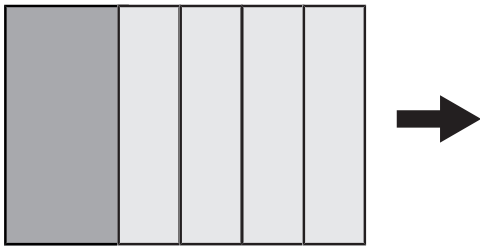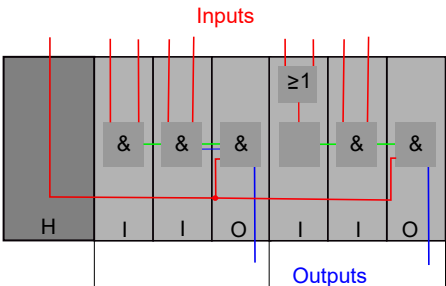 Head module Expansion modules	▶ The head module is always on the left. ▶ Expansion modules can be added to the right of the head module. Expansion modules provide inputs and outputs
 Inputs Outputs	▶ The input (e.g. E-STOP) on the head module (H) affects all the outputs (O) on the myPNOZ and is AND-linked to the inputs on the input modules (I). ▶ The inputs on the input modules (I) are AND-linked and switch the subsequent outputs on the output module or modules (O). ▶ The inputs on the OR input module are OR-linked. ▶ The last module on a myPNOZ must always be an output module (O) or a combined input and output module (I/O).
 Inputs Output	▶ Combined input and output modules (I/O) act like an input module followed by an output module.
 Inputs Outputs Zone 1 Zone 2	▶ If an output module (O) is followed by an input module (I) or an input and output module (I/O), a new zone starts. Zone 1 and Zone 2 operate independently from each other. The input (e.g. E-STOP) on the head module (H) affects the outputs (O) of both zones.

5 Configuration

The type and number of safety functions that you need and how these are linked together are the basis of the configuration. On this basis you can determine the configuration, taking the application logic into account. A much more convenient way to perform the configuration is with the web application myPNOZ Creator. The defined configuration can then be ordered directly in the E-Shop (see [Configuration with myPNOZ Creator](#) [18]).

The rotary switch **System** can have an adhesive seal applied so that any unauthorised changes to the saved configuration will be detected. If the adhesive seal is destroyed, the configuration has been changed.

5.1 Configuration with myPNOZ Creator

The web application myPNOZ Creator enables configuration to be carried out based on a logic plan or through the combination of modules. The web application automatically assembles an individual myPNOZ based on this configuration. It selects the required modules, defines the sequence and defines the position of the rotary switches. The result is a pre-configured myPNOZ, which can be ordered directly.



NOTICE

The safety function should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

Configuration with the web application involves 3 steps:

1. Define the safety functions that you need and determine how these safety functions are linked together.
2. Open the web application myPNOZ Creator (<http://mypnoz.com/creator>) and map out the safety functions and their logic connections. Alternatively you can map out the hardware configuration.
3. When you have entered your application you can download the pre-configured myPNOZ including parts list as a PDF file or place an order directly via the web application / E-Shop.

Once you've ordered you'll receive a fully configured and tested myPNOZ, which you can wire and install and then put into service directly. There is a QR code on the left-hand side of the head module so that you can change or re-order the configuration at a later date. The QR code leads you directly to your configuration in the myPNOZ Creator.

5.2 Change configuration

Expansion modules can be exchanged or expansion modules can be removed or added. The settings on the rotary switches can be changed. Always refer to the rules for the structure of the myPNOZ (see [Structure of myPNOZ](#) [13]).

Procedure:

1. Set the rotary switch **System** on the head module to **Conf**. All the outputs are switched off.

2. You can now make the following changes:
 - Exchange expansion modules or insert new expansion modules ([Remove/change modules](#)  31])
 - Change or reset the start type ([Set start type and test pulse evaluation](#)  21])
 - Change or reset the delay time ([Set delay time](#)  22])
3. If you have not already done so, switch on the supply voltage.
4. Save the configuration: If the rotary switch **System** on the head module is set to **Conf**, the changed configuration will automatically be saved if no changes are made for 5 s. If the set configuration is faulty, all the module LEDs will flash orange-green and the function LEDs will indicate the reason for the faulty configuration (see [Diagnostics](#)  42). The configuration was not saved. Correct the configuration and save it again.
5. Set the rotary switch **System** to **Run** and check the safety functions.

**NOTICE**

The safety function should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

5.3

Start types

The start types determine the condition under which the state of an input circuit is forwarded as the result of the input function. The start types are set using a rotary switch (see [Set start type and test pulse evaluation](#)  21]).


The following start types are available:

- ▶ **A** Automatic start: State of the input circuit is forwarded as the result of the input function once the input circuit has been closed.
Manual start: State of the input circuit is forwarded as the result of the input function when the input circuit and start circuit are closed.
- ▶  Monitored start with rising and falling edge: State of the input circuit is forwarded as the result of the input function when the input circuit is closed and, after the waiting time has elapsed, the start circuit is closed and re-opened.
- ▶  Monitored start with rising edge: State of the input circuit is forwarded as the result of the input function when the input circuit is closed and, after the waiting time has elapsed, the start circuit is closed.
- ▶  Start with start-up test: After the supply voltage is applied, the module checks whether the input circuit is opened and then closed again (e.g. closed safety gates are opened and then closed again). Only then is the state of the input circuit forwarded as the result of the input function. After the start-up test, the start type reacts as described under "auto-matic/manual start".

The following applies to all start types: The input circuit must be deactivated at least for the duration of the recovery time (see technical details [Head module \[51\]](#) and [Expansion modules \[59\]](#)).

5.3.1 Timing diagram for automatic and manual start

- ▶ [1]: Automatic start
- ▶ [2]: Manual start
 - a: Input circuit closes before start circuit
 - b: Start circuit closes before input circuit

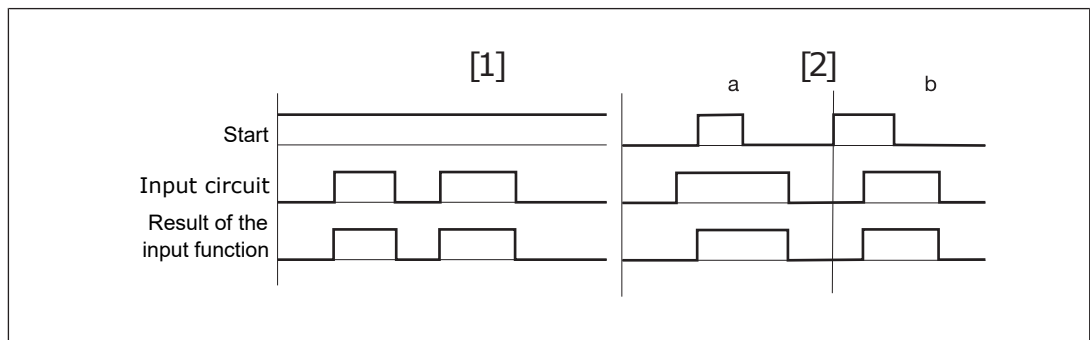


Legend

- ▶ Input circuit: State of the control or switching element on the input
- ▶ Result of the input function: Signal that is forwarded after evaluation of the start circuit and input circuit

5.3.2 Timing diagram for monitored start with rising edge

- ▶ a: Input circuit closes before start circuit
- ▶ b: Start circuit closes before input circuit

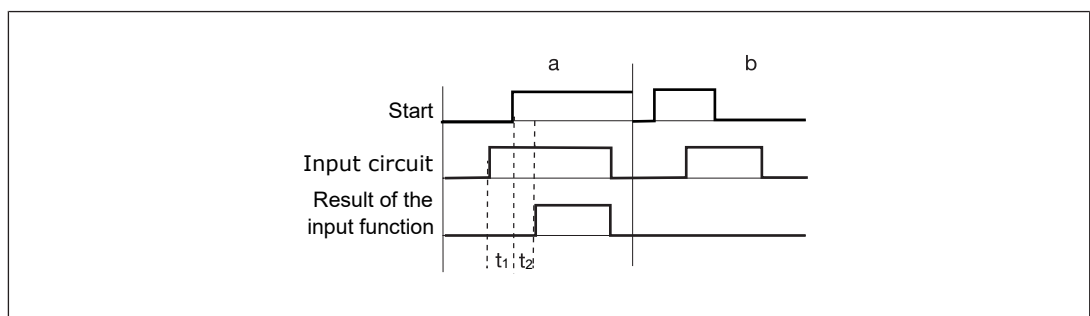


Legend

- ▶ t_1 : Waiting time on monitored start (see module's technical details)
- ▶ t_2 : Start pulse duration on monitored start (see module's technical details)
- ▶ Input circuit: State of the control or switching element on the input
- ▶ Result of the input function: Signal that is forwarded after evaluation of the start circuit and input circuit

5.3.3 Timing diagram for monitored start with rising and falling edge


- ▶ a: Input circuit closes before start circuit
- ▶ b: Start circuit closes before input circuit

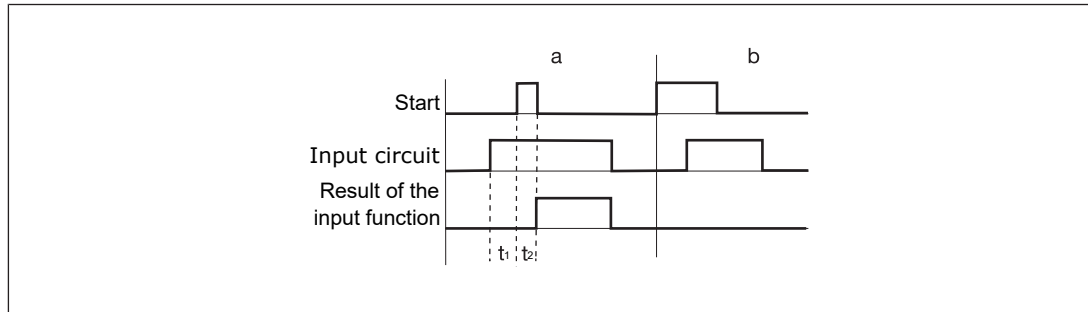

Legend

- ▶ t_1 : Waiting time on monitored start (see module's technical details)
- ▶ t_2 : Start pulse duration on monitored start (see module's technical details)
- ▶ Input circuit: State of the control or switching element on the input
- ▶ Result of the input function: Signal that is forwarded after evaluation of the start circuit and input circuit

5.3.4 Timing diagram for start with start-up test

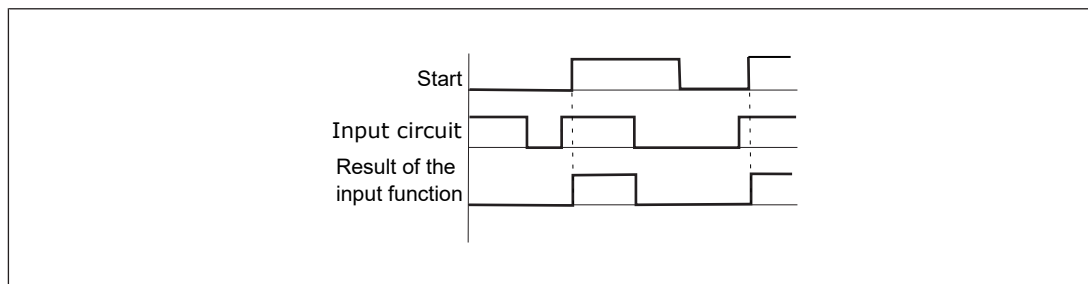

Legend

- ▶ Input circuit: State of the control or switching element on the input
- ▶ Result of the input function: Signal that is forwarded after evaluation of the start circuit and input circuit

5.4 Set start type and test pulse evaluation

The start type is set on the rotary switch **mode** of the head module or expansion module. The setting options are explained under [Start types](#) [19].

Procedure:

- ▶ If you wish to change the start type of a configured myPNOZ that is already in operation, first set the rotary switch **System** on the head module to **Conf**.
- ▶ Use the rotary switch **mode** to set the required start type.

Rotary switch mode	Automatic or manual start	Monitored start, rising edge	Monitored start, rising and falling edge	Automatic start with start-up test edge
Without test pulse evaluation				
With test pulse evaluation				

- ▶ Save the setting: If the rotary switch **System** is set to **Conf**, the changed setting will automatically be saved if no changes are made for 5 s.
- ▶ myPNOZ can be restarted. To do this, set the rotary switch **System** to **Run**.

5.5

Delay times

The safe outputs on some expansion modules (see [Structure of myPNOZ](#)  14)) can be switched on or off with a delay. The delay time is set via 2 rotary switches:

- ▶ The rotary switch **t[s]** is used to set a time value.
- ▶ The rotary switch **n** is used to set a factor, which is multiplied by the time value; select between an on delay or an off delay.
- ▶ For selectable delay times see [Set delay time](#)  22]



INFORMATION

The overall time required to switch an output results from:
Reaction time ([Reaction times](#)  25]) + delay time + 1.5 % tolerance of the delay time



INFORMATION

The delay time during switch-off cannot be guaranteed, as in case of an error there is an instantaneous switch-off.

5.6

Set delay time

The delay time of the safe outputs is set using the rotary switches **t[s]** and **n** on the expansion module. The delay time is the result of multiplying the set time value **t[s]** by the set factor **n**.

The rotary switch **n** is also used to select between an on delay (t_{on} range) and an off delay (t_{off} range).

Procedure:

- ▶ If you wish to change the delay type of a configured myPNOZ that is already in operation, first set the rotary switch **System** on the head module to **Conf**.

- Use the rotary switch **t[s]** to set the required time value.
- Use the rotary switch **n** to set the required factor and select between an on delay or an off delay.
- Save the setting: If the rotary switch **System** is set to **Conf**, the setting will automatically be saved if no changes are made for 5 s.
- myPNOZ can be restarted. To do this, set the rotary switch **System** to **Run**.

Examples:

- Required off delay: 20 s

– Settings:

$$t[s] = 2.5 \text{ s},$$

$$n = 8 (t_{\text{off}})$$



– Calculation of delay time = 2.5 s x 8 = 20 s

- Required on delay: 6 s

– Settings:

$$t[s] = 1.2 \text{ s},$$

$$n = 5 (t_{\text{on}})$$



– Calculation of delay time = 1.2 s x 5 = 6 s

Selectable delay times:

Off delay t_{off} [seconds]

Time t[s]	Factor n						
	1	2	3	5	8	12	20
0	0 s	0 s	0 s	0 s	0 s	0 s	0 s
0.05	0.05 s	0.1 s	0.15 s	0.25 s	0.4 s	0.6 s	1 s
0.12	0.12 s	0.24 s	0.36 s	0.6 s	0.96 s	1.44 s	2.4 s
0.25	0.25 s	0.5 s	0.75 s	1.25 s	2 s	3 s	5 s
0.5	0.5 s	1 s	1.5 s	2.5 s	4 s	6 s	10 s
1.2	1.2 s	2.4 s	3.6 s	6 s	9.6 s	14.4 s	24 s
2.5	2.5 s	5 s	7.5 s	12.5 s	20 s	30 s	50 s
5	5 s	10 s	15 s	25 s	40 s	60 s	100 s
15	15 s	30 s	45 s	75 s	120 s	180 s	300 s

On delay t_{on} [seconds]

Time t[s]	Factor n	
	5	12
0	0 s	0 s
0.05	0.25 s	0.6 s
0.12	0.6 s	1.44 s
0.25	1.25 s	3 s
0.5	2.5 s	6 s
1.2	6 s	14.4 s
2.5	12.5 s	30 s
5	25 s	60 s
15	75 s	180 s

6 Reaction times

If the state at an input is changed, e.g. an E-STOP pushbutton is operated, it takes a certain time for the signal to arrive at the output and the output to switch. This time is the reaction time. The reaction time is due to internal processing times and delay times caused by the components. Different reaction times occur, depending on the type of the output and the state change at the input. The number of modules also influences the reaction time.

Reaction time of a safe relay output

The time needed for a relay output to switch off or on when the state at the input changes

Number of expansion modules	Max. reaction time when switching off	Max. reaction time when switching off in the event of an internal error	Typ. reaction time when switching off	Max. reaction time when switching on
1	32.5 ms	37.6 ms	9.8 ms	57 ms
2	32.5 ms	37.6 ms	9.8 ms	57 ms
3	32.5 ms	37.6 ms	9.8 ms	57 ms
4	32.5 ms	37.6 ms	9.8 ms	57 ms
5	33.1 ms	38.2 ms	10.2 ms	58.5 ms
6	33.5 ms	38.6 ms	10.5 ms	59.5 ms
7	34 ms	39 ms	10.8 ms	60.5 ms
8	34.4 ms	39.4 ms	11.1 ms	61.6 ms

Reaction time of a safe semiconductor output

The time needed for a semiconductor output to switch off or on when the state at the input changes

Number of expansion modules	Max. reaction time when switching off	Max. reaction time when switching off in the event of an internal error	Typ. reaction time when switching off	Max. reaction time when switching on
1	6.1 ms	14.3 ms	3.8 ms	34.3 ms
2	6.1 ms	14.3 ms	3.8 ms	34.3 ms
3	6.1 ms	14.3 ms	3.8 ms	34.3 ms
4	6.1 ms	14.3 ms	3.8 ms	34.3 ms
5	6.8 ms	14.9 ms	4.3 ms	35.8 ms
6	7.2 ms	15.3 ms	4.6 ms	36.8 ms
7	7.6 ms	15.7 ms	4.9 ms	37.8 ms
8	8 ms	16.1 ms	5.2 ms	38.8 ms

Reaction time of a signal output (not safety-related)

The time needed for a signal output to switch off or on when the state at the input changes

Number of expansion modules	Max. reaction time when switching off	Typ. reaction time when switching off	Max. reaction time when switching on
1	7.2 ms	4,3 ms	32.6 ms
2	7.2 ms	4,3 ms	32.6 ms
3	7.2 ms	4,3 ms	32.6 ms
4	7.2 ms	4,3 ms	32.6 ms
5	7.8 ms	4,7 ms	34.2 ms
6	8.2 ms	5 ms	35.2 ms
7	8.6 ms	5,3 ms	36.2 ms
8	9 ms	5,6 ms	37.2 ms


7 Consideration of the safety-related characteristic data


The safety-related characteristic values of the input, logic and output must always be taken into account for calculating the safety-related characteristic data of a safety function on the myPNOZ. The safety-related characteristic data of the connected sensors and actuators must also be taken into account. They are not considered here, as they depend on the respective application.

- ▶ All inputs of the same type have identical safety-related characteristic data.
- ▶ All outputs of the same type have identical safety-related characteristic data.
- ▶ The head module specifies the safety-related characteristic data of the logic.
- ▶ The input on the head module is evaluated as any other input of the same type.
- ▶ Each safety function is considered separately.
- ▶ A module's position has no influence on the safety-related characteristic data

Examples:

The safety level of a safety function on the myPNOZ is always the result of the values for input + logic + output, irrespective of the position of the modules. If all the inputs and outputs shown in the examples were of the same type, then the safety level of the safety function for all examples would also be identical.

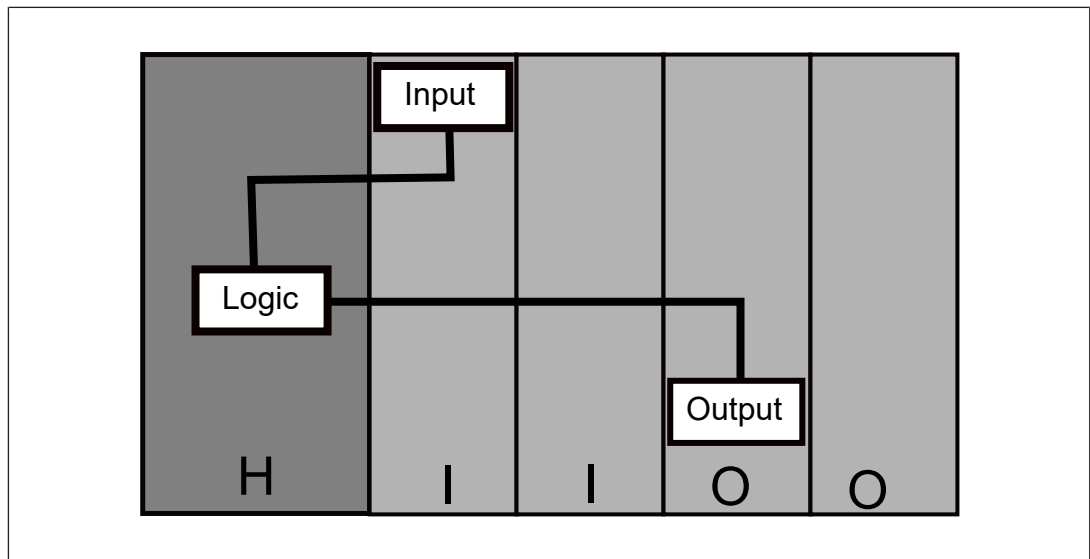

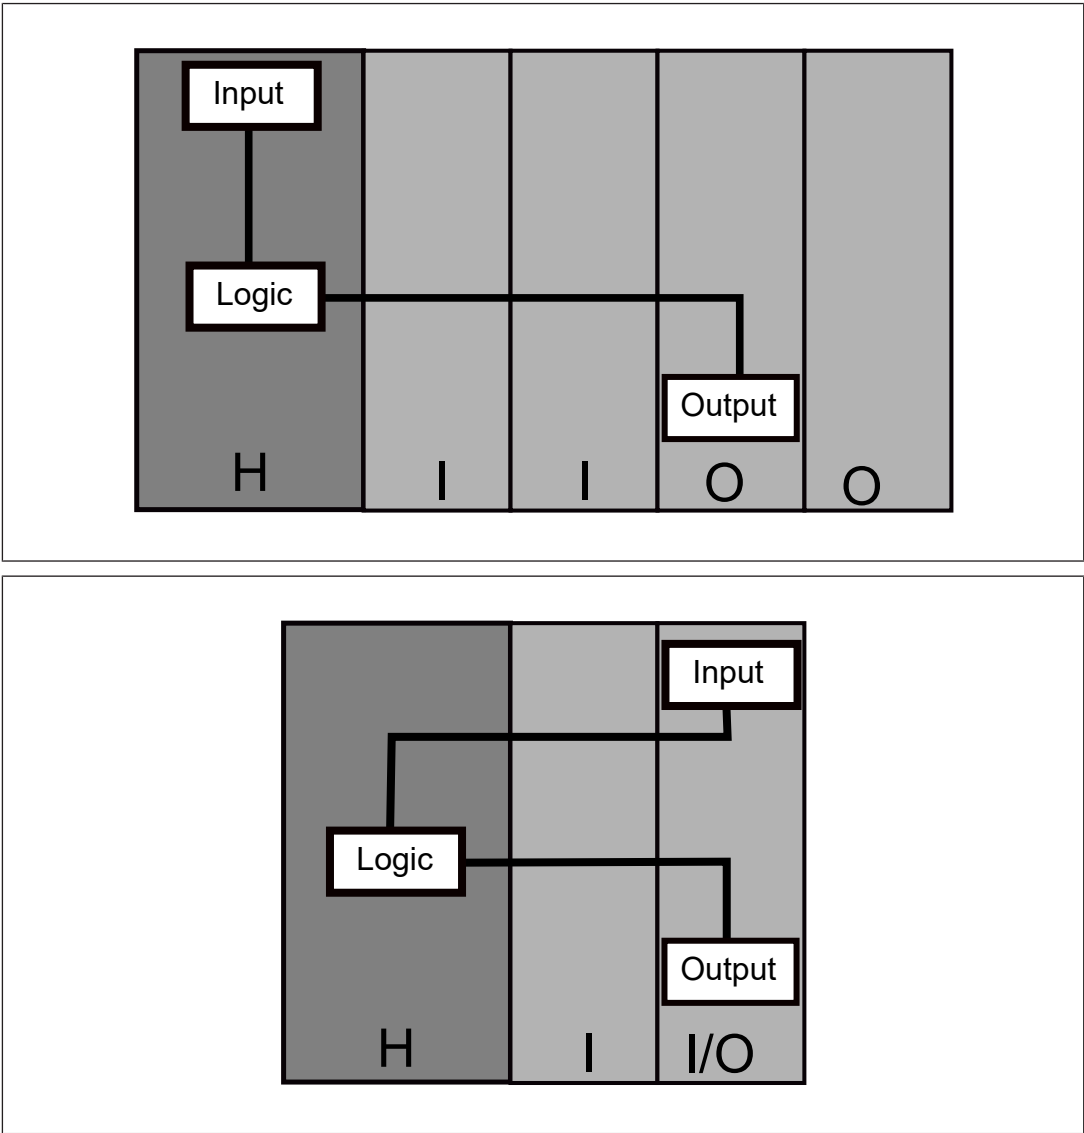

8 Installation and removal

To install a myPNOZ, first connect the modules together (see [Connect modules](#)  30]). myPNOZ can then be installed on the mounting rail in the control cabinet (see [Install myPNOZ on the mounting rail](#)  31]). Please note the dimensions.

If a myPNOZ is already installed on the mounting rail, individual modules can be removed, exchanged or added without removing the remaining modules (see [Remove/exchange modules](#)  31]).

The position of the expansion modules arranged to the right of the head module determines the logic connection of the inputs and the switching of the outputs (see [Application logic](#)  17]).

Please refer to the section entitled [Structure of myPNOZ](#)  13] for details of the number of modules and module types that can be connected.

During installation and removal please note:



CAUTION!

Only install modules when the supply voltage is switched off.



NOTICE

Damage due to electrostatic discharge!

Electrostatic discharge can damage components. Ensure against discharge before touching the product, e.g. by touching an earthed, conductive surface or by wearing an earthed armband.

8.1 Connect modules

Prerequisites


- The plug-in terminals on the modules are removed (see [Remove plug-in terminals](#) [32]).

Procedure

- From above, push the module to be connected into the rail of the adjacent left-hand module.



- Connect the modules using the bus connectors provided.

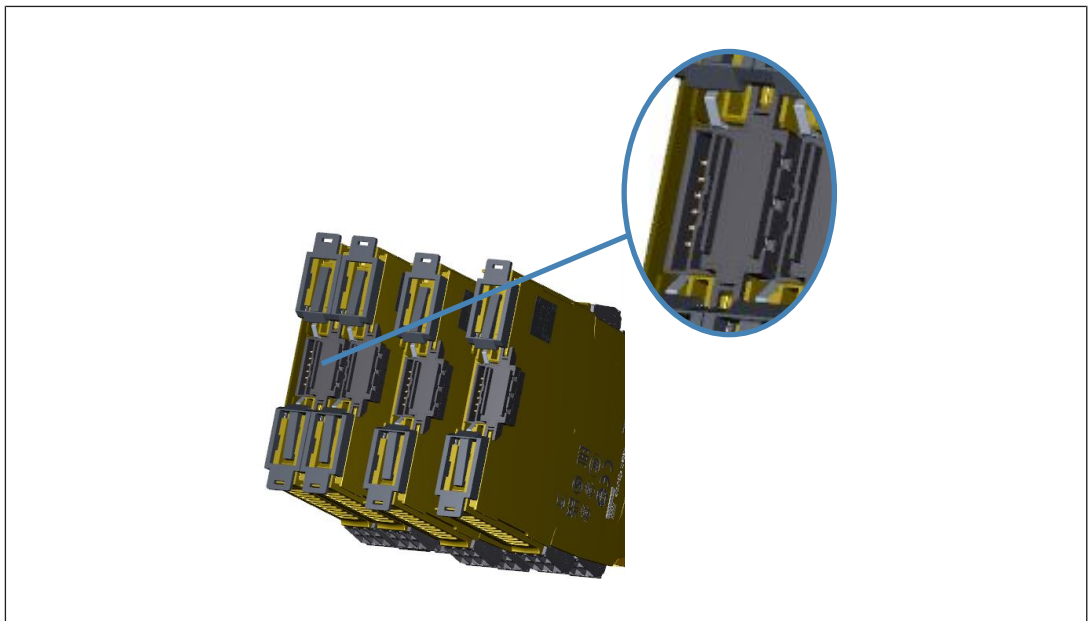


8.2 Install myPNOZ on the mounting rail

Prerequisites

- ▶ Modules are connected.
- ▶ The control cabinet must be at least protection type IP54.

Procedure

- ▶ Open the locking slides on the back of the modules

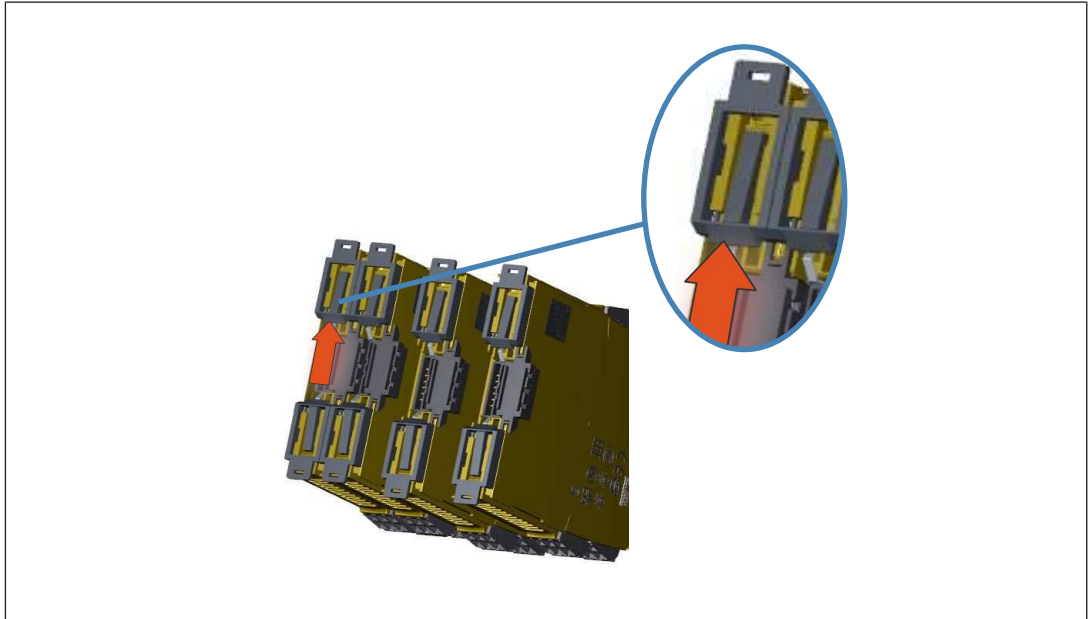

- ▶ Place the modules on the mounting rail and attach them to the mounting rail using the locking slides.
- ▶ Install fixing element
When installed vertically or in environments exposed to heavy vibration, myPNOZ should be secured using a fixing element (e.g. retaining bracket or end angle).

8.3 Remove/exchange modules

You can remove or exchange the complete myPNOZ or individual modules.

Prerequisites

- ▶ Plug-in terminals must be removed (see [Remove plug-in terminals](#) [ 32])
 - on the module that is to be removed
 - on the adjacent left-hand module

Procedure

- ▶ Open the locking slides on the back of the modules to be removed.
- ▶ Lift the module from the mounting rail.

8.4 Remove plug-in terminals

Procedure: Insert the screwdriver into the housing recess behind the terminal and lever the terminal out.

Do **not** remove the terminals by pulling the cables!




8.5 Mounting distances

With control cabinet installation it is essential to maintain a certain distance from the top and bottom, as well as to other heat-producing devices (see diagram). The values stated for the mounting distances are minimum specifications.

The ambient temperature in the control cabinet must not exceed the figure stated in the technical details. Air conditioning may otherwise be required.

Mounting distances:

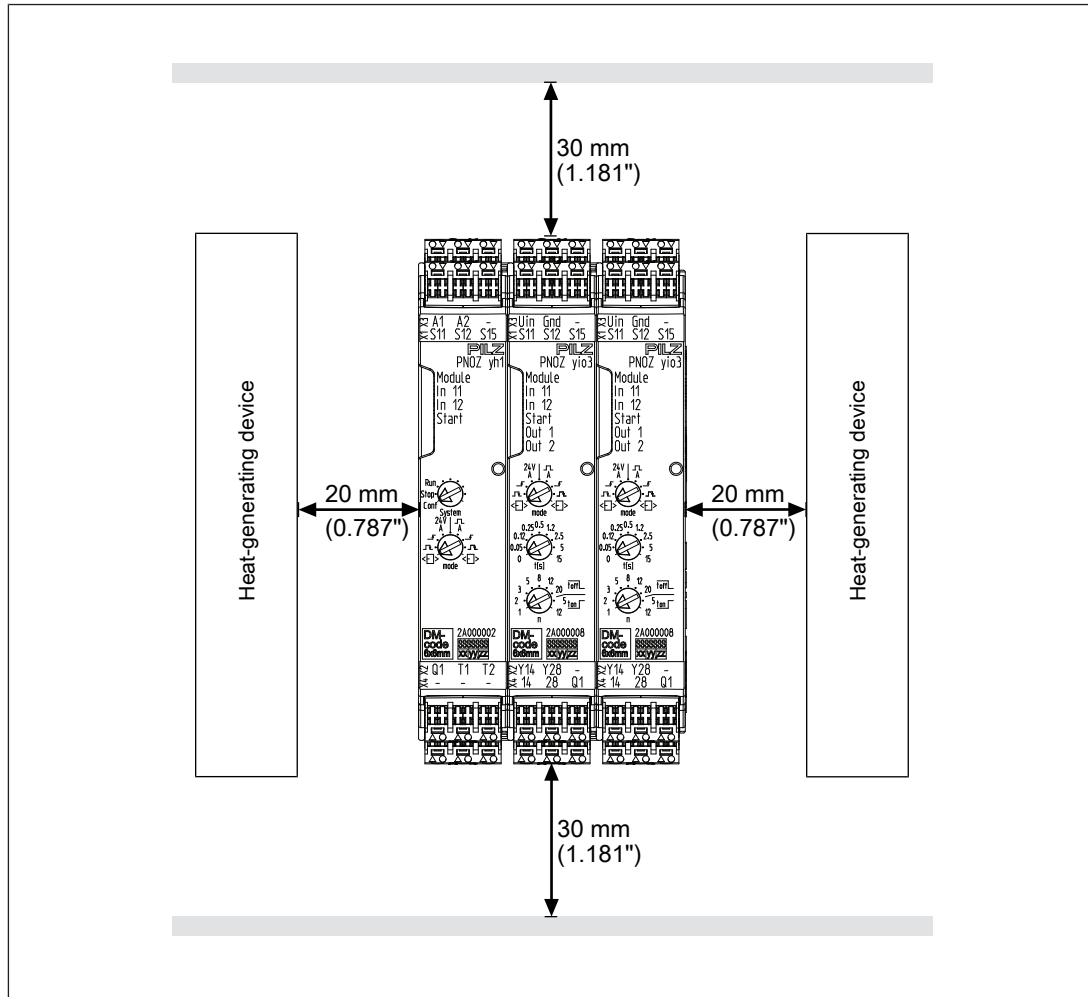

9

Wiring

The function and description of inputs and outputs of the same type are identical on all modules. Any special features are described with the individual connections. The technical properties can be found with the respective modules (see [Head modules](#) [51] and [Expansion modules](#) [59])

Please note:

- ▶ It is essential to comply with the modules' technical details.
- ▶ Test pulse outputs must exclusively be used to test the inputs. They must not be used to drive loads.

**NOTICE**

Do not route the test pulse cables together with actuator cables within an unprotected sheathed cable.

- ▶ To prevent EMC interferences (particularly common-mode interferences) the measures described in EN 60204-1 must be executed. This includes the separate routing of cables of the control circuits (input, start and feedback loop) from other cables for energy transmission or the shielding of cables, for example.
- ▶ Use copper wiring with a temperature stability of 60/75 °C.
- ▶ Use ferrules to connect multicore cables.

9.1


Connect the supply voltage

The head module and the expansion modules with safe semiconductor outputs can be supplied via one or more power supplies.

Please note when selecting the power supply:

- ▶ The power supply must meet the regulations for extra low voltages with protective electrical separation (SELV, PELV).
- ▶ Output of external power supply: to calculate the total output of the external power supply, add the information from the technical details for the head module and connected expansion modules.

Procedure:

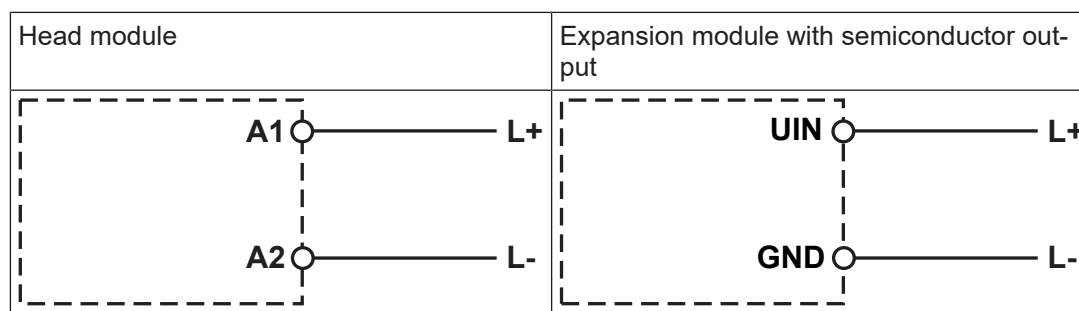

**NOTICE**

If the head module and the expansion module are supplied from different power supplies, then the A2 connection and GND on the myPNOZ must be connected.

9.2 Connect control or switching elements to the inputs

The control or switching elements trigger the switching of the outputs. The wiring of the control and switching elements is based on the application and required safety level.

Please note

- Connect test pulse outputs to the control or switching elements in order to detect shorts across contacts.
- Only use the control and switching elements that are intended for the respective module (see [Head modules](#) [51] and [Expansion modules](#) [59])

Prerequisites:

- You have carried out a risk analysis, determined the safety level and defined the conditions for the wiring (e.g. detection of shorts across contacts required, 1-ch. or 2-ch.)

Procedure:

Control/switching element	Single-channel	Dual-channel
E-STOP without test pulse evaluation		
E-STOP with test pulse evaluation ► Head module ► Head module and expansion module		
Safety gate switch without test pulse evaluation		

Safety gate switch with test pulse evaluation ▶ Head module ▶ Head module and expansion module		
ESPE, test pulse evaluation through ESPE (OSSD)		
Two-hand type III A		
Two-hand type III C		

Legend

- ▶ S1/S2: E-STOP / safety gate switch, light curtain or two-hand pushbutton
- ▶ $\Uparrow$: Operated element
- ▶ : Gate open
- ▶ : Gate closed



9.3 Connect start button

A start button prevents a module from restarting automatically. The start type is defined using the operating mode selector switch **mode**.

Prerequisites:

- ▶ You have carried out a risk analysis, determined the safety level and defined the conditions for the wiring (e.g. start-up test required).

Procedure:

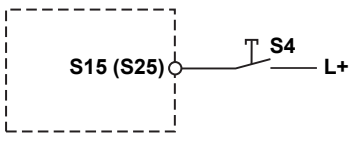Start type	Automatic/automatic with start-up test	Manual/monitored
		

Legend

- ▶ S4: Start button

9.4 Wire outputs

The wiring of the relay outputs and semiconductor outputs can be single or redundant.

Please note

- ▶ Protect the relay outputs from short circuit with an external blow-out fuse.
- ▶ To monitor external contactors and relays, a module's instantaneous and delayed outputs can be connected to feedback loops (see [Connect feedback loop](#) [38]).



NOTICE

If you wish to achieve SIL CL3 of EN 62061, PL e of EN ISO 13849 with a semiconductor output, you will need to use appropriate wiring to exclude shorts across contacts. The connected actuators must have a guaranteed dropout voltage of at least 2.4 V or actuators must be used that are certified to EN60947-4-1 with at least 24 V rated voltage.

2 loads (e.g. contactor, relay) may be connected to an output for SIL CL 3/ PL e applications under the following conditions:

- Short across contact and external supply are excluded (e.g. through separate sheathed cables).

Please note that, in the event of an error on the connected loads or in the feedback loop, myPNOZ switches to a safe state and shuts down all the outputs.

- ▶ Sufficient fuse protection must be provided on all outputs with capacitive and inductive loads.

- Do **not** use signal output Q1 for safe circuits. The signal output reacts like the safe output and can be used for display, for example.

Prerequisites:

- You have carried out a risk analysis, determined the safety level and defined the conditions for the wiring.

Procedure:

Outputs	Single	Redundant
Relay outputs (example wiring of 17-27 and 18-28)		
Semiconductor outputs		

Legend

- K1/K2/K3/K4: Relay or contactor

9.5 Connect feedback loop

The feedback loops are used to monitor external contactors or relays. The N/C contacts incorporated into the feedback loop must be closed before starting. If the N/C contact is open, the connected plant or machine cannot be restarted.

Please note

- If feedback loop monitoring is not required, the feedback loop inputs must be connected to 24 VDC.
- On modules with multiple feedback loops, the assignment of the outputs to the feedback loops can be recognised by the name: the name of the feedback loop starts with a "Y", followed by the two digits of the assigned output.

Prerequisites:

- You have carried out a risk analysis, determined the safety level and defined the conditions for the wiring.

Procedure:

Feedback loop	Active	Inactive
Relay outputs		
Semiconductor outputs		

Legend

- K1/K2: Relay or contactor with N/C contacts

10 Commissioning

Prerequisites:

- ▶ myPNOZ is configured and the configuration has been saved.
- ▶ myPNOZ is installed and wired correctly.

Procedure:

1. Switch on the supply voltage.
2. Move the rotary switch **System** to the **Run** position.

myPNOZ runs through an initialisation phase. It carried out self checks, establishes the connection between the modules and tests the configuration. The **Module** LED on the head module flashes green. Once initialisation is completed successfully, myPNOZ goes into operation and switches all the outputs in accordance with the configured logic. The **Module** LEDs light up green. Potential status and error messages can be found under [Diagnostics](#) [ 42].



NOTICE

The safety function should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

11 Operation

In operation, myPNOZ checks the input states cyclically and switches the outputs in accordance with the configured logic. The **Module** LEDs light up green. The meaning of all the LEDs can be found under [Diagnostics](#) [42].

If there is an error, such as increased temperature or a low supply voltage for example, the **Module** LED lights up orange instead of green. The colour change from green to orange is a warning. myPNOZ remains operational. Only if there is an inadmissible deviation of temperature or supply voltage is an error triggered and all the outputs switched off.

myPNOZ may be in one of the following states:

- ▶ Initialisation: After supply voltage is switched on, myPNOZ runs through an initialisation phase.
- ▶ RUN: Normal operation, all outputs react to the states of the inputs in accordance with the saved configuration. The rotary switch **System** is in the **Run** position.
- ▶ STOP: The states at the inputs are not processed, all safe outputs are switched off. This state occurs when errors in the Error category or configuration errors occur or when the rotary switch **System** is no longer in the **Run** position. Errors in the Error category cannot be rectified (see [Error messages](#) [49]). In the event of a configuration error, set the rotary switch **System** to the **Stop** position and rectify the error. To return to a RUN state, the rotary switch **System** must be set to **Run** or the supply voltage switched off and on again.



NOTICE

The safety function should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

12 Diagnostics

The LEDs on the head module and expansion modules indicate the status of the modules and report on operating states as well as external and internal errors. The **Module** LED indicates the status of the module; the function LEDs (In, Out, Start) indicate the status of the inputs and outputs.

Legend

- LED off
- ☀ LED on
- ⚡ LED flashes in one colour (500 ms on, 500 ms off)
- ⚡ LED flashes in two colours (500 ms in colour 1, 500 ms in colour 2)
- ⚡ LED flashes inversely in one colour (LED 1: 500 ms off, 500 ms on, LED 2: 500 ms on, 500 ms off)
- ⚡ LED flashes quickly (50 ms on, 950 ms off)

12.1 Status messages

These messages provide information about the status of the myPNOZ and the inputs/outputs.

Status messages during initialisation

After the myPNOZ is started there is a brief initialisation phase.

Module LED	Function LED	Meaning
 Quickly flashes green	 All LEDs off	Initialisation

Status messages during operation (RUN)

During operation, where there are no errors present, the states of the inputs and outputs are displayed. The Module LED light up green. If the colour of the Module LED turns orange, this is a warning about one of the following errors:

- ▶ Supply voltage increased or low
- ▶ Supply voltage to semiconductor outputs increased or low
- ▶ Temperature increased or low
- ▶ Connection between modules disturbed by external influences

myPNOZ only switches to an error state when the error means that a limit value is exceeded. If the error is no longer present, the Module LED switches back to green.

Module LED	Function LED	Meaning
 Lights up green (or-ange)	 Input LED lights up green	Input active
	 Input LED off	Input inactive
	 Input LED flashes green (both)	Both LEDs flash alternately: ▶ Only one input was operated (partial operation) ▶ Only one input was deactivated ▶ With two-hand control: simultaneity not maintained ▶ Two-hand operated, however start conditions are not met (e.g. E-STOP pushbutton operated or switch-off delay active)
	 Start LED lights up green	Start input active
	 Start LED off	Start input inactive
	 Start LED flashes green	▶ Application can be started, waiting for start signal ▶ When starting with start-up test: Start-up test not performed yet
	 Output LED lights up green	Output active
	 Output LED off	Output inactive

Status indicator in STOP state

If myPNOZ is in a STOP state, the states of the inputs and outputs are displayed. All the module LEDs in one zone flash identically. The module LEDs in the following zone flash inversely.

If an error occurs, the module LED switches its colour from green to orange. Errors may be:

- ▶ Supply voltage increased or low
- ▶ Supply voltage to semiconductor outputs increased or low

- Temperature increased or low

If the error is no longer present, the LED switches back to green. If the error means that a limit value is exceeded, myPNOZ switches to an error state.

Module LED	Function LED	Meaning
 Flashes green (orange)	 Input LED lights up green	Input active
	 Input LED off	Input inactive
	 Start LED lights up green	Start input active
	 Start LED off	Start input inactive
	 Output LED lights up green	Output active (delay time not yet elapsed)
	 Output LED off	Output inactive

12.2 Error messages

The Module LED on the affected module displays various types of error messages. The function LEDs provide additional information about the cause of the error. If an error occurs on the head module, then all modules are affected by the error. If the error occurs on an expansion module, then only the zone to which the expansion module belongs is affected.

“Error” error messages

“Error” type error messages are mostly wiring errors or errors based on a failure to comply with the technical details. In the event of this type of error

- All safe outputs are switched off within the reaction time
- All delayed safe outputs are switched off once the delay time has elapsed
- The safe outputs that are affected by the error are switched off immediately
- All signal outputs are switched off within the reaction time

Once the error has been rectified, the rotary switch **System** must be set first to **Stop** and then to **Run** or the supply voltage must be switched off and on again.

Module LED	Function LED	Meaning	Remedy
 Flashes red	 All LEDs off	LED on the head module flashes red: – Supply voltage on the head module > 28.8V – Supply voltage on the head module < 19.2V – Rotary switch System in invalid intermediate position LED flashes red: – Temperature too high or too low	Keep within the permitted supply voltage range (see module's technical details) Correct the position of the rotary switch Keep within the temperature range (see module's technical details)
 Flashes red	 Input LED lights up green	Input active	
 Flashes red	 Input LED off	Input inactive	
 Flashes red	 Input1 LED flashes green	Test pulse T1 not detected at the input	Check the test pulse wiring for short circuits to 24 VDC and to other test pulses; rectify error
 Flashes red	 Input2 LED flashes green	Test pulse T2 not detected at the input	Check the test pulse wiring for short circuits to 24 VDC and to other test pulses; rectify error
 Flashes red	 Start LED lights up green	Start input is active	
 Flashes red	 Start LED off	Start input inactive	

Module LED	Function LED	Meaning	Remedy
 Flashes red	 Output LED lights up green	Output active (delay time not yet elapsed)	
 Flashes red	 Output LED off	Output inactive	
 Flashes red	 Output LED flashes green	Error at the output ► Output LED flashes (or both LEDs flash simultaneously) – Feedback loop is not closed when starting or attempting to switch on – Output is switched off, but there is still voltage at the output ► Both LEDs flash alternately – Total current at the semiconductor outputs of an I/O module too high – Supply voltage at the semiconductor output of an I/O module too high – Total current at the semiconductor outputs of an I/O module briefly very high – Short circuit between two semiconductor outputs on a module – Short circuit between semiconductor output and GND	– Check wiring of feedback loop, rectify error – Check wiring of output for short circuits, rectify error – Keep within the permitted supply voltage range (see module's technical details) – Rectify short circuit – Rectify short circuit

Configuration error messages

myPNOZ regularly checks the configuration. If any deviation from the saved configuration is established, myPNOZ signals a configuration error. Configuration errors generally arise due to an unsaved configuration. For example, the position of a rotary switch was changed, but the configuration was not saved afterwards. In the event of this type of error

- All safe outputs are switched off
- All signal outputs are switched off

Once a configuration error has been rectified, the configuration must be re-saved and then the rotary switch **System** set to **Run** (see [Change configuration](#) [18]). If the position of a rotary switch was changed accidentally, the position of the rotary switch must be corrected. It is not necessary to save the configuration again.

Module LED	Function LED	Meaning	Remedy
 Flashing orange green	 All LEDs off	When the configuration is saved: – Module saved in the configuration, but not available Saving of the current configuration failed	– Check that all modules are inserted in the right sequence – Check whether modules are indicating a communication error (Module LED flashes red-orange) – If the required configuration is set, save this configuration Save configuration
 Flashing orange green	 All LEDs on a module are quickly flashing green	When the configuration is saved: – Module type does not match the saved configuration – More modules than saved in the configuration When saving of the current configuration has failed: – Last module without output – Head module does not recognise the module type of the expansion module – More than eight expansion modules – Firmware version of head module and expansion module not compatible	– Check that all modules are inserted in the right sequence – Set the required configuration and save it – Check if there is a module with an output at the last position – Check whether modules are indicating a communication error (Module LED flashes red-orange) – Check whether there are more than eight expansion modules – Check the compatibility of the firmware versions (see data sheets)

Module LED	Function LED	Meaning	Remedy
 Flashing orange green	 A module's input LEDs are flashing green (both)	Configuration error at the input When the configuration is saved: - Position of the rotary switch mode does not match the saved configuration When saving of the current configuration has failed: - The rotary switch mode position is in an invalid intermediate position	Check the position of the rotary switch, configure the position and save the configuration Check the position of the rotary switch and correct the position
 Flashing orange green	 Output LED on a module is flashing green	Configuration error at the output: - Position of the rotary switch n does not match the saved configuration - Position of the rotary switch t[s] does not match the saved configuration When saving of the current configuration has failed: - Rotary switch n or t[s] is in an intermediate position, which is not permitted	Check the position of the rotary switches, configure the position and save the configuration Check the position of the rotary switch and correct the position

“Internal error” error message

If this error occurs

- ▶ All safe outputs are switched off
- ▶ All signal outputs are switched off
- ▶ Communication is interrupted and subsequent modules indicate a communication error

This error cannot be rectified. Please exchange the affected module or contact Pilz.

Module LED	Function LED	Meaning	Remedy
 Lights up red	 All LEDs off	Internal error	Exchange module or contact Pilz

Communication error message

Communication errors occur when communication between the head module and expansion module is disrupted. In the event of this type of error

- ▶ All safe outputs are switched off

- All signal outputs are switched off

Once the connection is stable again and no further errors are present, myPNOZ switches to a STOP state. The rotary switch **System** must first be set to **Stop** and then to **Run**.

Module LED	Function LED	Meaning	Remedy
 Flashes red-orange	 All LEDs off	No connection to the head module	Check whether the bus connectors are firmly inserted between the modules

12.3 Errors on the safe outputs

- Malfunctions of the relay contacts: if the contacts have welded, reactivation will not be possible after the input circuit has opened.
- In the case of an error, the delayed outputs may open before the delay time has elapsed.

13 Maintenance and testing

It is not necessary to perform maintenance work on the product in normal operation. Please return any faulty products to Pilz.

13.1 Function test of the relay outputs

When the relay outputs are switched on, the mechanical contact on the relay cannot be tested automatically. Depending on the operational environment, measures to detect the non-opening of switching elements may be required under some circumstances.

When the product is used in accordance with the European Machinery Directive, a check must be carried out to ensure that the safety contacts on the relay outputs open correctly. Start the device again or open the safety contacts (switch off output), so that the internal diagnostics can check the correct opening of the safety contacts

- ▶ for SIL CL 3/PL e at least 1x per month
- ▶ for SIL CL 2/PL d at least 1x per year


14 Head modules

14.1 PNOZ yh1 2DI 24VDC

14.1.1 Device features

- ▶ Head module for safe applications of the myPNOZ
- ▶ Saving of the configuration
- ▶ Communication with expansion modules
- ▶ Supply voltage for myPNOZ
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ 2 test pulse outputs to detect shorts across contacts
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input


14.1.2 Front view

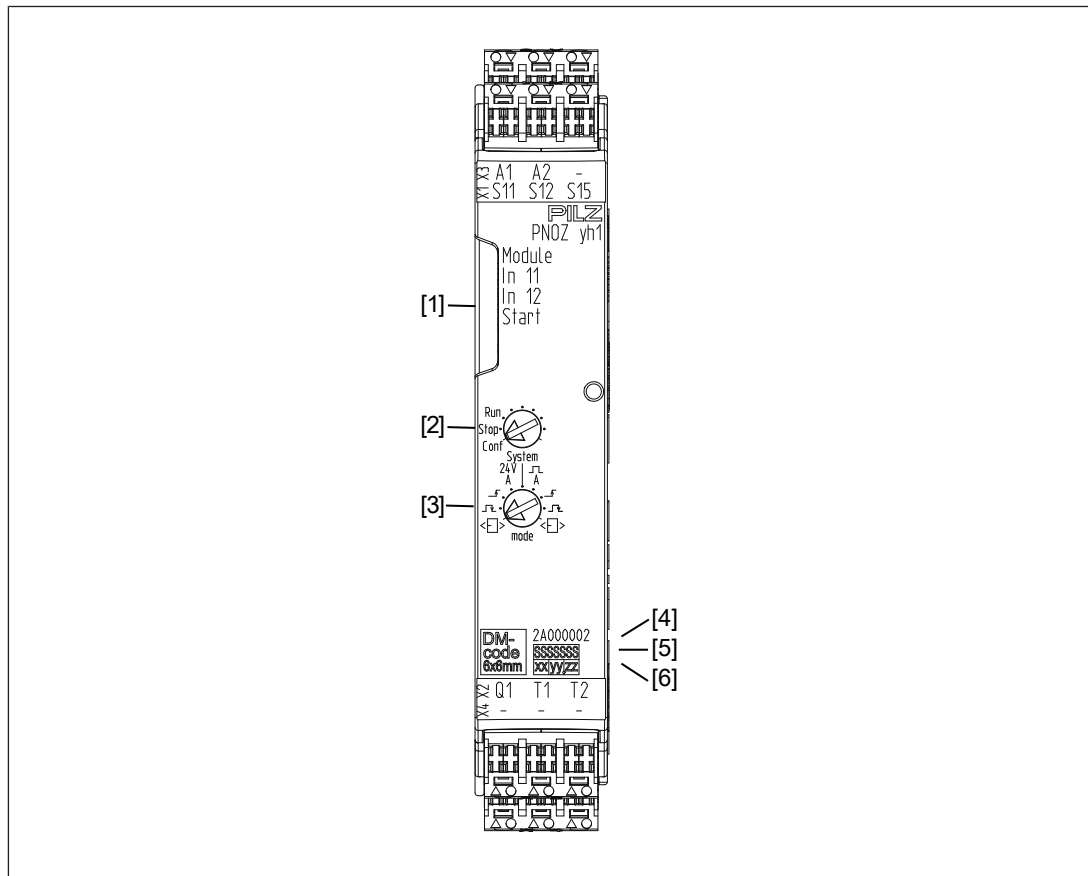


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for configuration and operating states
- [3] Rotary switch for start types and test pulse evaluation (S11, S12)
- [4] Order number
- [5] Serial number
- [6] Device version

14.1.3 Block diagram

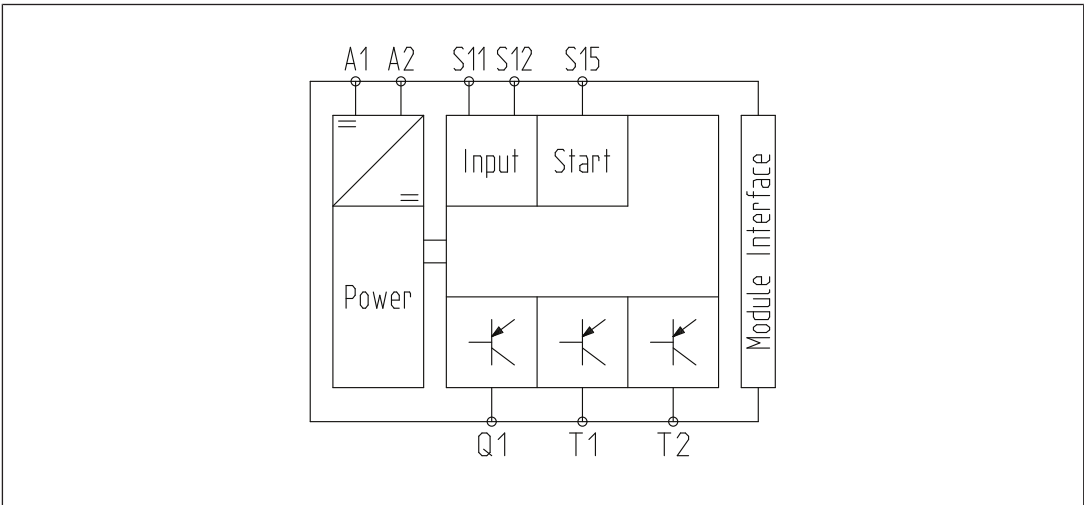

14.1.4 Dimensions

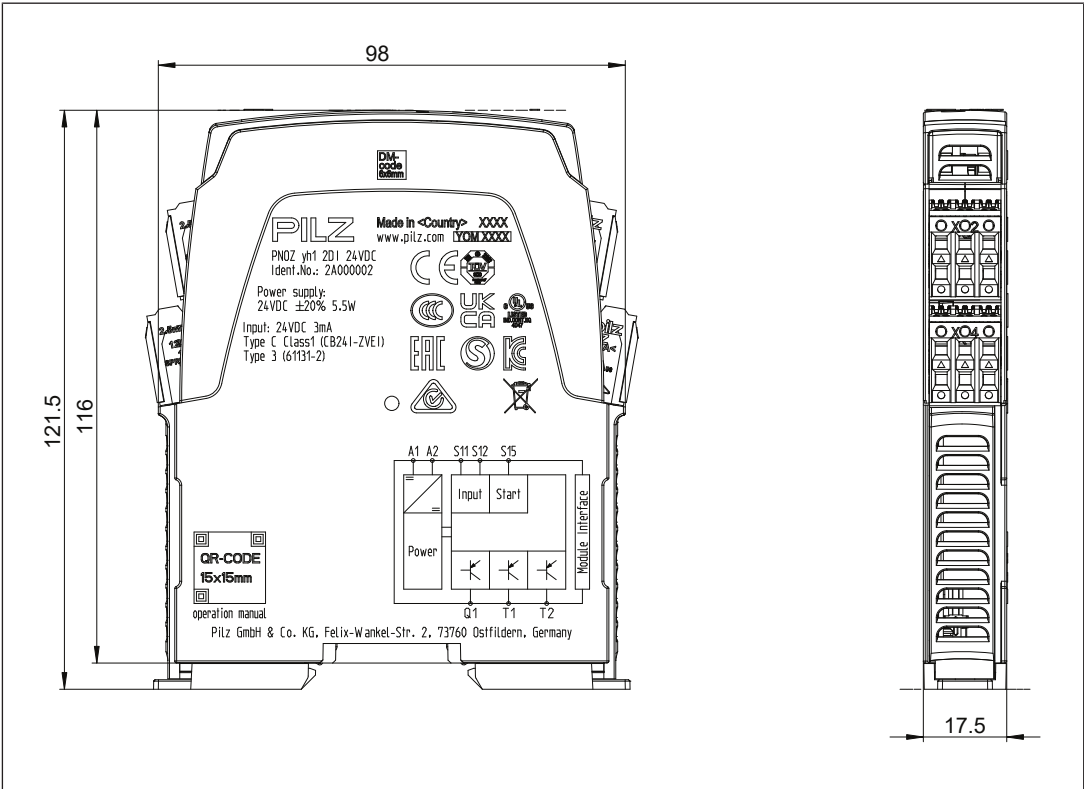

14.1.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Supply to the system
Voltage	24 V
Kind	DC
Voltage tolerance	-20 %/+20 %
Min. continuous current that the external power supply must provide	5 A
Inrush current that the external power supply must provide	3 A
Residual ripple DC	20 %
Supply voltage	
Current consumption	100 mA
Duty cycle	100 %
Status indicator	LED
Inputs	
Number	2
Number of start inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Test pulse outputs	
Number of test pulse outputs	2
Voltage	24 V
Current	0,3 A
Max. duration of off time during self test	4 ms
Short circuit-proof	yes
Potential isolation	No
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms

Times

Min. start pulse duration with a monitored start

With rising edge	100 ms
with rising and falling edge	150 ms

Max. start pulse duration with a monitored start

with rising and falling edge	2 s
------------------------------	------------

Supply interruption before de-energisation

Simultaneity, input circuit

∞

Environmental data

Ambient temperature

In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C

Storage temperature

In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C

Climatic suitability

In accordance with the standard	EN 60068-2-78
---------------------------------	----------------------

Condensation during operation

Not permitted

Max. operating height above sea level

5000 m

EMC

EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Vibration

In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm

Shock stress

In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms

Airgap creepage

In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2

Protection type

In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54

Mechanical data

Mounting position

Any

DIN rail

Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm

Mechanical data	
Max. cable length	
Max. cable length per input	1 km
Sum of individual cable lengths at the test pulse output	6 km
Material	
Bottom	PC
Top	PC
Connection type	Spring-loaded terminal, screw terminal
Mounting type	plug-in
Conductor cross section with screw terminals	
1 core flexible	0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm², 24 - 16 AWG
Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals:	
Flexible with/without crimp connector	0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	85 g

Where standards are undated, the 2021-01 latest editions shall apply.

14.1.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015	EN ISO 13849-1: 2015	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015
		PL	Category					T _M [year]

Logic								
CPU	2-channel	PL e	Cat. 4	SIL CL 3	1,51E-10	SIL 3	1,32E-05	20
Input								
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

14.1.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF

14.1.8 Order reference

14.1.8.1 Product

Product type	Features	Order no.
PNOZ yh1 2DI 24VDC	Head module, 1 input function, supply voltage connection	2A000002

14.1.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003
Adhesive seal	20 pieces	2A000200

15 Expansion modules

15.1 PNOZ yi1 4DI

15.1.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 2 input functions to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ Input functions are AND-linked
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input



NOTICE

Required firmware version of the head module: ≥ 1.0


15.1.2 Front view

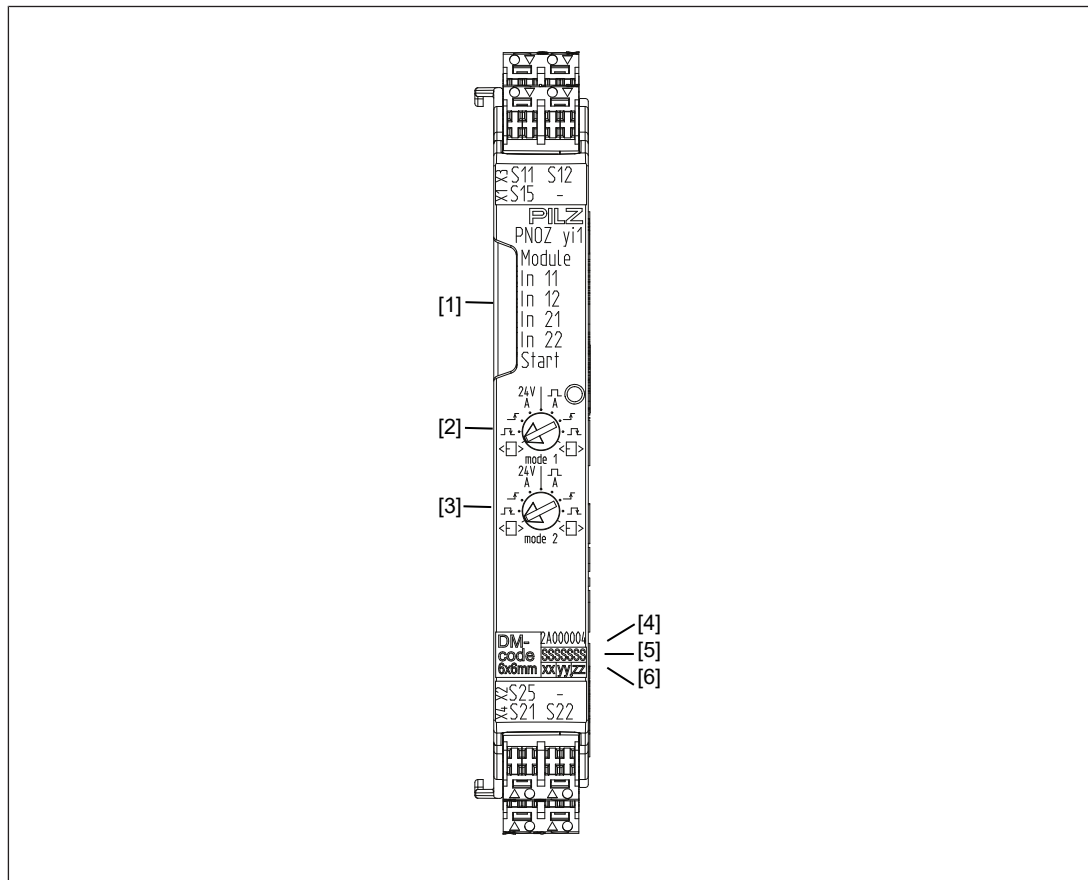


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Rotary switch for start types and test pulse evaluation (S21, S22)
- [4] Order number
- [5] Serial number
- [6] Device version

15.1.3 Block diagram

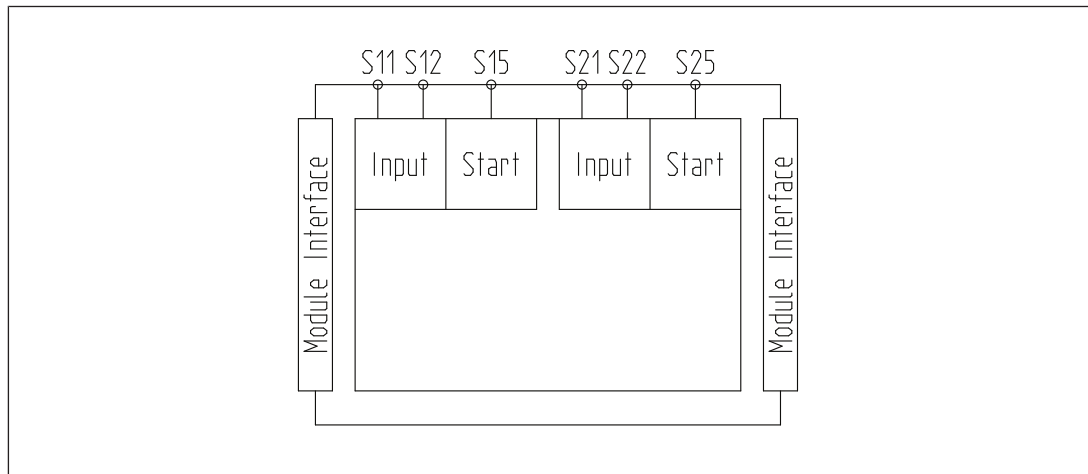

15.1.4 Dimensions

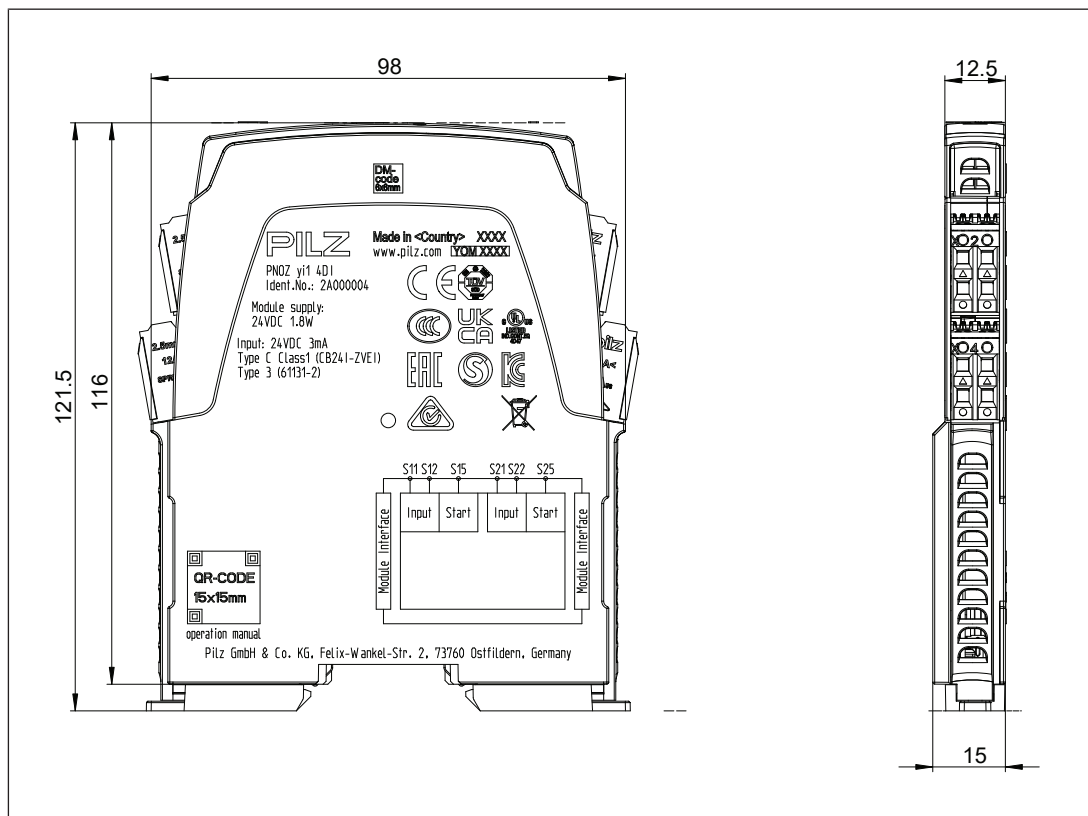

15.1.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	35 mA
Duty cycle	100 %
Status indicator	LED
Inputs	
Number	4
Number of start inputs	2
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms
Min. start pulse duration with a monitored start	
With rising edge	100 ms
with rising and falling edge	150 ms
Max. start pulse duration with a monitored start	
with rising and falling edge	2 s
Supply interruption before de-energisation	20 ms
Simultaneity, input circuit	∞
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Environmental data

Vibration

In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm

Shock stress

In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms

Airgap creepage

In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2

Protection type

In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54

Mechanical data

Mounting position	Any
-------------------	------------

DIN rail

Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm

Max. cable length

Max. cable length per input	1 km
-----------------------------	-------------

Material

Bottom	PC
Top	PC

Connection type	Spring-loaded terminal, screw terminal
-----------------	---

Mounting type	plug-in
---------------	----------------

Conductor cross section with screw terminals

1 core flexible	0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm², 24 - 16 AWG

Torque setting with screw terminals	0,5 Nm
-------------------------------------	---------------

Stripping length with screw terminals	8 mm
---------------------------------------	-------------

Conductor cross section with spring-loaded terminals:

Flexible with/without crimp connector	0,2 - 2,5 mm², 24 - 12 AWG
---------------------------------------	--

Spring-loaded terminals: Terminal points per connection

2

Stripping length with spring-loaded terminals	9 mm
---	-------------

Mechanical data

Dimensions

Height	98 mm
Width	12,5 mm
Depth	121 mm

Weight	77 g
--------	------

Where standards are undated, the 2021-01 latest editions shall apply.

15.1.6 Safety characteristic data**NOTICE**

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.

**INFORMATION**

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAscal software tool to calculate the safety function's SIL/PL values.

15.1.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF

15.1.8 Order reference

15.1.8.1 Product

Product type	Features	Order no.
PNOZ yi1 4DI	Expansion module with 2 input functions, AND-link	2A000004

15.1.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 12.5 mm	750002
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 12.5 mm	751002

15.2 PNOZ yi2 4DI OR

15.2.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 2 input functions to connect safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ Input functions are OR-linked
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input



NOTICE

Required firmware version of the head module: ≥ 1.0


15.2.2 Front view

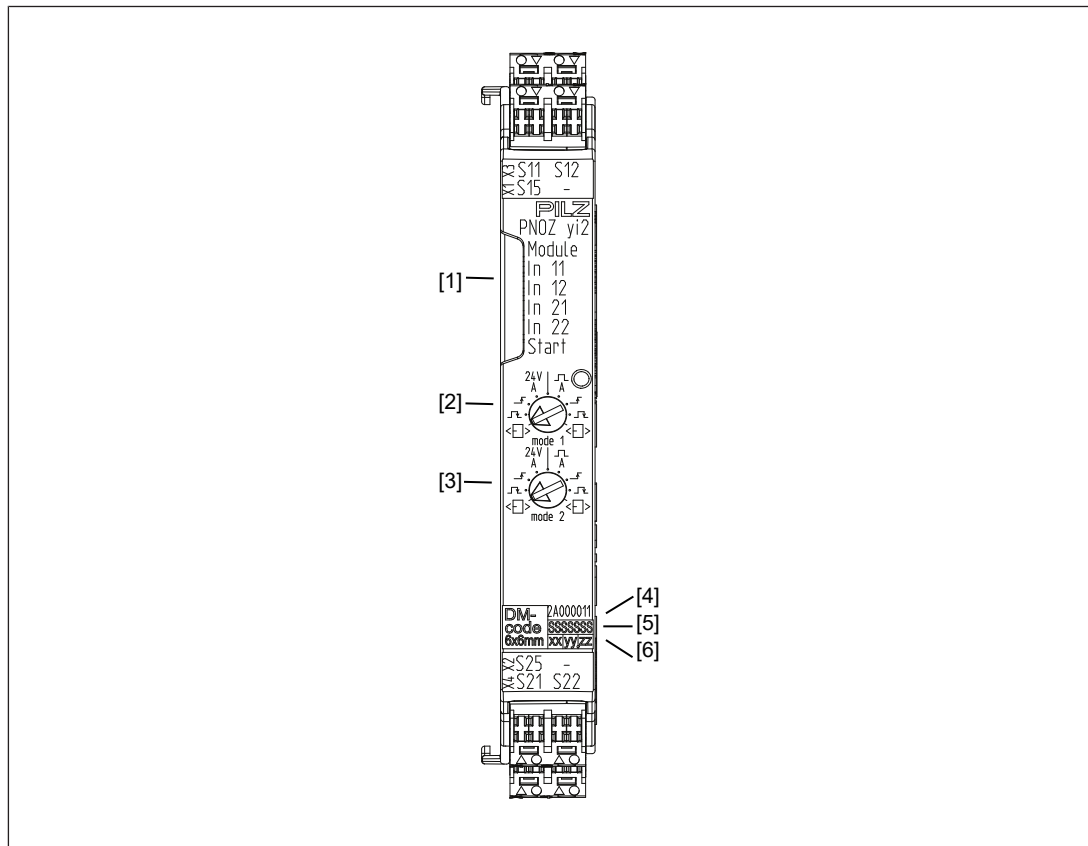


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Rotary switch for start types and test pulse evaluation (S21, S22)
- [4] Order number
- [5] Serial number
- [6] Device version

15.2.3 Block diagram

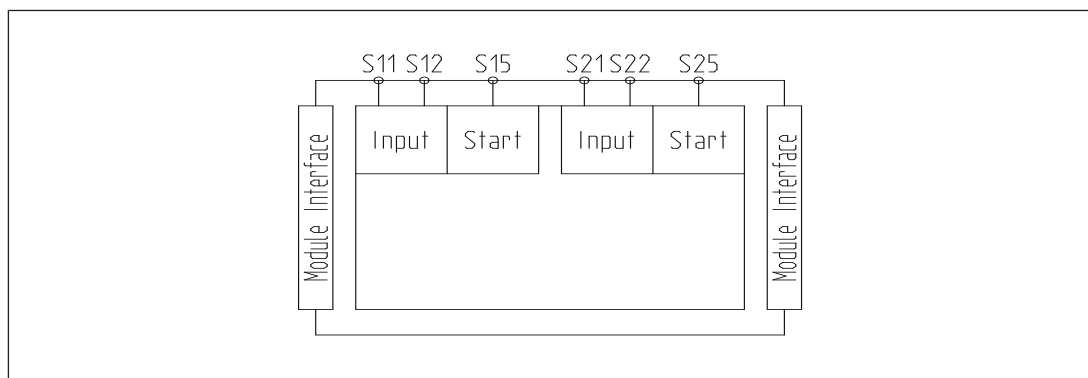

15.2.4 Dimensions

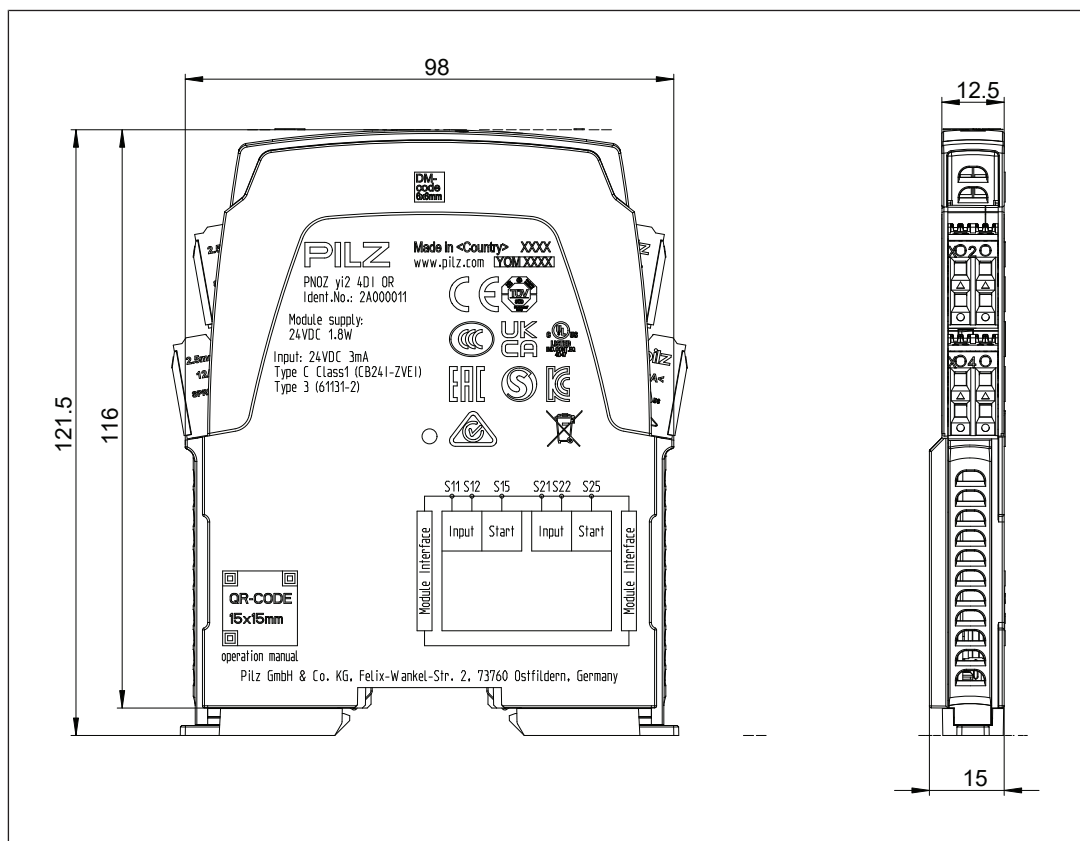

15.2.5 Technical details

General

Certifications **CE, EAC (Eurasian), TÜV, cULus Listed**

Electrical data

Supply voltage

for

internal

Voltage

Kind

Current consumption

Module supply

via head module

24 V

DC

35 mA

Duty cycle

100 %

Status indicator

LED

Inputs

Number

4

Number of start inputs

2

Input voltage in accordance with EN 61131-2 Type 1 **24 V DC**

Input current at rated voltage **2,8 mA**

Input current range **2 - 3 mA**

Pulse suppression **1 ms**

Maximum input delay **1,5 ms**

Inputs	
Potential isolation	No
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms
Min. start pulse duration with a monitored start	
With rising edge	100 ms
with rising and falling edge	150 ms
Max. start pulse duration with a monitored start	
with rising and falling edge	2 s
Supply interruption before de-energisation	20 ms
Simultaneity, input circuit	∞
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2
Protection type	
In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54
Mechanical data	
Mounting position	Any

Mechanical data		
DIN rail		
Top hat rail		35 x 7,5 EN 50022
Recess width		27 mm
Max. cable length		
Max. cable length per input		1 km
Material		
Bottom		PC
Top		PC
Connection type		Spring-loaded terminal, screw terminal
Mounting type		plug-in
Conductor cross section with screw terminals		
1 core flexible		0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve		0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors		0,25 - 1,5 mm², 24 - 16 AWG
Torque setting with screw terminals		0,5 Nm
Stripping length with screw terminals		8 mm
Conductor cross section with spring-loaded terminals:		
Flexible with/without crimp connector		0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection		
		2
Stripping length with spring-loaded terminals		9 mm
Dimensions		
Height		98 mm
Width		12,5 mm
Depth		121 mm
Weight		77 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.2.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.2.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF

15.2.8 Order reference

15.2.8.1 Product

Product type	Features	Order no.
PNOZ yi2 4DI OR	Expansion module with 2 input functions, OR-link	2A000011

15.2.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 12.5 mm	750002
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 12.5 mm	751002

15.3 PNOZ yi3 2DI T3A

15.3.1 Device features

- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect a two-hand pushbutton (Type III A)
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ Input functions are AND-linked
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input



NOTICE


Required firmware version of the head module: ≥ 1.0



NOTICE

The expansion module may not be used on press controllers. For these we recommend the expansion module PNOZ yi4. It is only suitable for use where the risk analysis has established a low level of risk (e.g. EN ISO 13849-1 Cat. 1)


15.3.2 Front view

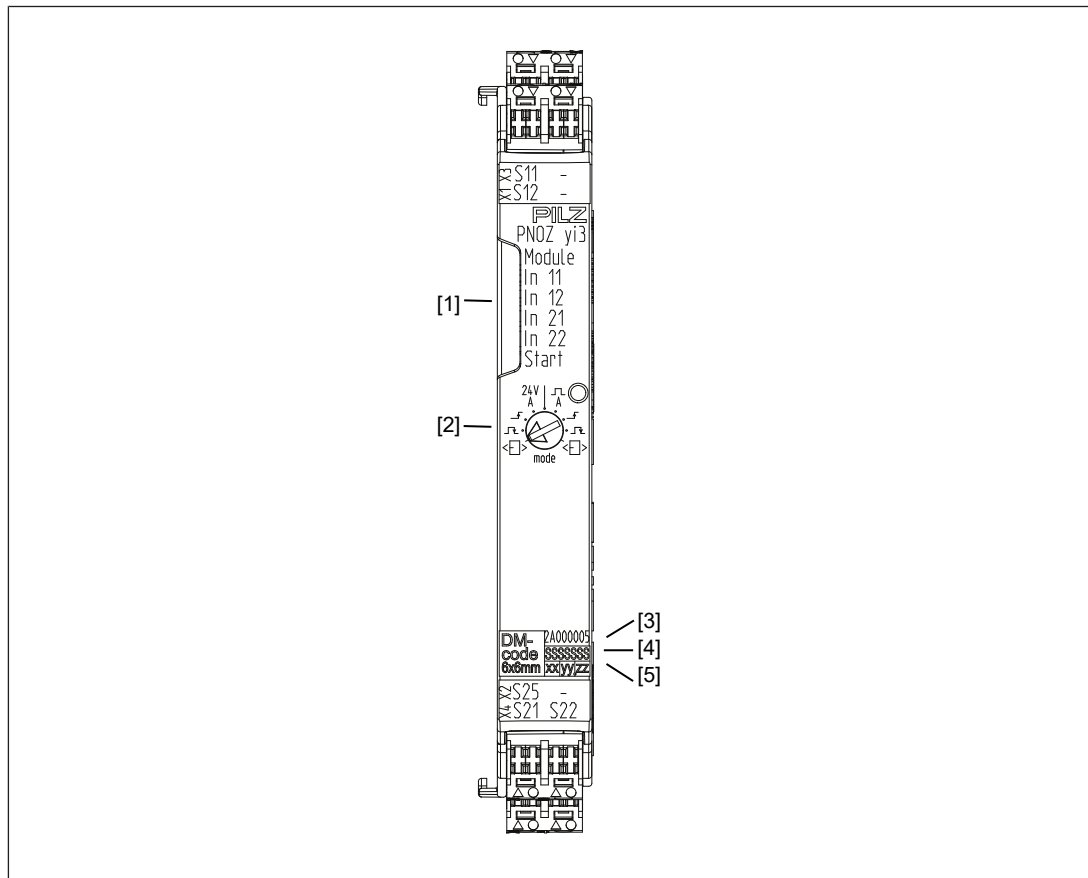


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S21, S22)
- [3] Order number
- [4] Serial number
- [5] Device version

15.3.3 Block diagram

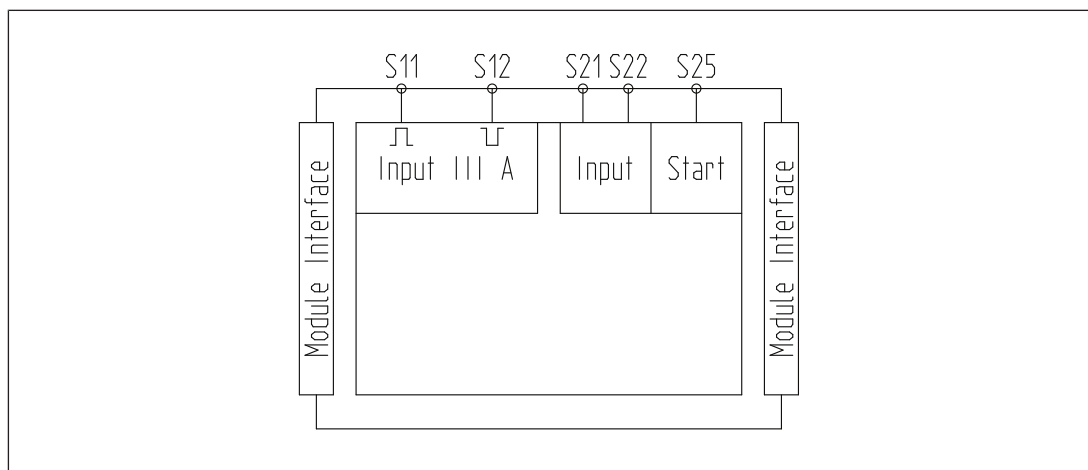

15.3.4 Dimensions

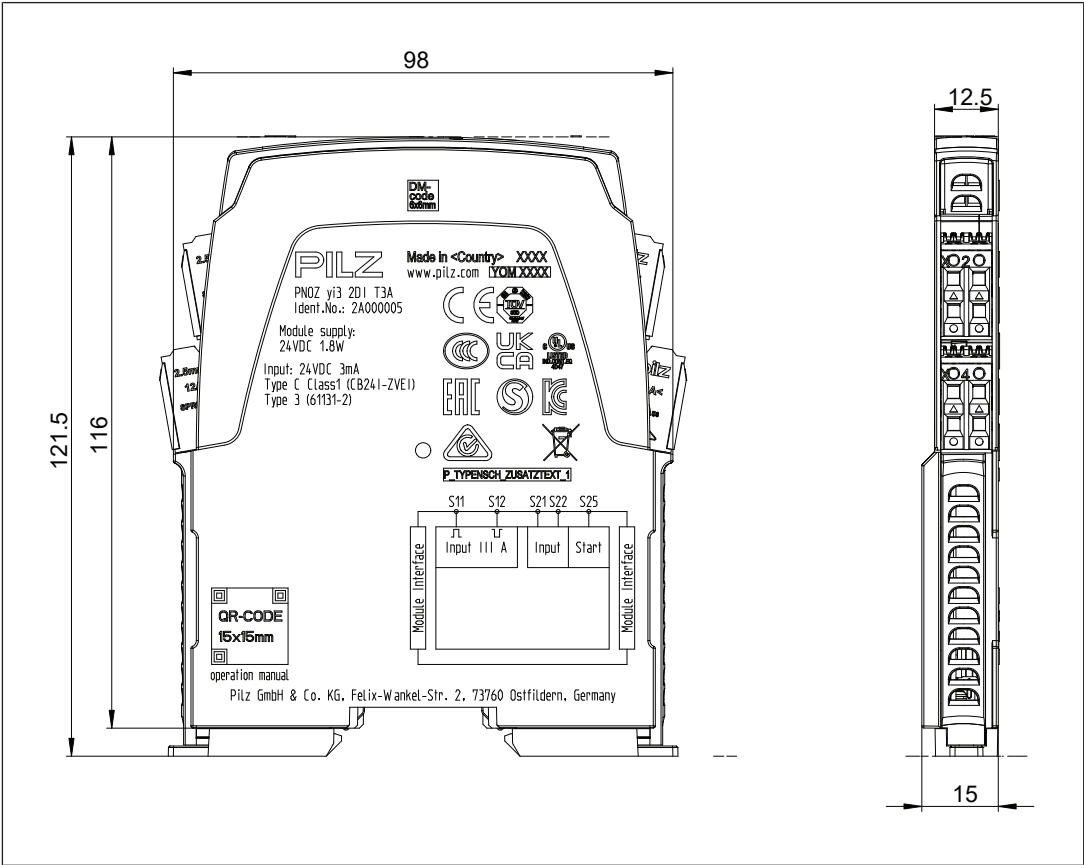

15.3.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	35 mA
Duty cycle	100 %
Status indicator	LED
Two-hand control relay type	
In accordance with the standard	EN 574
Type	III A

Inputs	
Number	4
Number of start inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms
Min. start pulse duration with a monitored start	
With rising edge	100 ms
with rising and falling edge	150 ms
Max. start pulse duration with a monitored start	
with rising and falling edge	2 s
Supply interruption before de-energisation	20 ms
Simultaneity in the two-hand circuit	0,5 s
Simultaneity, input circuit	∞
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms

Environmental data

Airgap creepage

In accordance with the standard **EN 60947-5-1**Overvoltage category **III**Pollution degree **2**

Protection type

In accordance with the standard **EN 60529**Housing **IP20**Terminals **IP20**Mounting area (e.g. control cabinet) **IP54****Mechanical data**Mounting position **Any**

DIN rail

Top hat rail **35 x 7,5 EN 50022**Recess width **27 mm**

Max. cable length

Max. cable length per input **1 km**

Material

Bottom **PC**Top **PC**Connection type **Spring-loaded terminal, screw terminal**Mounting type **plug-in**

Conductor cross section with screw terminals

1 core flexible **0,25 - 2,5 mm², 24 - 12 AWG**2 core with the same cross section, flexible with crimp connectors, no plastic sleeve **0,25 - 1 mm², 24 - 16 AWG**2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors **0,25 - 1,5 mm², 24 - 16 AWG**Torque setting with screw terminals **0,5 Nm**Stripping length with screw terminals **8 mm**

Conductor cross section with spring-loaded terminals:

Flexible with/without crimp connector **0,2 - 2,5 mm², 24 - 12 AWG**Spring-loaded terminals: Terminal points per connection **2**Stripping length with spring-loaded terminals **9 mm**

Dimensions

Height **98 mm**Width **12,5 mm**Depth **121 mm**Weight **74 g**

Where standards are undated, the 2021-01 latest editions shall apply.

15.3.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Two-hand function	PL d	Cat. 2	SIL CL 2	6,07E-09	SIL 2	5,32E-04	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.3.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF

15.3.8 Order reference

15.3.8.1 Product

Product type	Features	Order no.
PNOZ yi3 2DI T3A	Expansion module with 1 input function for two-hand monitoring (Type III A), 1 input function for additional safety function	2A000005

15.3.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 12.5 mm	750002
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 12.5 mm	751002

15.4 PNOZ yi4 2DI T3C

15.4.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect a two-hand pushbutton (Type III C), for use on controllers for metal processing presses as a simultaneity component
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ Input functions are AND-linked
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input



NOTICE

Required firmware version of the head module: ≥ 1.0


15.4.2 Front view

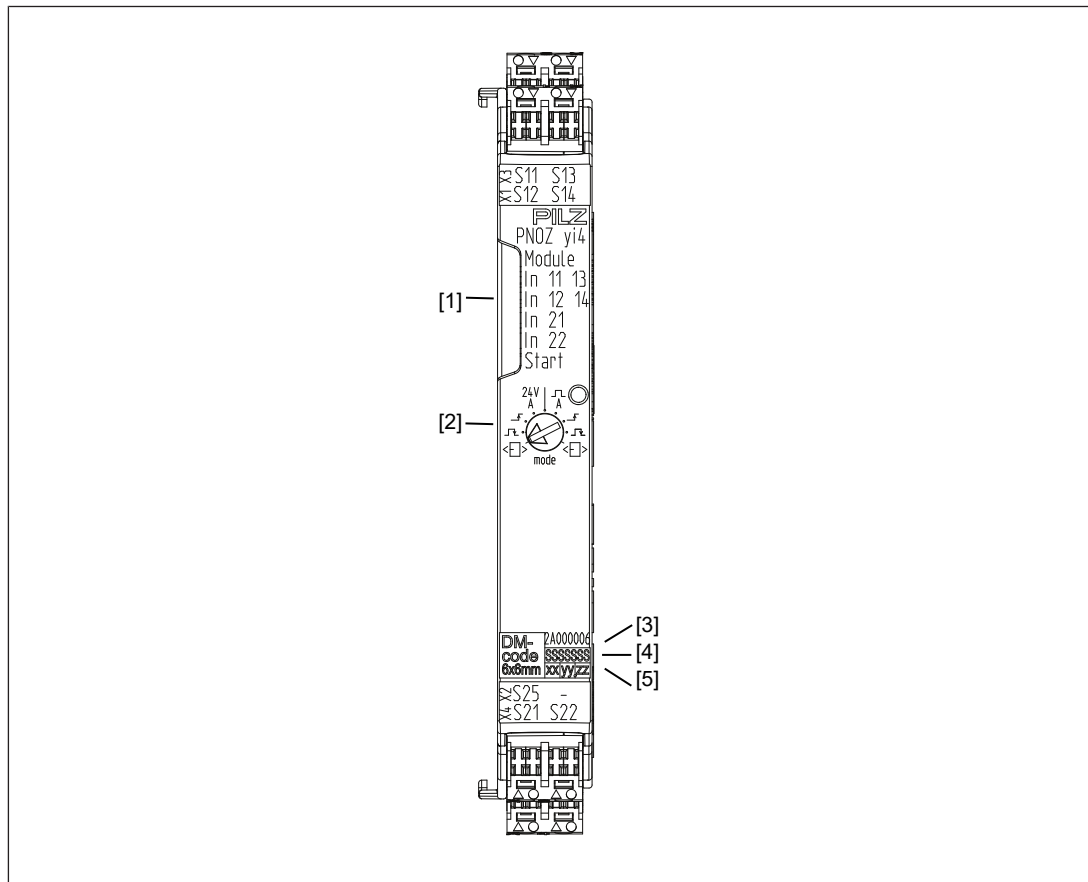


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S21, S22)
- [3] Order number
- [4] Serial number
- [5] Device version

15.4.3 Block diagram

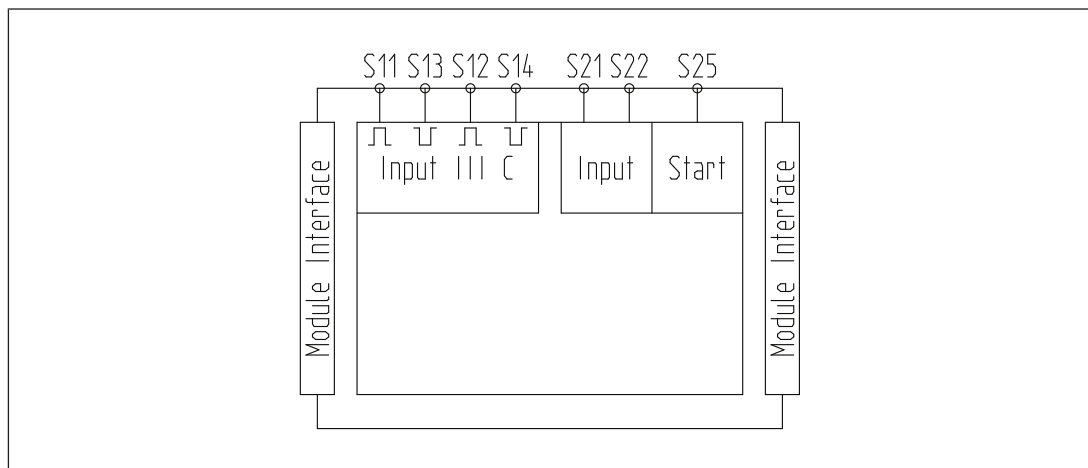

15.4.4 Dimensions

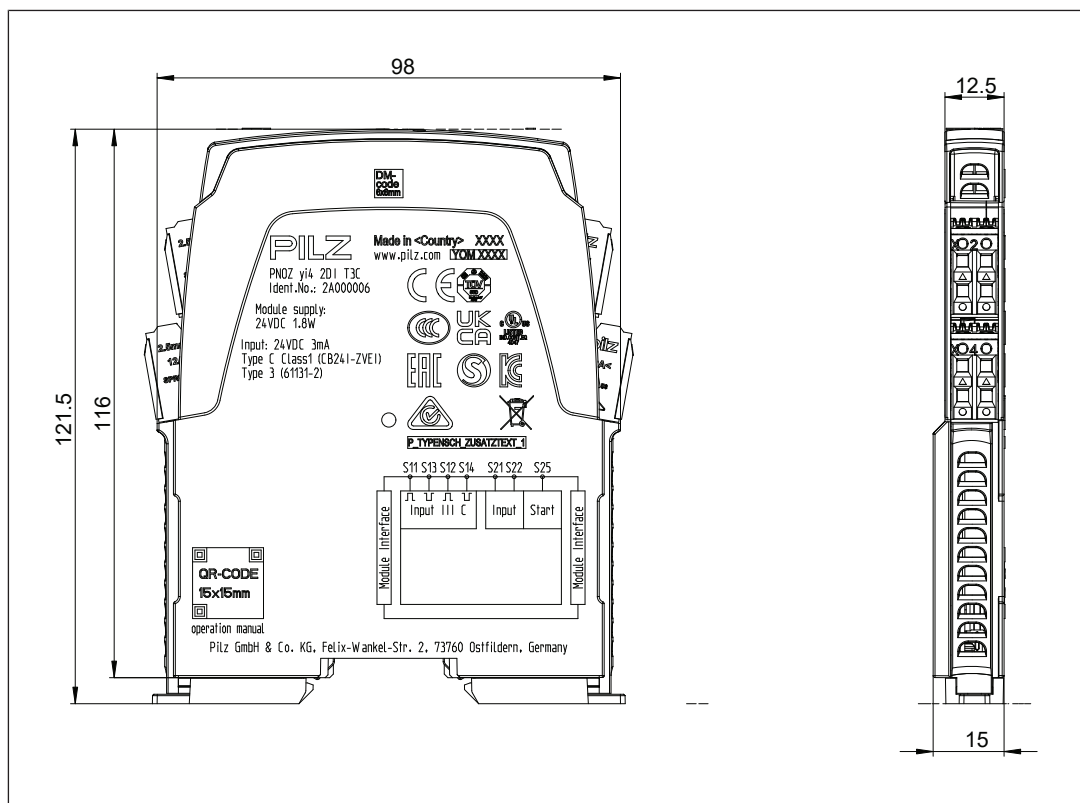

15.4.5 Technical details

General

Certifications **CE, EAC (Eurasian), TÜV, cULus Listed**

Electrical data

Supply voltage

for

internal

Voltage

Kind

Current consumption

Module supply

via head module

24 V

DC

35 mA

Duty cycle

100 %

Status indicator

LED

Two-hand control relay type

In accordance with the standard

EN 574

Type

III C

Inputs

Number

6

Number of start inputs

1

Input voltage in accordance with EN 61131-2 Type 1 **24 V DC**

Inputs	
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms
Min. start pulse duration with a monitored start	
With rising edge	100 ms
with rising and falling edge	150 ms
Max. start pulse duration with a monitored start	
with rising and falling edge	2 s
Supply interruption before de-energisation	20 ms
Simultaneity in the two-hand circuit	0,5 s
Simultaneity, input circuit	∞
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2

Environmental data

Protection type

In accordance with the standard **EN 60529**Housing **IP20**Terminals **IP20**Mounting area (e.g. control cabinet) **IP54****Mechanical data**Mounting position **Any**

DIN rail

Top hat rail **35 x 7,5 EN 50022**Recess width **27 mm**

Max. cable length

Max. cable length per input **1 km**

Material

Bottom **PC**Top **PC**Connection type **Spring-loaded terminal, screw terminal**Mounting type **plug-in**

Conductor cross section with screw terminals

1 core flexible **0,25 - 2,5 mm², 24 - 12 AWG**2 core with the same cross section, flexible with
crimp connectors, no plastic sleeve **0,25 - 1 mm², 24 - 16 AWG**2 core with the same cross section, flexible without
crimp connectors or with TWIN crimp connectors **0,25 - 1,5 mm², 24 - 16 AWG**Torque setting with screw terminals **0,5 Nm**Stripping length with screw terminals **8 mm**

Conductor cross section with spring-loaded terminals:

Flexible with/without crimp connector **0,2 - 2,5 mm², 24 - 12 AWG**

Spring-loaded terminals: Terminal points per connection

2Stripping length with spring-loaded terminals **9 mm**

Dimensions

Height **98 mm**Width **12,5 mm**Depth **121 mm**Weight **74 g**

Where standards are undated, the 2021-01 latest editions shall apply.

15.4.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Two-hand function	PL e	Cat. 4	SIL CL 3	3,19E-10	SIL 3	2,76E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.4.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF

15.4.8 Order reference

15.4.8.1 Product

Product type	Features	Order no.
PNOZ yi4 2DI T3C	Input module with 1 input function for two-hand monitoring (Type III C), 1 input function for additional safety function	2A000006

15.4.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 12.5 mm	750002
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 12.5 mm	751002

15.5 PNOZ yo1 2SO

15.5.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 2 output functions, each with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop
- ▶ 1 signal output, e.g. for display
- ▶ Supply voltage connection for the semiconductor outputs
- ▶ LED display for:
 - Module status
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.5.2 Front view

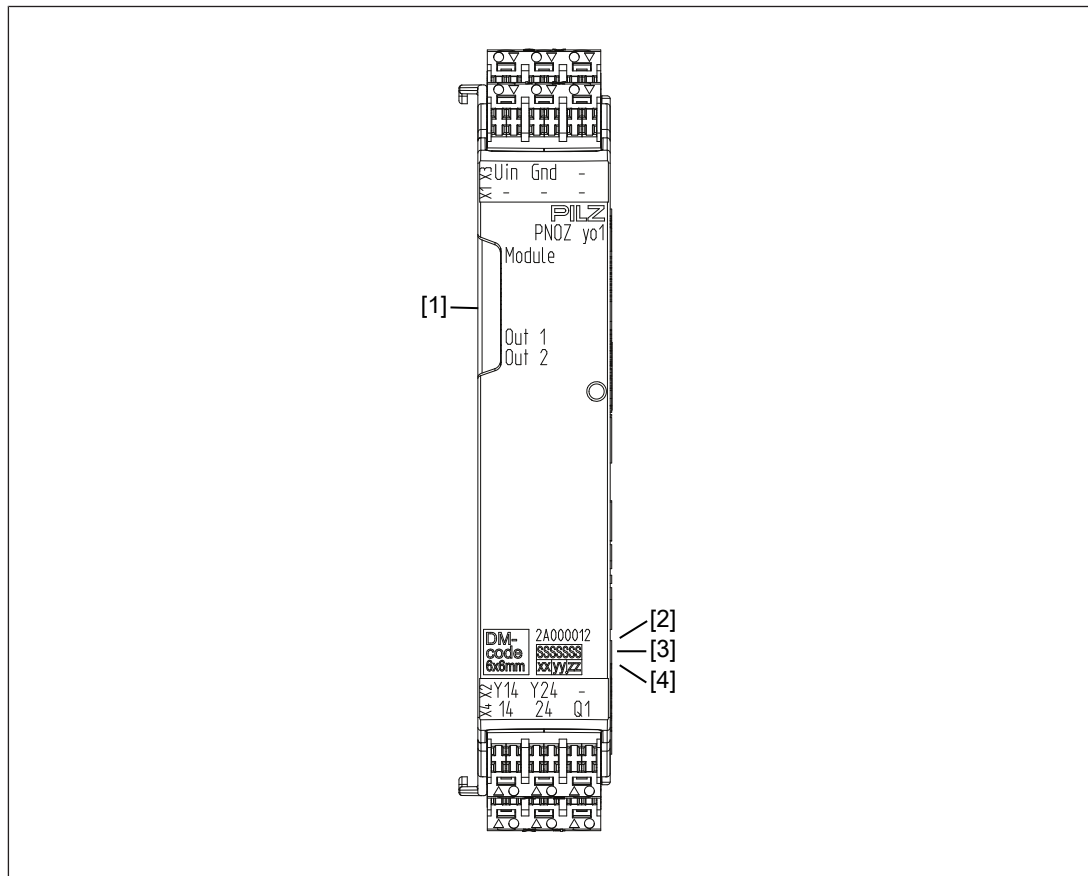


Legend

- [1] LEDs for diagnostics
- [2] Order number
- [3] Serial number
- [4] Device version

15.5.3 Block diagram

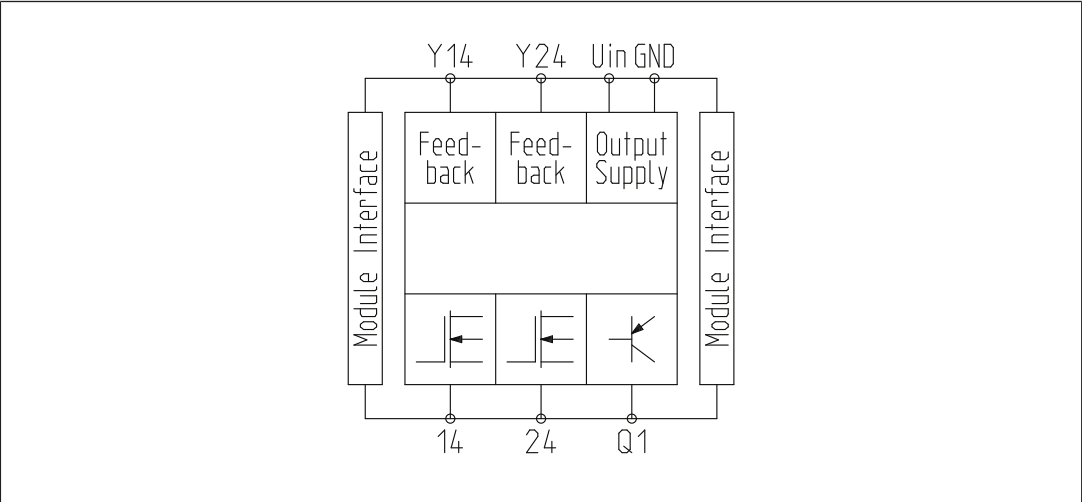

15.5.4 Dimensions

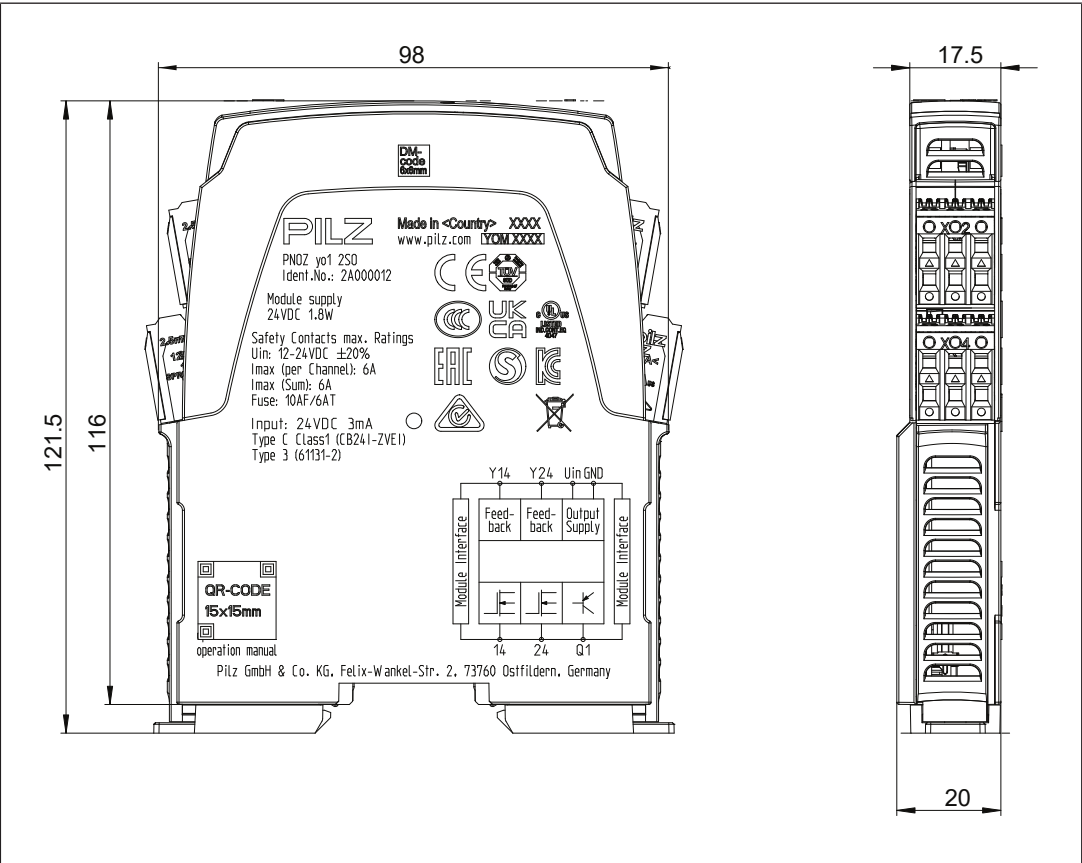

15.5.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Supply to the SC outputs
Voltage	12 - 24 V
Kind	DC
Voltage tolerance	-20 %/+20 %
Max. continuous current that the external power supply must provide	6 A
Potential isolation	No
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	105 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, capacitive, resistive
Inputs	
Number of feedback loop inputs	1
Semiconductor outputs	
Number of safety outputs	
Instantaneous	2
Switching capability	
Voltage	12 - 24 V
Current	6 A
Residual current at "0" signal	0,5 mA
Max. transient pulsed current	100 A
Max. capacitive load	2,5 µF
Max. internal voltage drop	160 mV
Max. duration of off time during self test	500 µs
Potential isolation	No
Short circuit-proof	yes
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Times	
Supply interruption before de-energisation	20 ms

Environmental data

Ambient temperature

In accordance with the standard

EN 60068-2-14

Temperature range

-10 - 55 °C

Storage temperature

In accordance with the standard

EN 60068-2-1/-2

Temperature range

-40 - 85 °C

Climatic suitability

In accordance with the standard

EN 60068-2-78

Condensation during operation

Not permitted

Max. operating height above sea level

5000 m

EMC

EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Vibration

In accordance with the standard

EN 60068-2-6

Frequency

10 - 55 Hz

Amplitude

0,35 mm

Shock stress

In accordance with the standard

EN 60068-2-27

Acceleration

15g

Duration

11 ms

Airgap creepage

In accordance with the standard

EN 60947-5-1

Overvoltage category

III

Pollution degree

2

Protection type

In accordance with the standard

EN 60529

Housing

IP20

Terminals

IP20

Mounting area (e.g. control cabinet)

IP54**Mechanical data**

Mounting position

Any

DIN rail

Top hat rail

35 x 7,5 EN 50022

Recess width

27 mm

Material

Bottom

PC

Top

PC

Connection type

Spring-loaded terminal, screw terminal

Mounting type

plug-in

Conductor cross section with screw terminals

1 core flexible

0,25 - 2,5 mm², 24 - 12 AWG

2 core with the same cross section, flexible with crimp connectors, no plastic sleeve

0,25 - 1 mm², 24 - 16 AWG

2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors

0,25 - 1,5 mm², 24 - 16 AWG

Mechanical data

Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals: Flexible with/without crimp connector	0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	85 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.5.6 Safety characteristic data**NOTICE**

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
SC output, single	2-channel	PL e	Cat. 4	SIL CL 3	6,44E-10	SIL 3	5,43E-05	20
SC output, redundant	2-channel	PL e	Cat. 4	SIL CL 3	9,68E-10	SIL 3	8,16E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.

**INFORMATION**

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.5.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Single-pole output

Interfaces

Source

Interface

Module

Class

C2

Drain

Interface

Actuator

Class

C1, C2

Source parameters

Max. test pulse duration

500 µs

Max. rated current

6 A

Max. capacitive load

2,5 µF

15.5.8 Order reference

15.5.8.1 Product

Product type	Features	Order no.
PNOZ yo1 2SO	Expansion module with 2 output functions, instantaneous semiconductor output	2A000012

15.5.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.6 PNOZ yo2 3NO

15.6.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 output function with 3 safe relay outputs, positive-guided, instantaneous, and 1 input for feedback loop
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.6.2 Front view

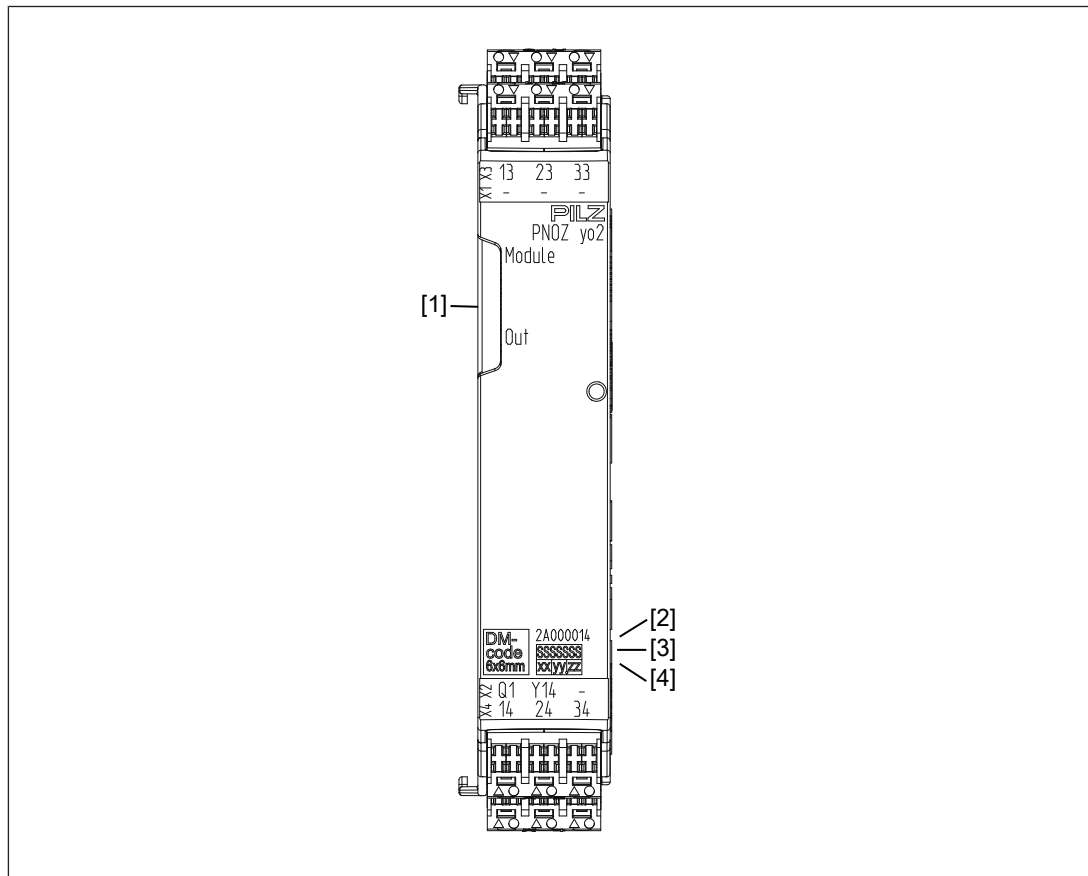


Legend

- [1] LEDs for diagnostics
- [2] Order number
- [3] Serial number
- [4] Device version

15.6.3 Block diagram

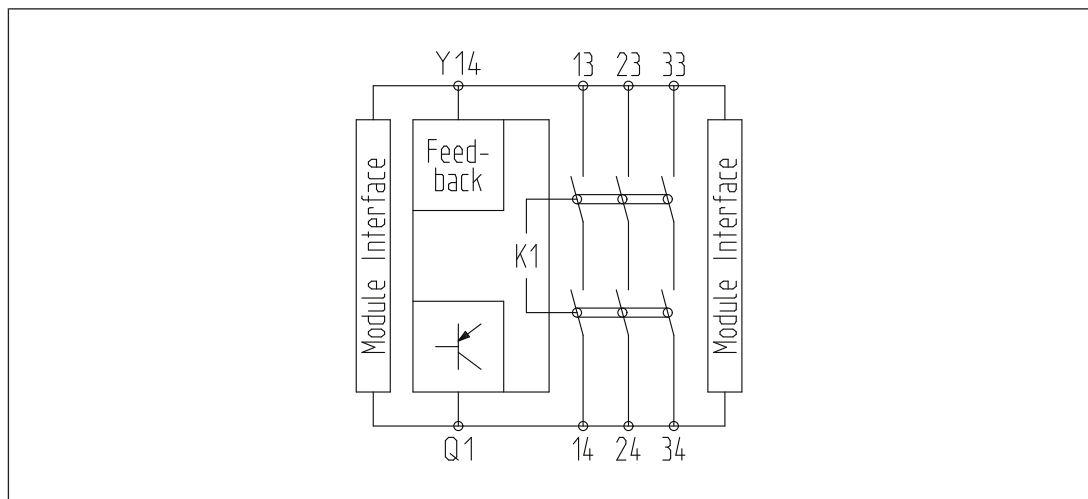

15.6.4 Dimensions

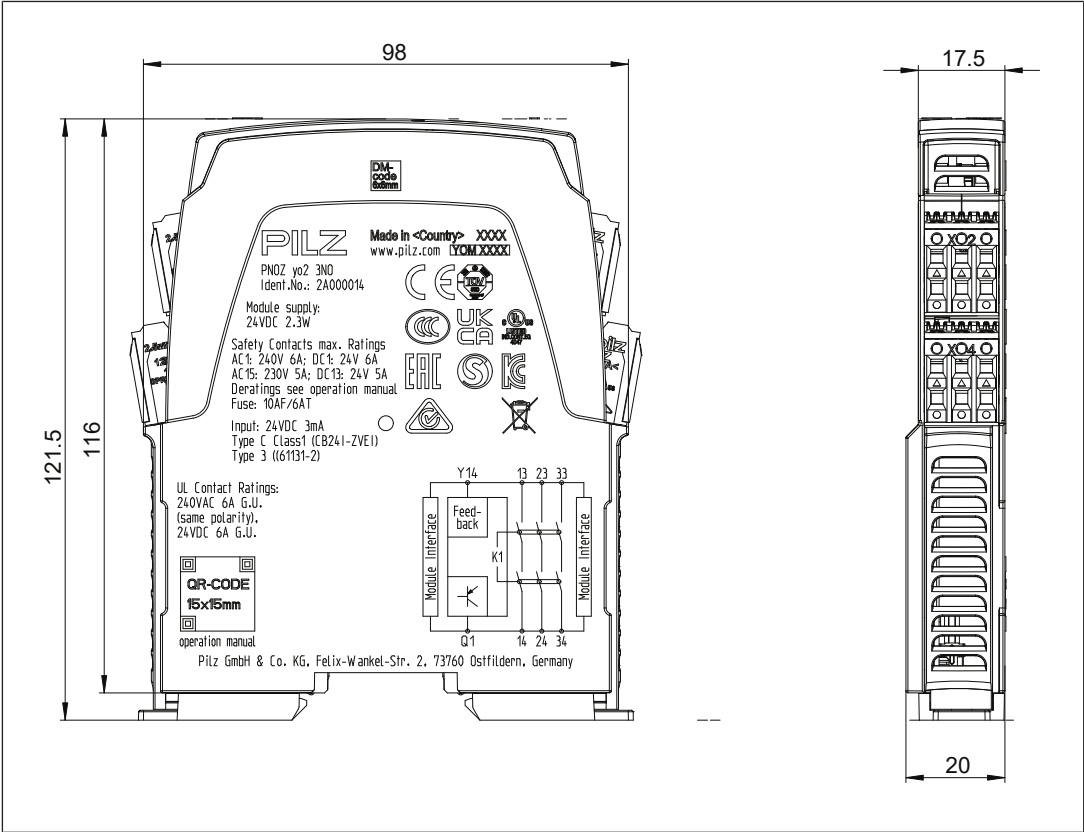

15.6.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	125 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, resistive
Inputs	
Number of feedback loop inputs	1
Signal output	
Quantity	1
Voltage	24 V

Signal output	
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Relay outputs	
Number of output contacts	
Safety contacts (N/O), instantaneous	3
Max. short circuit current I _K	1 kA
Utilisation category	
In accordance with the standard	EN 60947-4-1
Utilisation category of safety contacts	
AC1 at	240 V
Min. current	10 mA
Max. current	6 A
Max. power	1500 VA
DC1 at	24 V
Min. current	5 mA
Max. current	6 A
Max. power	150 W
Utilisation category	
In accordance with the standard	EN 60947-5-1
Utilisation category of safety contacts	
AC15 at	230 V
Max. current	5 A
Max. power	1.150 W
DC13 (6 cycles/min) at	24 V
Max. current	5 A
Max. power	120 W
Utilisation category in accordance with UL	
Voltage	240 V AC G.U. Resistive
With current	6 A
Voltage	24 V DC G. U. Resistive
With current	6 A
Pilot Duty; R300	24 V DC
With current	3 A
Pilot Duty; B300	230 V AC
With current	3 A
External contact fuse protection, safety contacts	
In accordance with the standard	EN 60947-5-1
Max. melting integral	132 A²s
Blow-out fuse, quick	10 A
Blow-out fuse, slow	6 A
Blow-out fuse, gG	10 A
Contact material	AgCuNi + 0,2 µm Au
Potential isolation	yes

Conventional thermal current while loading several contacts

Ith per contact at UB DC; AC1: 240 V, DC1: 24 V

Conv. therm. current with 1 contact	6 A
Conv. therm. current with 2 contacts	5,5 A
Conv. therm. current with 3 contacts	4,5 A

Times

Supply interruption before de-energisation	20 ms
--	--------------

Environmental data

Ambient temperature

In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C

Storage temperature

In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C

Climatic suitability

In accordance with the standard	EN 60068-2-78
---------------------------------	----------------------

Condensation during operation

Not permitted

EMC

EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Vibration

In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm

Shock stress

In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms

Airgap creepage

In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2

Protection type

In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54

Potential isolation

Potential isolation between	Output and system voltage
Type of potential isolation	Protective separation
Rated insulation voltage	250 V
Rated surge voltage	6000 V

Mechanical data

Mounting position	Any
Mechanical life	10,000,000 cycles

Mechanical data	
DIN rail	
Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm
Material	
Bottom	PC
Top	PC
Connection type	Spring-loaded terminal, screw terminal
Mounting type	plug-in
Conductor cross section with screw terminals	
1 core flexible	0,25 - 2,5 mm ² , 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm ² , 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm ² , 24 - 16 AWG
Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals: Flexible with/without crimp connector	0,2 - 2,5 mm ² , 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	113 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.6.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015	EN ISO 13849-1: 2015	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
	PL	Category					
2-channel	PL e	Cat. 4	SIL CL 3	8,75E-10	SIL 3	7,21E-05	20

Explanatory notes for the safety-related characteristic data:

- The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.

- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PASCAL software tool to calculate the safety function's SIL/PL values.

15.6.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Relay outputs

Interfaces

Source

Interface	Module
Class	A

Drain

Interface	Actuator
Class	A

Source parameters

Min. switching voltage	12 V
Max. switching voltage	250 V
Min. switching current	5 mA
Max. switching current	6 A
Potential isolation	yes

15.6.8 Supplementary data

15.6.8.1 Permitted operating height

The values stated in the technical details apply to the use of the device in operating heights up to max. 2000 m above sea level. When used in greater heights, constraints have to be taken into account:

- ▶ Permitted maximum operating height 5000 m

Reduction of the voltage at the relay outputs at $U_B = 30\text{ V}$ depending on the operating height

Prerequisite:

- ▶ Overvoltage category: III
- ▶ Pollution degree: 2

Maximum operating height	Max. voltage at the relay output
2000 m	300 V
3000 m	150 V
4000 m	150 V
5000 m	150 V

- ▶ From an operating height of 2000 m the max. permitted ambient temperature is reduced by 0.5 °C/100 m

Operating height	Permitted ambient temperature
3000 m	50 °C
4000 m	45 °C
5000 m	40 °C

15.6.8.2 Service life graph




CAUTION!

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switch frequency and the load of the relay output.

If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switch frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

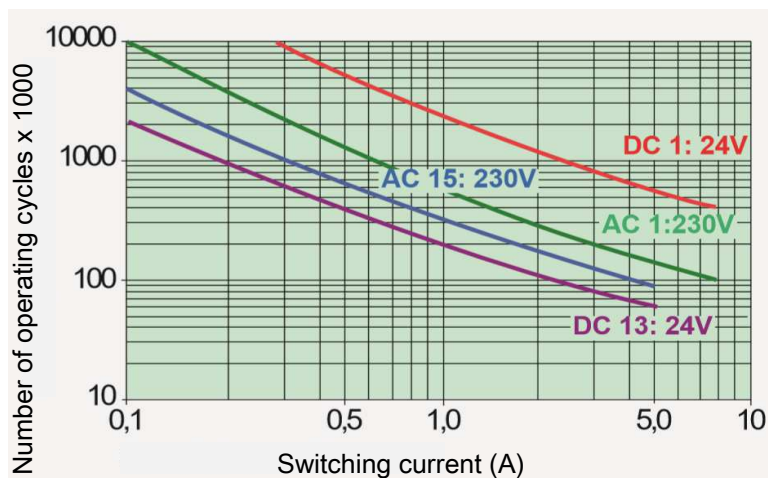**Example**

- ▶ Inductive load: 0.3 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1 000 000 cycles

Provided the application to be implemented requires fewer than 1 000 000 cycles, the PFH value (see [Technical details \[96\]](#)) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With DC contactors, use flywheel diodes for spark suppression.

15.6.9 Order reference

15.6.9.1 Product

Product type	Features	Order no.
PNOZ yo2 3NO	Expansion module with 1 output function, instantaneous relay outputs	2A000014

15.6.9.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.7 PNOZ yo3 1SO 1SO t

15.7.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 output function with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop
- ▶ 1 output function with 1 safe semiconductor output, delayed, and 1 input for feedback loop
- ▶ Delay time can be set via rotary switches
- ▶ Off or on delay can be selected
- ▶ 1 signal output, e.g. for display
- ▶ Supply voltage connection for the semiconductor outputs
- ▶ LED display for:
 - Module status
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.7.2 Front view

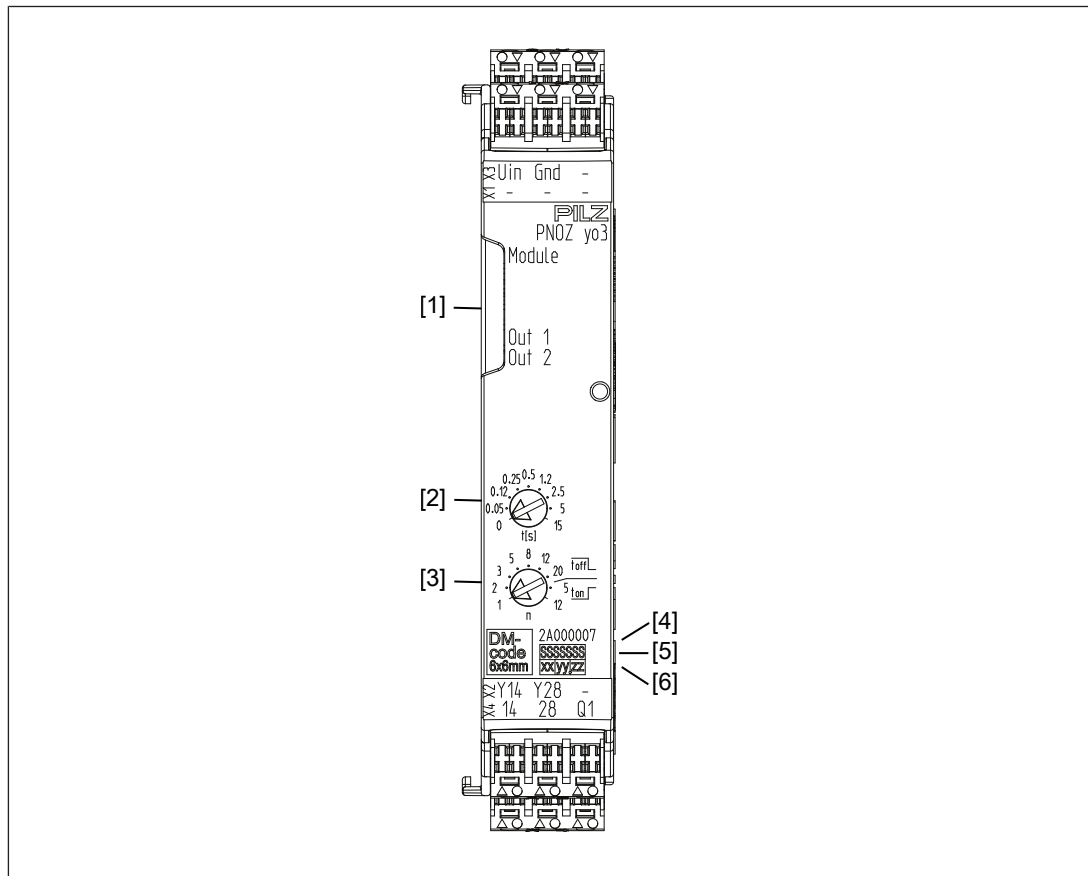


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for time value for delay
- [3] Rotary switch for factor for delay and delay type (on or off)
- [4] Order number
- [5] Serial number
- [6] Device version

15.7.3 Block diagram

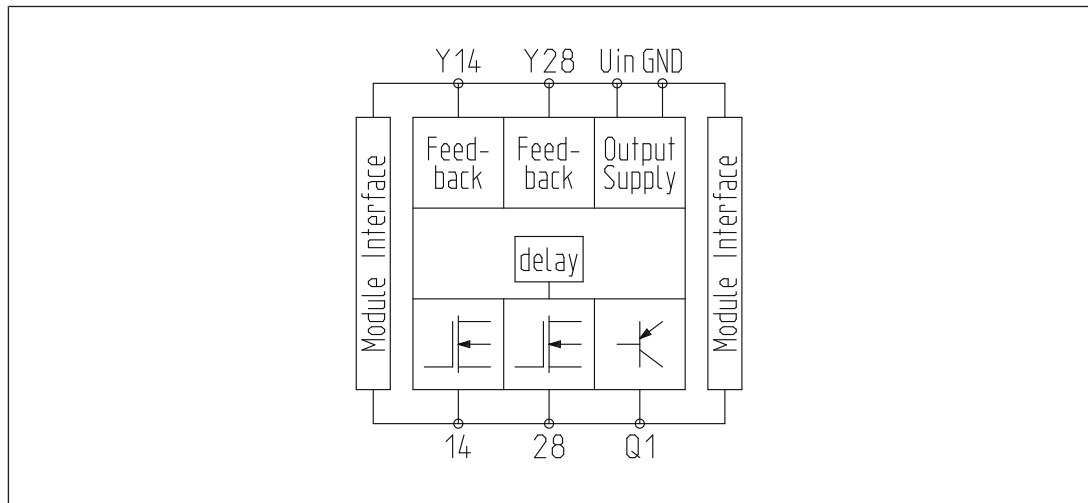

15.7.4 Dimensions

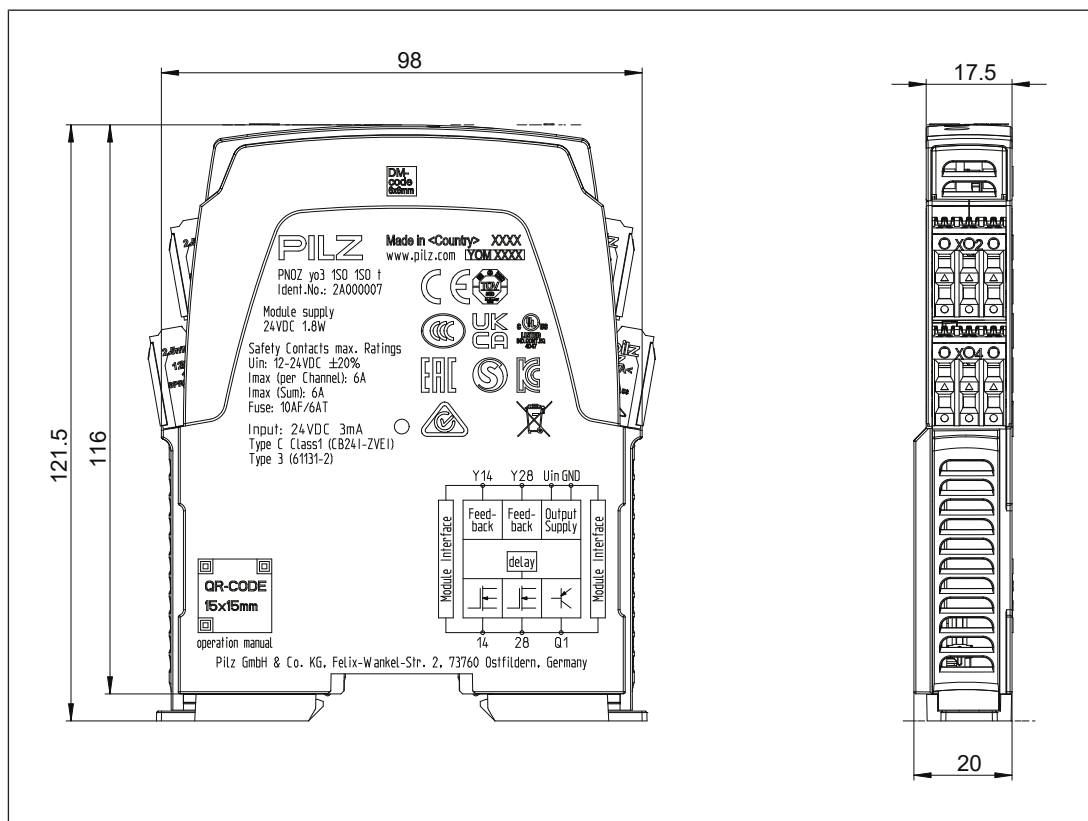

15.7.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Supply to the SC outputs
Voltage	12 - 24 V
Kind	DC
Voltage tolerance	-20 %/+20 %
Max. continuous current that the external power supply must provide	6 A
Potential isolation	No
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	105 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, capacitive, resistive
Inputs	
Number of feedback loop inputs	1
Semiconductor outputs	
Number of safety outputs	
Delayed	1
Instantaneous	1
Switching capability	
Voltage	12 - 24 V
Current	6 A
Residual current at "0" signal	0,5 mA
Max. transient pulsed current	100 A
Max. capacitive load	2,5 µF
Max. internal voltage drop	160 mV
Max. duration of off time during self test	500 µs
Potential isolation	No
Short circuit-proof	yes
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes

Times	
Selectable delay time when switching on	0,25 s, 0,6 s, 1,25 s, 1,44 s, 12,5 s, 14,4 s, 180 s, 2,5 s, 25 s, 3 s, 30 s, 6 s, 60 s, 75 s
Selectable delay time when switching off	0,05 s, 0,1 s, 0,12 s, 0,15 s, 0,24 s, 0,25 s, 0,36 s, 0,4 s, 0,5 s, 0,6 s, 0,75 s, 0,96 s, 1 s, 1,2 s, 1,25 s, 1,44 s, 1,5 s, 10 s, 100 s, 12,5 s, 120 s, 14,4 s, 15 s, 180 s, 2 s, 2,4 s, 2,5 s, 20 s, 24 s, 25 s, 3 s, 3,6 s, 30 s, 300 s, 4 s, 40 s, 45 s, 5 s, 6 s, 60 s, 7,5 s, 75 s, 9,6 s
Time accuracy	+/-1,5 %
Supply interruption before de-energisation	20 ms
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2
Protection type	
In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54
Mechanical data	
Mounting position	Any
DIN rail	
Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm

Mechanical data

Material	
Bottom	PC
Top	PC
Connection type	Spring-loaded terminal, screw terminal
Mounting type	plug-in
Conductor cross section with screw terminals	
1 core flexible	0,25 - 2,5 mm ² , 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm ² , 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm ² , 24 - 16 AWG
Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals:	
Flexible with/without crimp connector	0,2 - 2,5 mm ² , 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	87 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.7.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
SC output, single	2-channel	PL e	Cat. 4	SIL CL 3	6,44E-10	SIL 3	5,43E-05	20
SC output, redundant	2-channel	PL e	Cat. 4	SIL CL 3	9,68E-10	SIL 3	8,16E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.7.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Single-pole output

Interfaces

Source

Interface	Module
Class	C2

Drain

Interface	Actuator
Class	C1, C2

Source parameters

Max. test pulse duration	500 µs
Max. rated current	6 A
Max. capacitive load	2,5 µF

15.7.8 Order reference

15.7.8.1 Product

Product type	Features	Order no.
PNOZ yo3 ISO ISO t	Expansion module with 2 output functions, instantaneous/delayed semiconductor output	2A000007

15.7.8.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.8 PNOZ yo4 3NO t

15.8.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 output function with 3 safe relay outputs, positive-guided, delayed, and 1 input for feed-back loop
- ▶ Delay time can be set via rotary switches
- ▶ Off or on delay can be selected
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.8.2 Front view

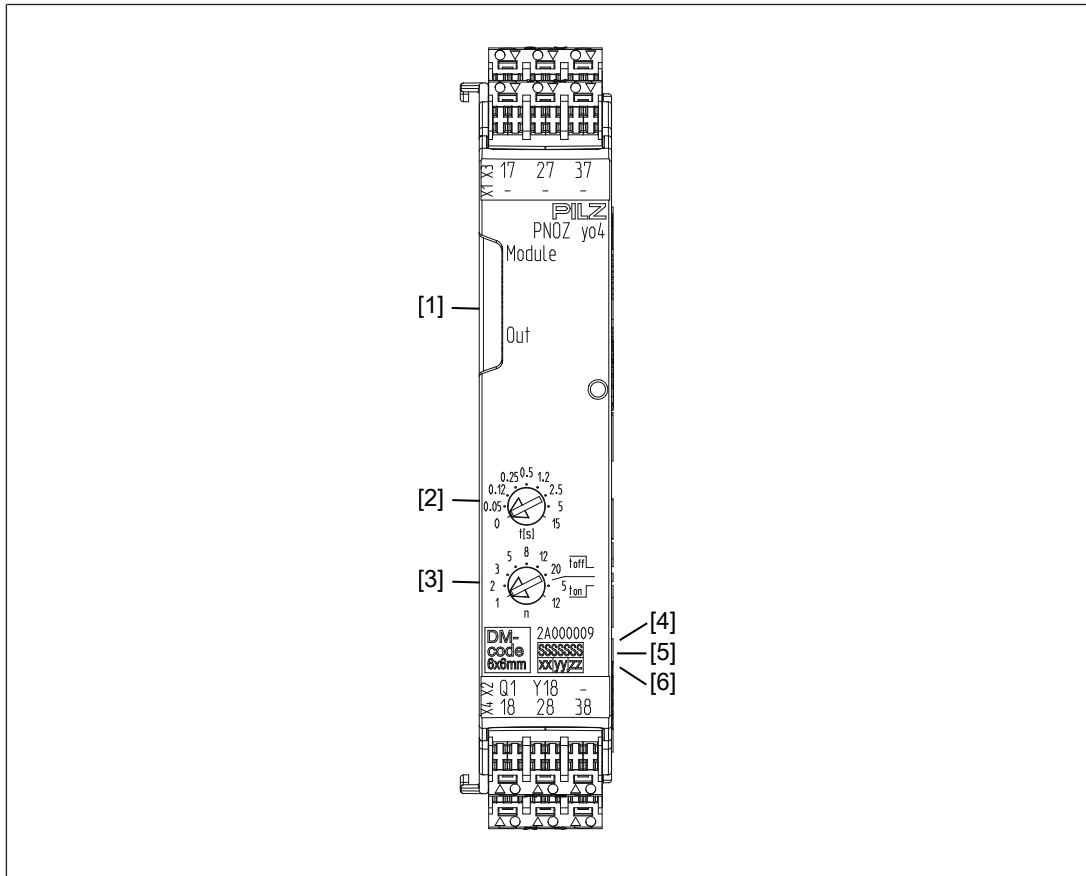


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for time value for delay
- [3] Rotary switch for factor for delay and delay type (on or off)
- [4] Order number
- [5] Serial number
- [6] Device version

15.8.3 Block diagram

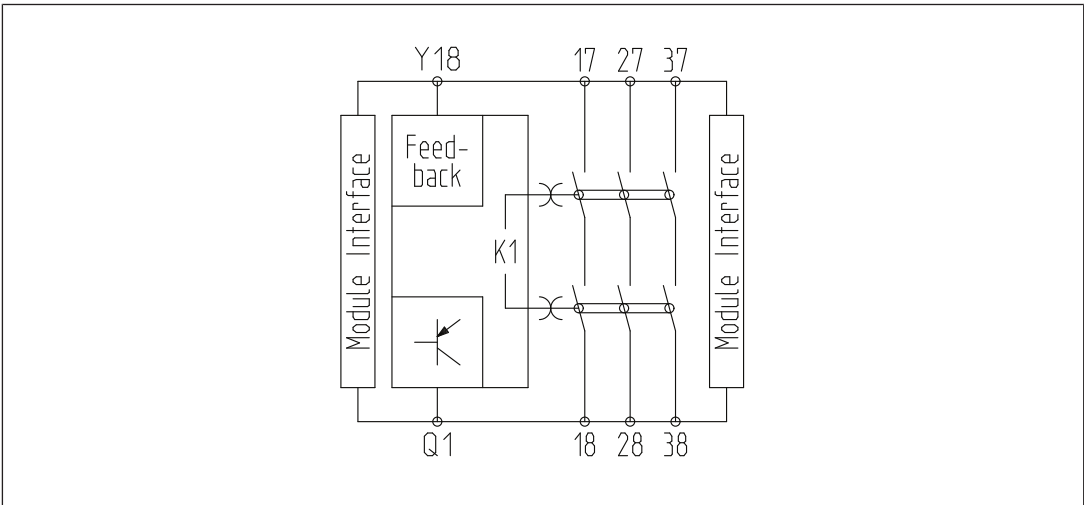

15.8.4 Dimensions

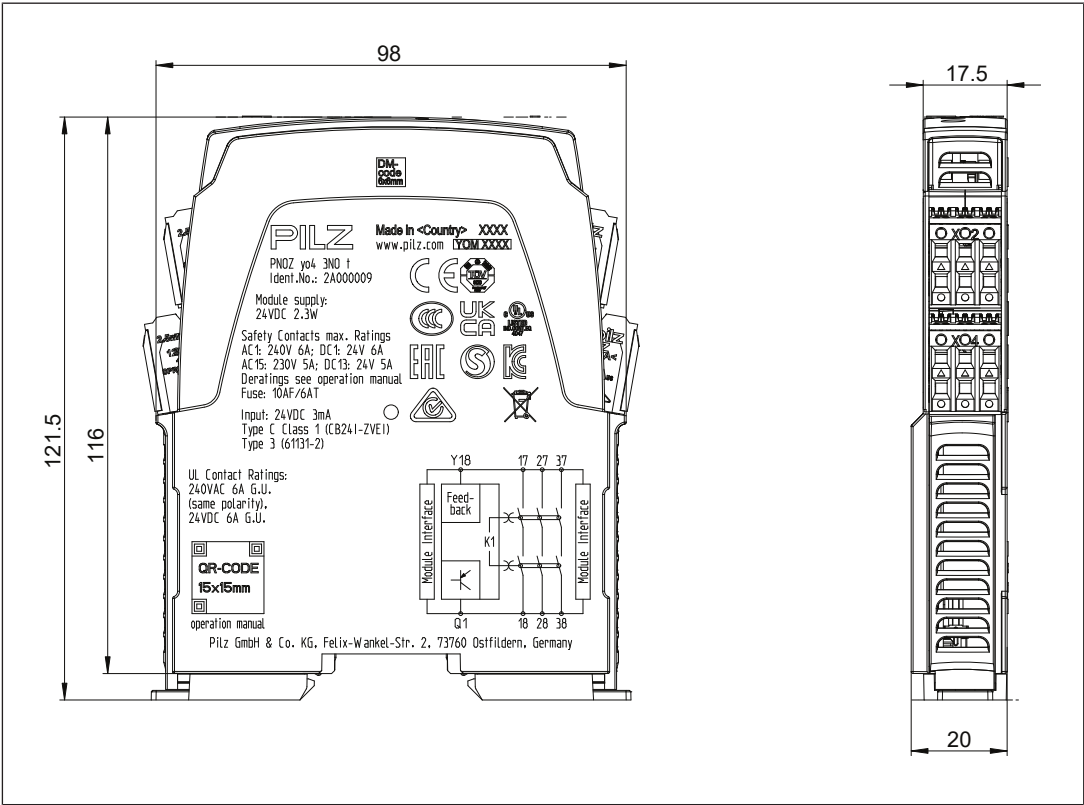

15.8.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	125 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, resistive
Inputs	
Number of feedback loop inputs	1
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Relay outputs	
Number of output contacts	
Safety contacts (N/O), delayed	3
Max. short circuit current I _K	1 kA
Utilisation category	
In accordance with the standard	EN 60947-4-1
Utilisation category of safety contacts	
AC1 at	240 V
Min. current	10 mA
Max. current	6 A
Max. power	1500 VA
DC1 at	24 V
Min. current	5 mA
Max. current	6 A
Max. power	150 W
Utilisation category	
In accordance with the standard	EN 60947-5-1

Relay outputs

Utilisation category of safety contacts

AC15 at	230 V
Max. current	5 A
Max. power	1.150 W
DC13 (6 cycles/min) at	24 V
Max. current	5 A
Max. power	120 W

Utilisation category in accordance with UL

Voltage	240 V AC G.U. Resistive
With current	6 A
Voltage	24 V DC G. U. Resistive
With current	6 A
Pilot Duty; R300	24 V DC
With current	3 A
Pilot Duty; B300	230 V AC
With current	3 A

External contact fuse protection, safety contacts

In accordance with the standard	EN 60947-5-1
Max. melting integral	132 A²s
Blow-out fuse, quick	10 A
Blow-out fuse, slow	6 A
Blow-out fuse, gG	10 A

Contact material **AgCuNi + 0,2 µm Au**Potential isolation **yes****Conventional thermal current while loading several contacts**

Ith per contact at UB DC; AC1: 240 V, DC1: 24 V

Conv. therm. current with 1 contact	6 A
Conv. therm. current with 2 contacts	5,5 A
Conv. therm. current with 3 contacts	4,5 A

TimesSelectable delay time when switching on **0,25 s, 0,6 s, 1,25 s, 1,44 s, 12,5 s, 14,4 s, 180 s, 2,5 s, 25 s, 3 s, 30 s, 6 s, 60 s, 75 s**Selectable delay time when switching off **0,05 s, 0,1 s, 0,12 s, 0,15 s, 0,24 s, 0,25 s, 0,36 s, 0,4 s, 0,5 s, 0,6 s, 0,75 s, 0,96 s, 1 s, 1,2 s, 1,25 s, 1,44 s, 1,5 s, 10 s, 100 s, 12,5 s, 120 s, 14,4 s, 15 s, 180 s, 2 s, 2,4 s, 2,5 s, 20 s, 24 s, 25 s, 3 s, 3,6 s, 30 s, 300 s, 4 s, 40 s, 45 s, 5 s, 6 s, 60 s, 7,5 s, 75 s, 9,6 s**Time accuracy **+/-1,5 %**Supply interruption before de-energisation **20 ms****Environmental data**

Ambient temperature

In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C

Environmental data

Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2
Protection type	
In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54

Potential isolation

Potential isolation between	Output and system voltage
Type of potential isolation	Protective separation
Rated insulation voltage	250 V
Rated surge voltage	6000 V

Mechanical data

Mounting position	Any
Mechanical life	10,000,000 cycles
DIN rail	
Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm
Material	
Bottom	PC
Top	PC
Connection type	Spring-loaded terminal, screw terminal
Mounting type	plug-in

Mechanical data

Conductor cross section with screw terminals

1 core flexible 0,25 - 2,5 mm², 24 - 12 AWG2 core with the same cross section, flexible with crimp connectors, no plastic sleeve 0,25 - 1 mm², 24 - 16 AWG2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors 0,25 - 1,5 mm², 24 - 16 AWG

Torque setting with screw terminals 0,5 Nm

Stripping length with screw terminals 8 mm

Conductor cross section with spring-loaded terminals:

Flexible with/without crimp connector 0,2 - 2,5 mm², 24 - 12 AWG

Spring-loaded terminals: Terminal points per connection 2

Stripping length with spring-loaded terminals 9 mm

Dimensions

Height 98 mm

Width 17,5 mm

Depth 121 mm

Weight 116 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.8.6 Safety characteristic data**NOTICE**

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Operating mode	EN ISO 13849-1: 2015	EN ISO 13849-1: 2015	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
	PL	Category					
2-channel	PL e	Cat. 4	SIL CL 3	8,75E-10	SIL 3	7,21E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PASCAL software tool to calculate the safety function's SIL/PL values.

15.8.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Relay outputs

Interfaces

Source

Interface

Module

Class

A

Drain

Interface

Actuator

Class

A

Source parameters

Min. switching voltage	12 V
Max. switching voltage	250 V
Min. switching current	5 mA
Max. switching current	6 A
Potential isolation	yes

15.8.8 Supplementary data

15.8.8.1 Permitted operating height

The values stated in the technical details apply to the use of the device in operating heights up to max. 2000 m above sea level. When used in greater heights, constraints have to be taken into account:

- ▶ Permitted maximum operating height 5000 m

Reduction of the voltage at the relay outputs at $U_B = 30\text{ V}$ depending on the operating height

Prerequisite:

- ▶ Overvoltage category: III
- ▶ Pollution degree: 2

Maximum operating height	Max. voltage at the relay output
2000 m	300 V
3000 m	150 V
4000 m	150 V
5000 m	150 V

- From an operating height of 2000 m the max. permitted ambient temperature is reduced by 0.5 °C/100 m

Operating height	Permitted ambient temperature
3000 m	50 °C
4000 m	45 °C
5000 m	40 °C

15.8.8.2

Service life graph




CAUTION!

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switch frequency and the load of the relay output.

If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switch frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

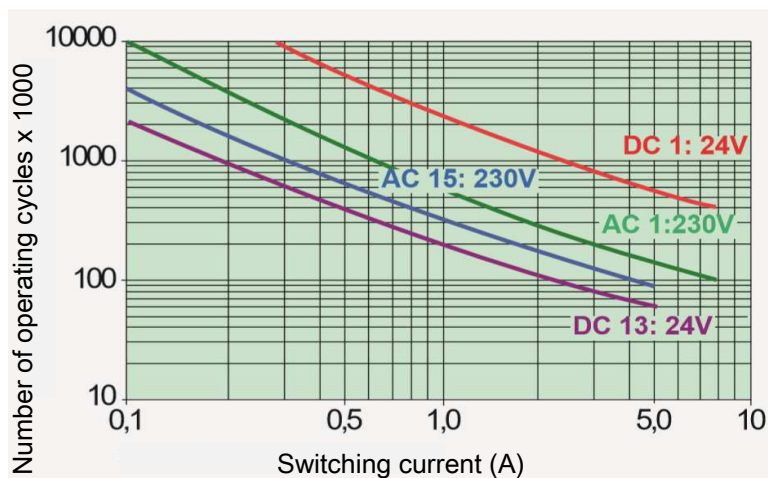

Example

- ▶ Inductive load: 0.3 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1 000 000 cycles

Provided the application to be implemented requires fewer than 1 000 000 cycles, the PFH value (see [Technical details \[114\]](#)) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With DC contactors, use flywheel diodes for spark suppression.

15.8.9 Order reference

15.8.9.1 Product

Product type	Features	Order no.
PNOZ yo4 3NO t	Expansion module with 1 output function, delayed relay outputs	2A000009

15.8.9.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.9 PNOZ yio1 2DI 2SO

15.9.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ 2 output functions, each with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop
- ▶ Supply voltage connection for the semiconductor outputs
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.9.2 Front view

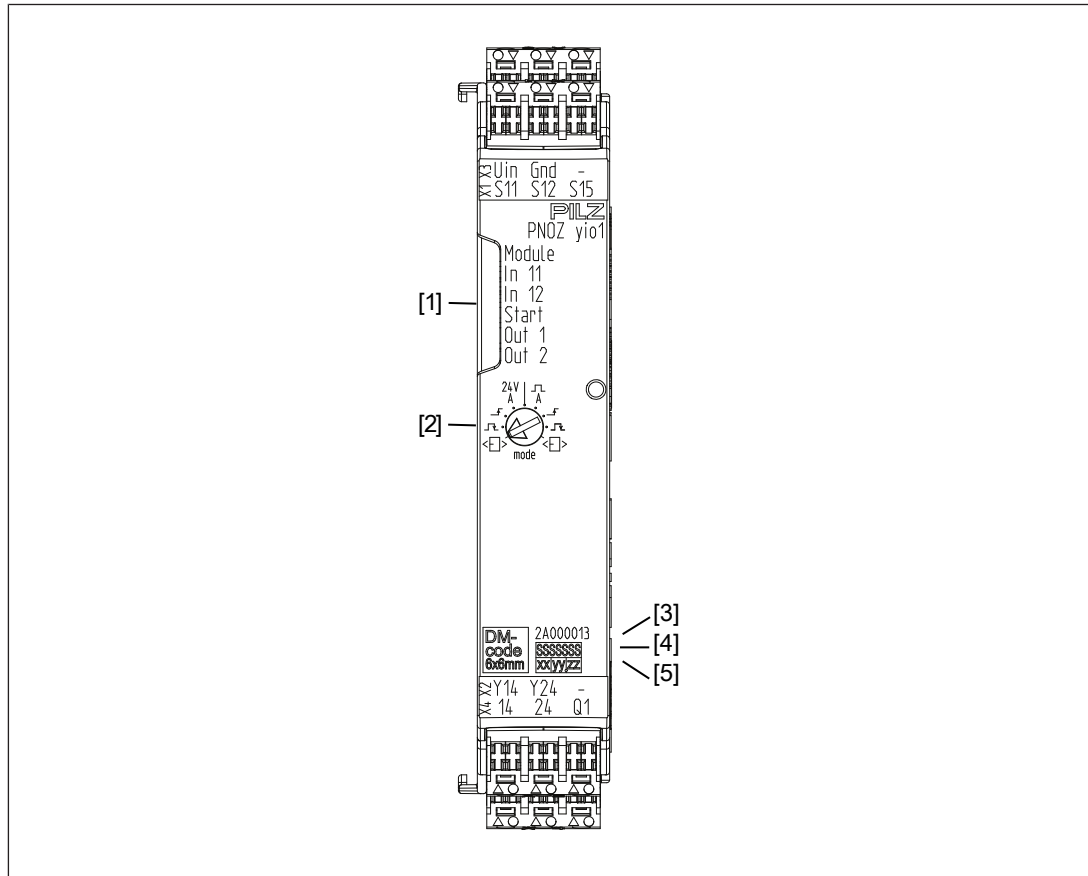


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Order number
- [4] Serial number
- [5] Device version

15.9.3 Block diagram

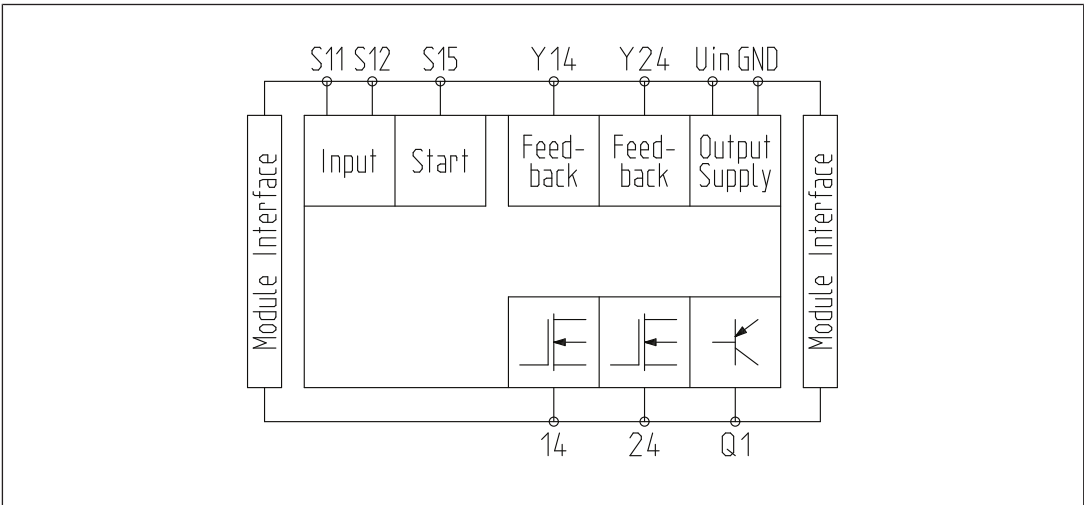

15.9.4 Dimensions

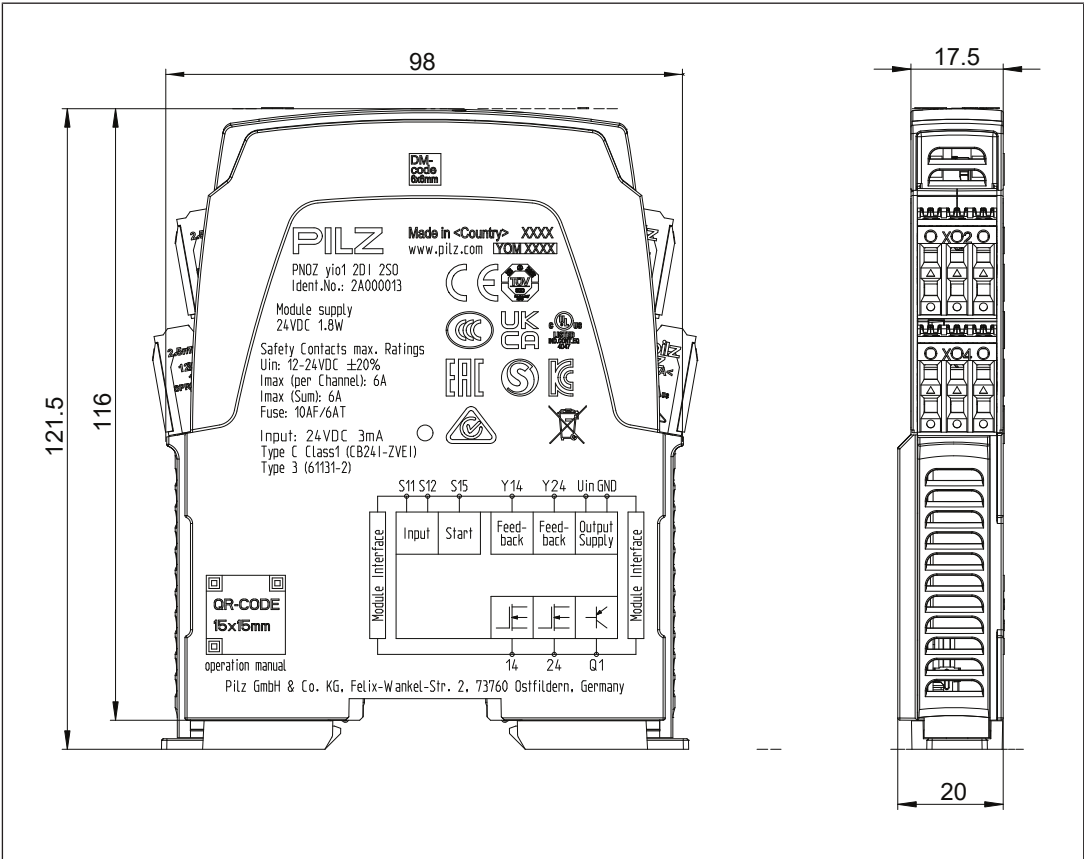

15.9.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Supply to the SC outputs
Voltage	12 - 24 V
Kind	DC
Voltage tolerance	-20 %/+20 %
Max. continuous current that the external power supply must provide	6 A
Potential isolation	No
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	105 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, capacitive, resistive
Inputs	
Number	2
Number of start inputs	1
Number of feedback loop inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Semiconductor outputs	
Number of safety outputs	
Instantaneous	2
Switching capability	
Voltage	12 - 24 V
Current	6 A
Residual current at "0" signal	0,5 mA
Max. transient pulsed current	100 A
Max. capacitive load	2,5 µF
Max. internal voltage drop	160 mV
Max. duration of off time during self test	500 µs
Potential isolation	No
Short circuit-proof	yes

Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Times	
Recovery time at max. switching frequency 1/s	
After E-STOP	30 ms
Waiting period with manual and monitored start	30 ms
Min. start pulse duration with a monitored start	
With rising edge	100 ms
with rising and falling edge	150 ms
Max. start pulse duration with a monitored start	
with rising and falling edge	2 s
Supply interruption before de-energisation	20 ms
Simultaneity, input circuit	∞
Environmental data	
Ambient temperature	
In accordance with the standard	EN 60068-2-14
Temperature range	-10 - 55 °C
Storage temperature	
In accordance with the standard	EN 60068-2-1/-2
Temperature range	-40 - 85 °C
Climatic suitability	
In accordance with the standard	EN 60068-2-78
Condensation during operation	Not permitted
Max. operating height above sea level	5000 m
EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
Vibration	
In accordance with the standard	EN 60068-2-6
Frequency	10 - 55 Hz
Amplitude	0,35 mm
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2

Environmental data

Protection type

In accordance with the standard **EN 60529**Housing **IP20**Terminals **IP20**Mounting area (e.g. control cabinet) **IP54****Mechanical data**

Mounting position

Any

DIN rail

Top hat rail **35 x 7,5 EN 50022**Recess width **27 mm**

Max. cable length

Max. cable length per input **1 km**

Material

Bottom **PC**Top **PC**

Connection type

Spring-loaded terminal, screw terminal

Mounting type

plug-in

Conductor cross section with screw terminals

1 core flexible **0,25 - 2,5 mm², 24 - 12 AWG**2 core with the same cross section, flexible with
crimp connectors, no plastic sleeve **0,25 - 1 mm², 24 - 16 AWG**2 core with the same cross section, flexible without
crimp connectors or with TWIN crimp connectors **0,25 - 1,5 mm², 24 - 16 AWG**

Torque setting with screw terminals

0,5 Nm

Stripping length with screw terminals

8 mm

Conductor cross section with spring-loaded terminals:

Flexible with/without crimp connector **0,2 - 2,5 mm², 24 - 12 AWG**

Spring-loaded terminals: Terminal points per connection

2

Stripping length with spring-loaded terminals

9 mm

Dimensions

Height **98 mm**Width **17,5 mm**Depth **121 mm**

Weight

90 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.9.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
------	----------------	----------------------------	----------------------------------	--------------------	------------------------------------	------------------	------------------	---

Input								
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Output								
SC output, single	2-channel	PL e	Cat. 4	SIL CL 3	6,44E-10	SIL 3	5,43E-05	20
SC output, redundant	2-channel	PL e	Cat. 4	SIL CL 3	9,68E-10	SIL 3	8,16E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.9.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF
Single-pole output	
Interfaces	
Source	
Interface	Module
Class	C2
Drain	
Interface	Actuator
Class	C1, C2
Source parameters	
Max. test pulse duration	500 µs
Max. rated current	6 A
Max. capacitive load	2,5 µF

15.9.8 Order reference

15.9.8.1 Product

Product type	Features	Order no.
PNOZ yio1 2DI 2SO	Expansion module with 1 input function, 2 output functions, instantaneous semiconductor output	2A000013

15.9.8.2 Accessories**Connection terminals**

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.10 PNOZ yio2 2DI 3NO

15.10.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ 1 output function with 3 safe relay outputs, positive-guided, instantaneous, and 1 input for feedback loop
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.10.2 Front view

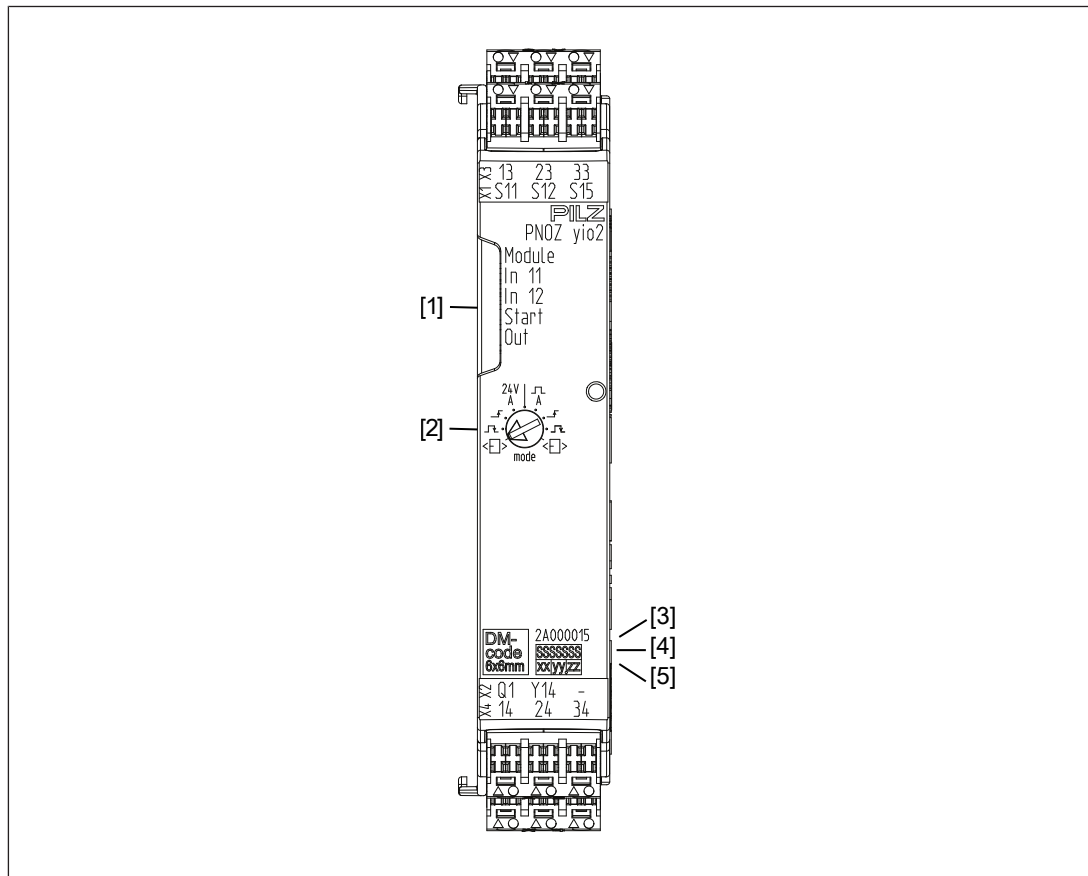


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Order number
- [4] Serial number
- [5] Device version

15.10.3 Block diagram

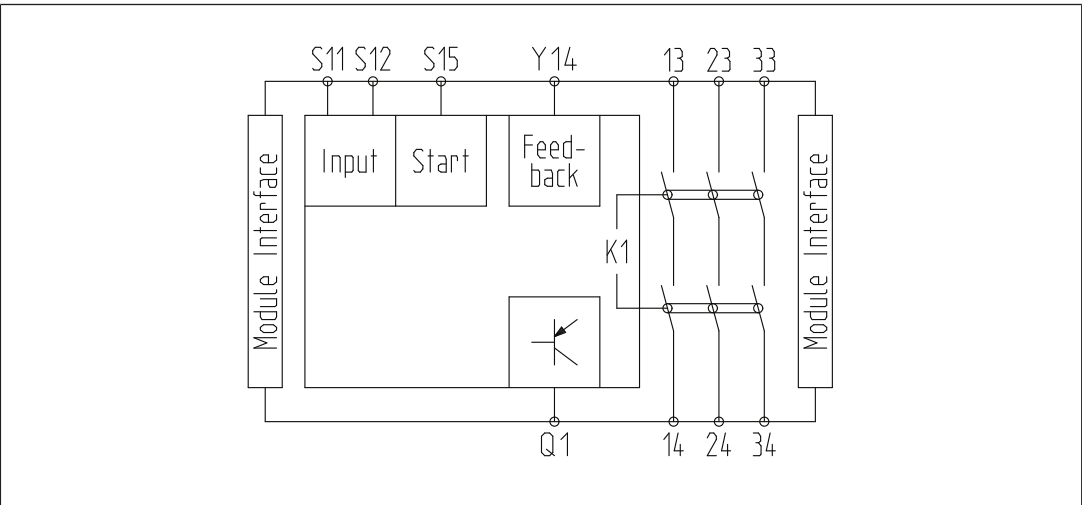

15.10.4 Dimensions

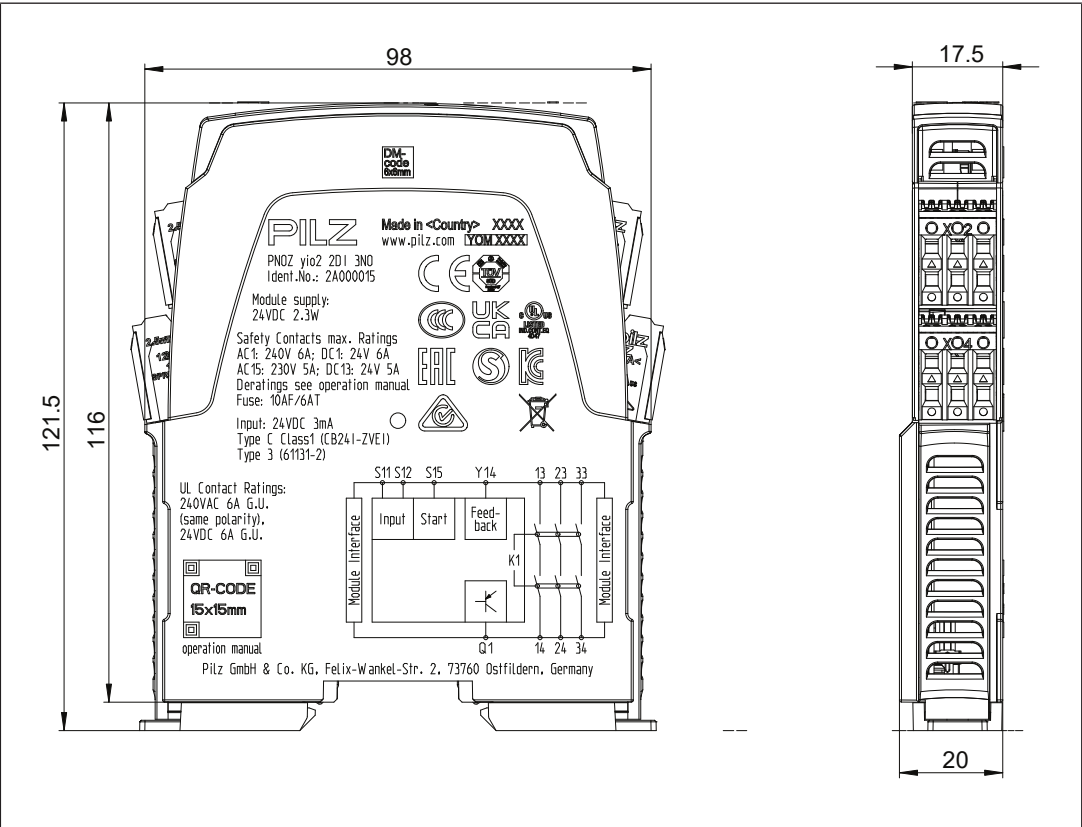

15.10.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	125 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, resistive
Inputs	
Number	2
Number of start inputs	1
Number of feedback loop inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Relay outputs	
Number of output contacts	
Safety contacts (N/O), instantaneous	3
Max. short circuit current I _K	1 kA
Utilisation category	
In accordance with the standard	EN 60947-4-1
Utilisation category of safety contacts	
AC1 at	240 V
Min. current	10 mA
Max. current	6 A
Max. power	1500 VA
DC1 at	24 V
Min. current	5 mA
Max. current	6 A
Max. power	150 W

Relay outputs

Utilisation category

In accordance with the standard

EN 60947-5-1

Utilisation category of safety contacts

AC15 at

230 V

Max. current

5 A

Max. power

1.150 W

DC13 (6 cycles/min) at

24 V

Max. current

5 A

Max. power

120 W

Utilisation category in accordance with UL

Voltage

240 V AC G.U. Resistive

With current

6 A

Voltage

24 V DC G. U. Resistive

With current

6 A

Pilot Duty; R300

24 V DC

With current

3 A

Pilot Duty; B300

230 V AC

With current

3 A

External contact fuse protection, safety contacts

In accordance with the standard

EN 60947-5-1

Max. melting integral

132 A²s

Blow-out fuse, quick

10 A

Blow-out fuse, slow

6 A

Blow-out fuse, gG

10 A

Contact material

AgCuNi + 0,2 µm Au

Potential isolation

yes**Conventional thermal current while loading several contacts**

Ith per contact at UB DC; AC1: 240 V, DC1: 24 V

Conv. therm. current with 1 contact

6 A

Conv. therm. current with 2 contacts

5,5 A

Conv. therm. current with 3 contacts

4,5 A**Times**

Recovery time at max. switching frequency 1/s

After E-STOP

30 ms

Waiting period with manual and monitored start

30 ms

Min. start pulse duration with a monitored start

With rising edge

100 ms

with rising and falling edge

150 ms

Max. start pulse duration with a monitored start

with rising and falling edge

2 s

Supply interruption before de-energisation

20 ms

Simultaneity, input circuit

∞

Environmental data

Ambient temperature

In accordance with the standard

EN 60068-2-14

Temperature range

-10 - 55 °C

Storage temperature

In accordance with the standard

EN 60068-2-1/-2

Temperature range

-40 - 85 °C

Climatic suitability

In accordance with the standard

EN 60068-2-78

Condensation during operation

Not permitted

EMC

EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Vibration

In accordance with the standard

EN 60068-2-6

Frequency

10 - 55 Hz

Amplitude

0,35 mm

Shock stress

In accordance with the standard

EN 60068-2-27

Acceleration

15g

Duration

11 ms

Airgap creepage

In accordance with the standard

EN 60947-5-1

Overvoltage category

III

Pollution degree

2

Protection type

In accordance with the standard

EN 60529

Housing

IP20

Terminals

IP20

Mounting area (e.g. control cabinet)

IP54**Potential isolation**

Potential isolation between

Output and system voltage

Type of potential isolation

Protective separation

Rated insulation voltage

250 V

Rated surge voltage

6000 V**Mechanical data**

Mounting position

Any

Mechanical life

10,000,000 cycles

DIN rail

Top hat rail

35 x 7,5 EN 50022

Recess width

27 mm

Max. cable length

Max. cable length per input

1 km

Material

Bottom

PC

Top

PC

Connection type

Spring-loaded terminal, screw terminal

Mechanical data	
Mounting type	plug-in
Conductor cross section with screw terminals	
1 core flexible	0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm², 24 - 16 AWG
Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals:	
Flexible with/without crimp connector	0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	115 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.10.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
------	----------------	----------------------------	----------------------------------	--------------------	------------------------------------	------------------	------------------	---

Input								
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Output								
Relay outputs	2-channel	PL e	Cat. 4	SIL CL 3	8,75E-10	SIL 3	7,21E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.10.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Max. test pulse duration	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF
Relay outputs	
Interfaces	
Source	
Interface	Module
Class	A
Drain	
Interface	Actuator
Class	A
Source parameters	
Min. switching voltage	12 V
Max. switching voltage	250 V
Min. switching current	5 mA
Max. switching current	6 A
Potential isolation	yes

15.10.8 Supplementary data

15.10.8.1 Permitted operating height

The values stated in the technical details apply to the use of the device in operating heights up to max. 2000 m above sea level. When used in greater heights, constraints have to be taken into account:

- Permitted maximum operating height 5000 m

Reduction of the voltage at the relay outputs at $U_B = 30\text{ V}$ depending on the operating height

Prerequisite:

- Overvoltage category: III
- Pollution degree: 2

Maximum operating height	Max. voltage at the relay output
2000 m	300 V
3000 m	150 V
4000 m	150 V
5000 m	150 V

- From an operating height of 2000 m the max. permitted ambient temperature is reduced by $0.5\text{ °C}/100\text{ m}$

Operating height	Permitted ambient temperature
3000 m	50 °C
4000 m	45 °C
5000 m	40 °C


15.10.8.2**Service life graph****CAUTION!**

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switch frequency and the load of the relay output.

If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switch frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

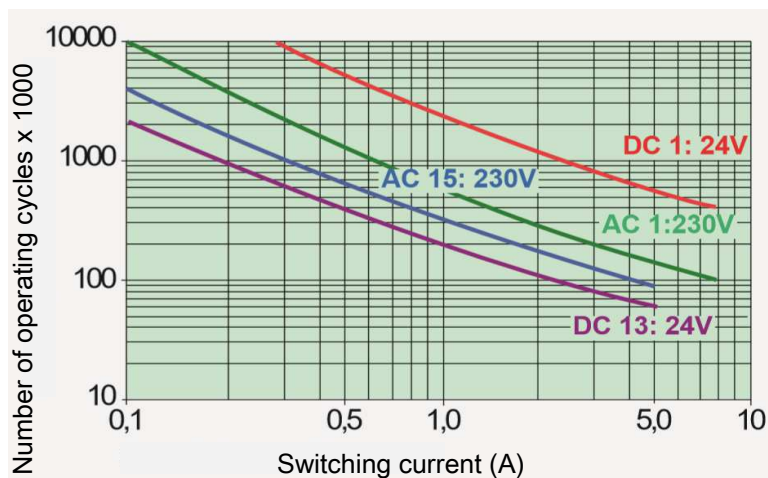

Example

- ▶ Inductive load: 0.3 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1 000 000 cycles

Provided the application to be implemented requires fewer than 1 000 000 cycles, the PFH value (see [Technical details \[133\]](#)) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With DC contactors, use flywheel diodes for spark suppression.

15.10.9 Order reference

15.10.9.1 Product

Product type	Features	Order no.
PNOZ yio2 2DI 3NO	Expansion module with 1 input function, 1 output function, instantaneous relay outputs	2A000015

15.10.9.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.11 PNOZ yio3 2DI 1SO 1SO t

15.11.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ 1 output function with 1 safe semiconductor output, instantaneous, and 1 input for feedback loop
- ▶ 1 output function with 1 safe semiconductor output, delayed, and 1 input for feedback loop
- ▶ Delay time can be set via rotary switches
- ▶ Off or on delay can be selected
- ▶ Supply voltage connection for the semiconductor outputs
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.11.2 Front view

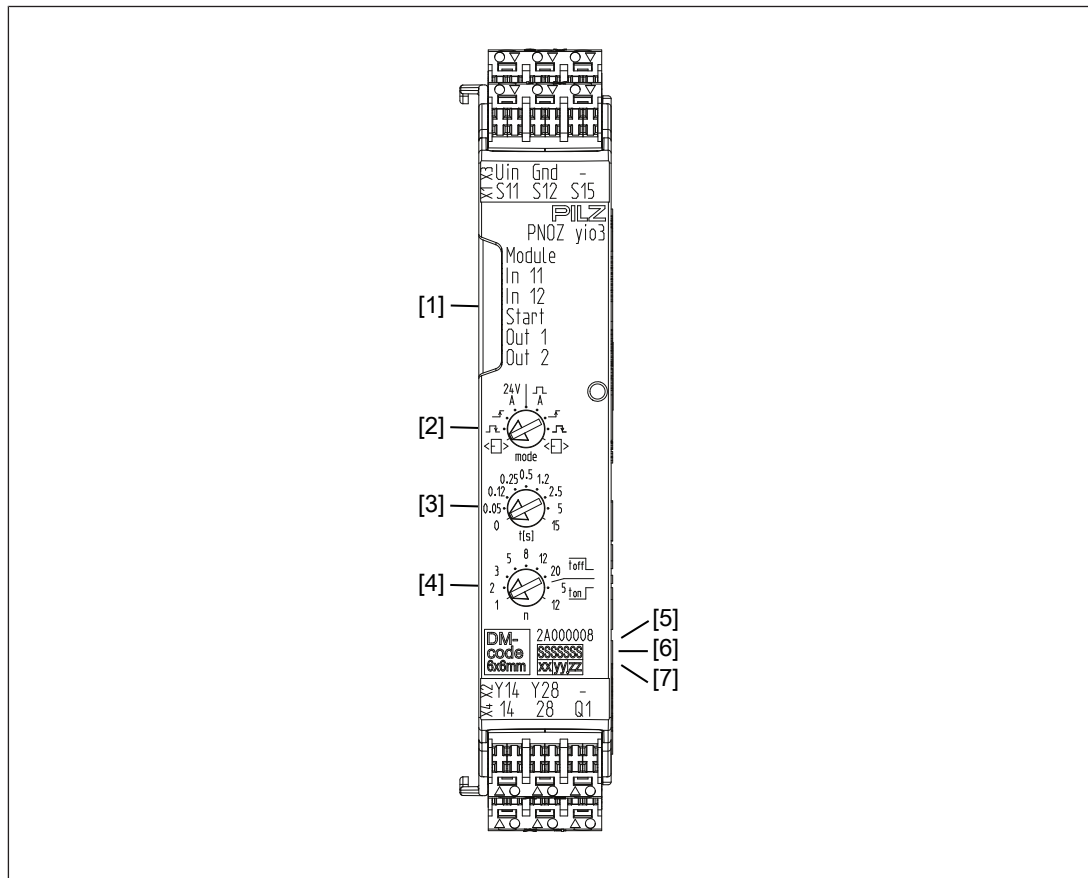


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Rotary switch for time value for delay
- [4] Rotary switch for factor for delay and delay type (on or off)
- [5] Order number
- [6] Serial number
- [7] Device version

15.11.3 Block diagram

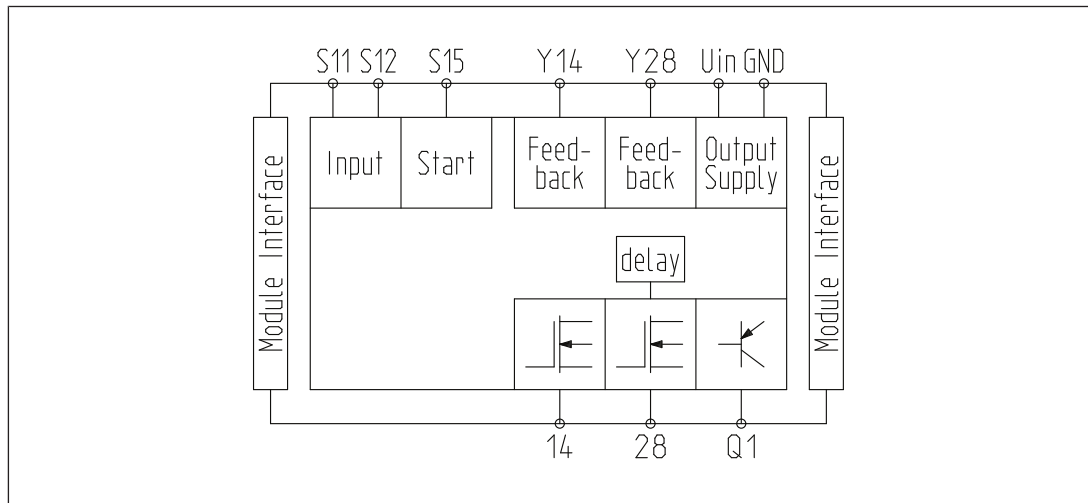

15.11.4 Dimensions

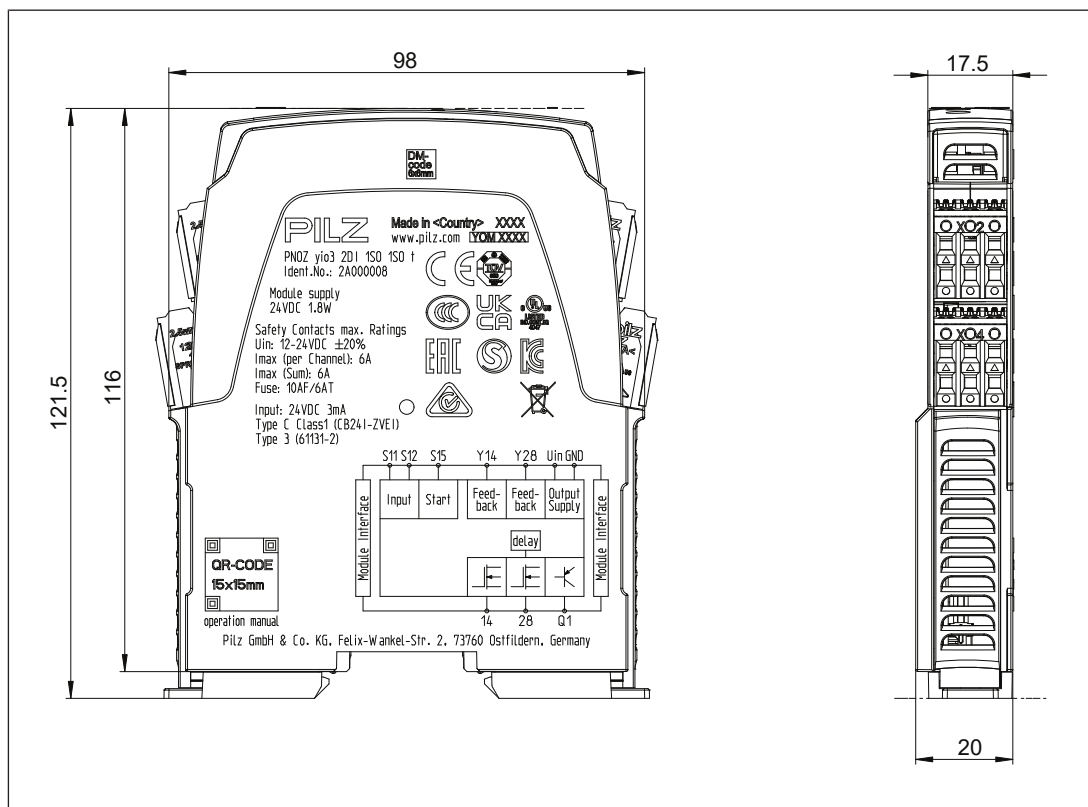

15.11.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Supply to the SC outputs
Voltage	12 - 24 V
Kind	DC
Voltage tolerance	-20 %/+20 %
Max. continuous current that the external power supply must provide	6 A
Potential isolation	No
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	105 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, capacitive, resistive
Inputs	
Number	2
Number of start inputs	1
Number of feedback loop inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Semiconductor outputs	
Number of safety outputs	
Delayed	1
Instantaneous	1
Switching capability	
Voltage	12 - 24 V
Current	6 A
Residual current at "0" signal	0,5 mA
Max. transient pulsed current	100 A
Max. capacitive load	2,5 µF
Max. internal voltage drop	160 mV
Max. duration of off time during self test	500 µs
Potential isolation	No
Short circuit-proof	yes

Signal output

Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes

Times

Recovery time at max. switching frequency 1/s

After E-STOP 30 ms

Selectable delay time when switching on	0,25 s, 0,6 s, 1,25 s, 1,44 s, 12,5 s, 14,4 s, 180 s, 2,5 s, 25 s, 3 s, 30 s, 6 s, 60 s, 75 s
---	---

Selectable delay time when switching off	0,05 s, 0,1 s, 0,12 s, 0,15 s, 0,24 s, 0,25 s, 0,36 s, 0,4 s, 0,5 s, 0,6 s, 0,75 s, 0,96 s, 1 s, 1,2 s, 1,25 s, 1,44 s, 1,5 s, 10 s, 100 s, 12,5 s, 120 s, 14,4 s, 15 s, 180 s, 2 s, 2,4 s, 2,5 s, 20 s, 24 s, 25 s, 3 s, 3,6 s, 30 s, 300 s, 4 s, 40 s, 45 s, 5 s, 6 s, 60 s, 7,5 s, 75 s, 9,6 s
--	---

Time accuracy	+/-1,5 %
---------------	----------

Waiting period with manual and monitored start	30 ms
--	-------

Min. start pulse duration with a monitored start

With rising edge 100 ms

with rising and falling edge 150 ms

Max. start pulse duration with a monitored start

with rising and falling edge 2 s

Supply interruption before de-energisation	20 ms
--	-------

Simultaneity, input circuit	∞
-----------------------------	---

Environmental data

Ambient temperature

In accordance with the standard EN 60068-2-14

Temperature range -10 - 55 °C

Storage temperature

In accordance with the standard EN 60068-2-1/-2

Temperature range -40 - 85 °C

Climatic suitability

In accordance with the standard EN 60068-2-78

Condensation during operation	Not permitted
-------------------------------	---------------

Max. operating height above sea level	5000 m
---------------------------------------	--------

EMC	EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1
-----	--

Vibration

In accordance with the standard EN 60068-2-6

Frequency 10 - 55 Hz

Amplitude 0,35 mm

Environmental data	
Shock stress	
In accordance with the standard	EN 60068-2-27
Acceleration	15g
Duration	11 ms
Airgap creepage	
In accordance with the standard	EN 60947-5-1
Overvoltage category	III
Pollution degree	2
Protection type	
In accordance with the standard	EN 60529
Housing	IP20
Terminals	IP20
Mounting area (e.g. control cabinet)	IP54
Mechanical data	
Mounting position	Any
DIN rail	
Top hat rail	35 x 7,5 EN 50022
Recess width	27 mm
Max. cable length	
Max. cable length per input	1 km
Material	
Bottom	PC
Top	PC
Connection type	Spring-loaded terminal, screw terminal
Mounting type	plug-in
Conductor cross section with screw terminals	
1 core flexible	0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	0,25 - 1,5 mm², 24 - 16 AWG
Torque setting with screw terminals	0,5 Nm
Stripping length with screw terminals	8 mm
Conductor cross section with spring-loaded terminals:	
Flexible with/without crimp connector	0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection	2
Stripping length with spring-loaded terminals	9 mm
Dimensions	
Height	98 mm
Width	17,5 mm
Depth	121 mm
Weight	87 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.11.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
------	----------------	----------------------------	----------------------------------	--------------------	------------------------------------	------------------	------------------	---

Input								
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Output								
SC output, single	2-channel	PL e	Cat. 4	SIL CL 3	6,44E-10	SIL 3	5,43E-05	20
SC output, redundant	2-channel	PL e	Cat. 4	SIL CL 3	9,68E-10	SIL 3	8,16E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.11.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Test pulse duration, safety outputs	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF
Single-pole output	
Interfaces	
Source	
Interface	Module
Class	C2
Drain	
Interface	Actuator
Class	C1, C2
Source parameters	
Max. test pulse duration	500 µs
Max. rated current	6 A
Max. capacitive load	2,5 µF

15.11.8 Order reference

15.11.8.1 Product

Product type	Features	Order no.
PNOZ yio3 2DI 1SO 1SO t	Expansion module with 1 input function, 2 output functions, instantaneous/delayed semiconductor output	2A000008

15.11.8.2 Accessories**Connection terminals**

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

15.12 PNOZ yio4 2DI 3NO t

15.12.1 Device features


- ▶ Expansion module for safe applications of the myPNOZ
- ▶ 1 input function to connect E-STOP pushbutton, safety gate switch or light curtain and start button
- ▶ Start type can be set via rotary switch
- ▶ 1 output function with 3 safe relay outputs, positive-guided, delayed, and 1 input for feed-back loop
- ▶ Delay time can be set via rotary switches
- ▶ Off or on delay can be selected
- ▶ 1 signal output, e.g. for display
- ▶ LED display for:
 - Module status
 - State of the inputs
 - State of the start input
 - Switch state of the outputs



NOTICE

Required firmware version of the head module: ≥ 1.0


15.12.2 Front view

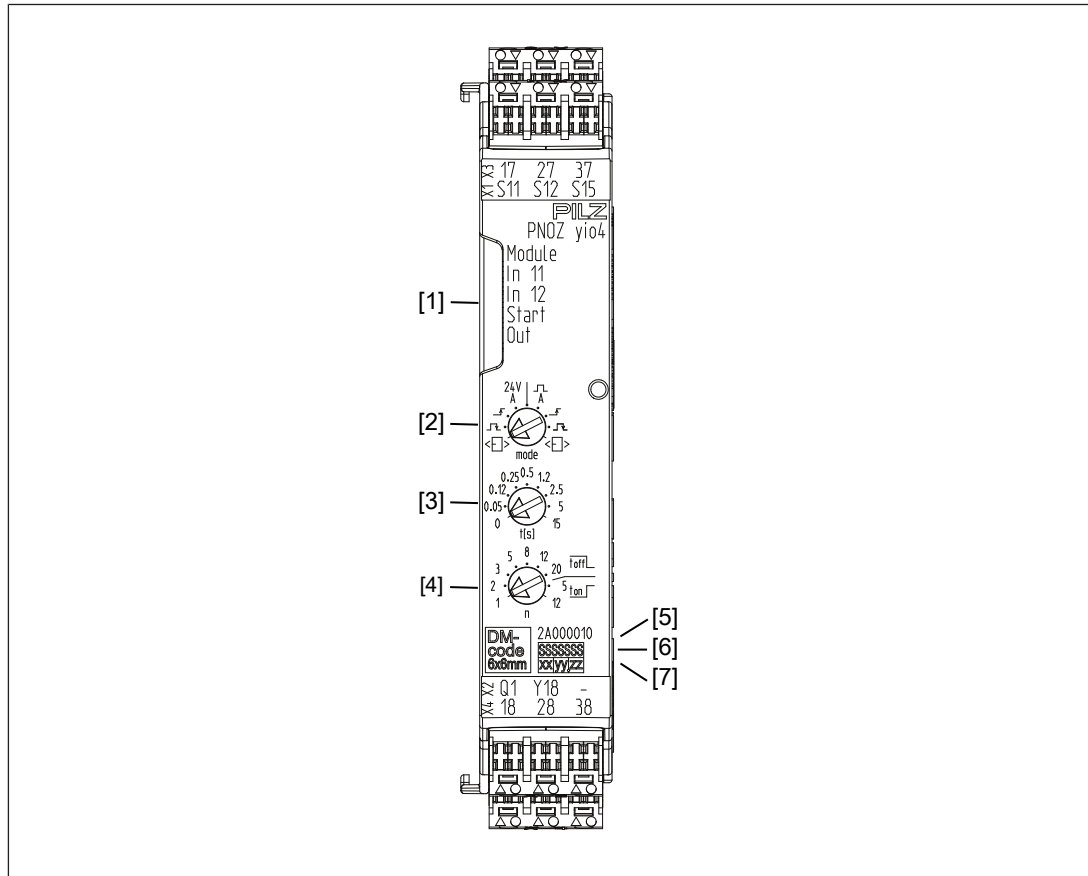


Legend

- [1] LEDs for diagnostics
- [2] Rotary switch for start types and test pulse evaluation (S11, S12)
- [3] Rotary switch for time value for delay
- [4] Rotary switch for factor for delay and delay type (on or off)
- [5] Order number
- [6] Serial number
- [7] Device version

15.12.3 Block diagram

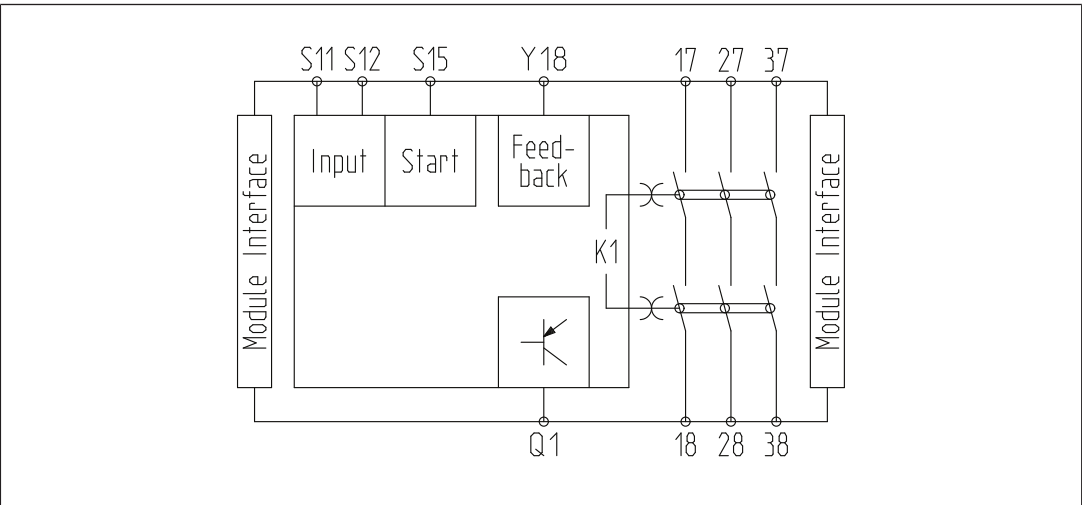

15.12.4 Dimensions

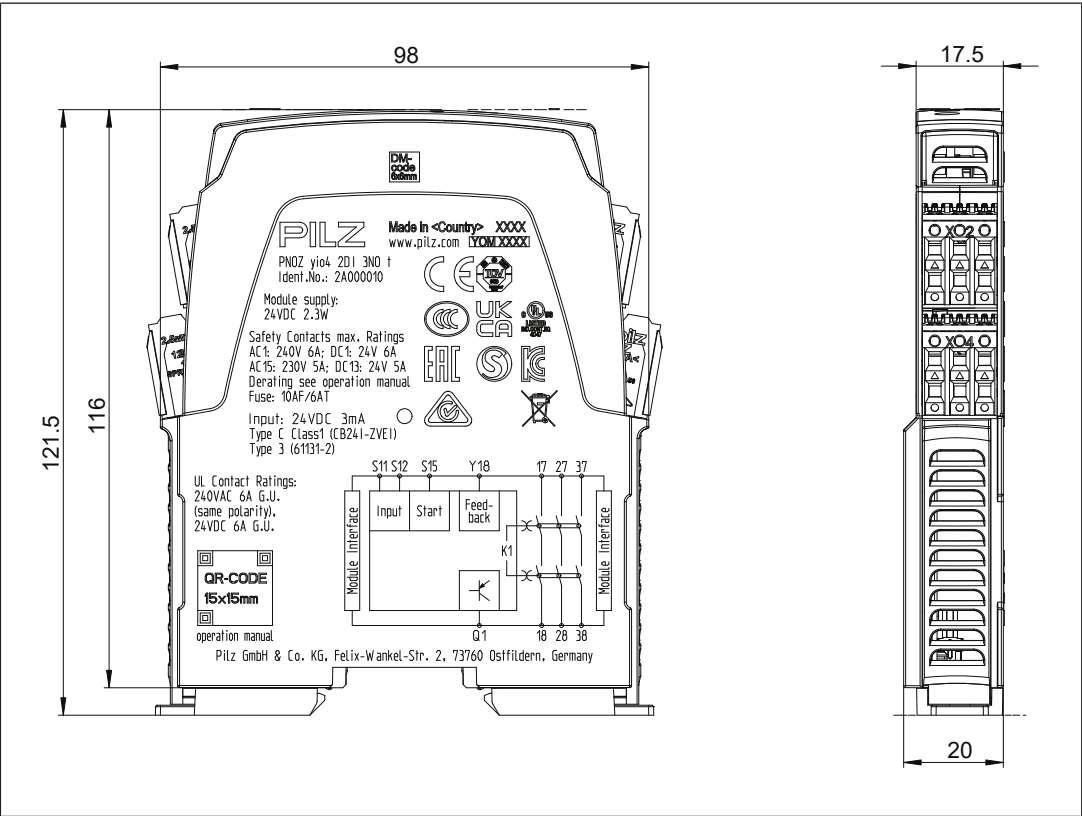

15.12.5 Technical details

General	
Certifications	CE, EAC (Eurasian), TÜV, cULus Listed
Electrical data	
Supply voltage	
for	Module supply
internal	via head module
Voltage	24 V
Kind	DC
Current consumption	125 mA
Duty cycle	100 %
Status indicator	LED
Permitted loads	inductive, resistive
Inputs	
Number	2
Number of start inputs	1
Number of feedback loop inputs	1
Input voltage in accordance with EN 61131-2 Type 1	24 V DC
Input current at rated voltage	2,8 mA
Input current range	2 - 3 mA
Pulse suppression	1 ms
Maximum input delay	1,5 ms
Potential isolation	No
Signal output	
Quantity	1
Voltage	24 V
Current	50 mA
Residual current at "0"	10 µA
Max. transient pulsed current	70 mA
Short circuit-proof	yes
Relay outputs	
Number of output contacts	
Safety contacts (N/O), delayed	3
Max. short circuit current I _K	1 kA
Utilisation category	
In accordance with the standard	EN 60947-4-1
Utilisation category of safety contacts	
AC1 at	240 V
Min. current	10 mA
Max. current	6 A
Max. power	1500 VA
DC1 at	24 V
Min. current	5 mA
Max. current	6 A
Max. power	150 W

Relay outputs

Utilisation category

In accordance with the standard

EN 60947-5-1

Utilisation category of safety contacts

AC15 at	230 V
Max. current	5 A
Max. power	1.150 W
DC13 (6 cycles/min) at	24 V
Max. current	5 A
Max. power	120 W

Utilisation category in accordance with UL

Voltage	240 V AC G.U. Resistive
With current	6 A
Voltage	24 V DC G. U. Resistive
With current	6 A
Pilot Duty; R300	24 V DC
With current	3 A
Pilot Duty; B300	230 V AC
With current	3 A

External contact fuse protection, safety contacts

In accordance with the standard	EN 60947-5-1
Max. melting integral	132 A²s
Blow-out fuse, quick	10 A
Blow-out fuse, slow	6 A
Blow-out fuse, gG	10 A

Contact material

AgCuNi + 0,2 µm Au

Potential isolation

yes**Conventional thermal current while loading several contacts**

Ith per contact at UB DC; AC1: 240 V, DC1: 24 V

Conv. therm. current with 1 contact	6 A
Conv. therm. current with 2 contacts	5,5 A
Conv. therm. current with 3 contacts	4,5 A

Times

Recovery time at max. switching frequency 1/s

After E-STOP	30 ms
--------------	--------------

Selectable delay time when switching on

0,25 s, 0,6 s, 1,25 s, 1,44 s, 12,5 s, 14,4 s, 180 s, 2,5 s, 25 s, 3 s, 30 s, 6 s, 60 s, 75 s

Selectable delay time when switching off

0,05 s, 0,1 s, 0,12 s, 0,15 s, 0,24 s, 0,25 s, 0,36 s, 0,4 s, 0,5 s, 0,6 s, 0,75 s, 0,96 s, 1 s, 1,2 s, 1,25 s, 1,44 s, 1,5 s, 10 s, 100 s, 12,5 s, 120 s, 14,4 s, 15 s, 180 s, 2 s, 2,4 s, 2,5 s, 20 s, 24 s, 25 s, 3 s, 3,6 s, 30 s, 300 s, 4 s, 40 s, 45 s, 5 s, 6 s, 60 s, 7,5 s, 75 s, 9,6 s

Time accuracy

+/-1,5 %

Waiting period with manual and monitored start

30 ms

Times

Min. start pulse duration with a monitored start

With rising edge **100 ms**with rising and falling edge **150 ms**

Max. start pulse duration with a monitored start

with rising and falling edge **2 s**

Supply interruption before de-energisation

20 ms

Simultaneity, input circuit

∞**Environmental data**

Ambient temperature

In accordance with the standard **EN 60068-2-14**Temperature range **-10 - 55 °C**

Storage temperature

In accordance with the standard **EN 60068-2-1/-2**Temperature range **-40 - 85 °C**

Climatic suitability

In accordance with the standard **EN 60068-2-78**

Condensation during operation

Not permitted

EMC

EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1

Vibration

In accordance with the standard **EN 60068-2-6**Frequency **10 - 55 Hz**Amplitude **0,35 mm**

Shock stress

In accordance with the standard **EN 60068-2-27**Acceleration **15g**Duration **11 ms**

Airgap creepage

In accordance with the standard **EN 60947-5-1**Overvoltage category **III**Pollution degree **2**

Protection type

In accordance with the standard **EN 60529**Housing **IP20**Terminals **IP20**Mounting area (e.g. control cabinet) **IP54****Potential isolation**

Potential isolation between

Output and system voltage

Type of potential isolation

Protective separation

Rated insulation voltage

250 V

Rated surge voltage

6000 V**Mechanical data**

Mounting position

Any

Mechanical life

10,000,000 cycles

Mechanical data		
DIN rail		
Top hat rail		35 x 7,5 EN 50022
Recess width		27 mm
Max. cable length		
Max. cable length per input		1 km
Material		
Bottom		PC
Top		PC
Connection type		Spring-loaded terminal, screw terminal
Mounting type		plug-in
Conductor cross section with screw terminals		
1 core flexible		0,25 - 2,5 mm², 24 - 12 AWG
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve		0,25 - 1 mm², 24 - 16 AWG
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors		0,25 - 1,5 mm², 24 - 16 AWG
Torque setting with screw terminals		0,5 Nm
Stripping length with screw terminals		8 mm
Conductor cross section with spring-loaded terminals:		
Flexible with/without crimp connector		0,2 - 2,5 mm², 24 - 12 AWG
Spring-loaded terminals: Terminal points per connection		
		2
Stripping length with spring-loaded terminals		9 mm
Dimensions		
Height		98 mm
Width		17,5 mm
Depth		121 mm
Weight		115 g

Where standards are undated, the 2021-01 latest editions shall apply.

15.12.6 Safety characteristic data



NOTICE

You must comply with the safety characteristic data in order to achieve the required safety level for your plant/machine.

Unit	Operating mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH _D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T _M [year]
------	----------------	----------------------------	----------------------------------	--------------------	------------------------------------	------------------	------------------	---

Input								
Inputs	2-channel	PL e	Cat. 4	SIL CL 3	1,93E-10	SIL 3	1,67E-05	20
Output								
Relay outputs	2-channel	PL e	Cat. 4	SIL CL 3	8,75E-10	SIL 3	7,21E-05	20

Explanatory notes for the safety-related characteristic data:

- ▶ The SIL CL value in accordance with EN 62061 corresponds to the SIL value in accordance with EN 61508.
- ▶ T_M is the maximum mission time in accordance with EN ISO 13849-1. The value also applies as the retest interval in accordance with EN 61508-6 and IEC 61511 and as the proof test interval and mission time in accordance with EN 62061.
- ▶ These characteristic data also apply in applications with feedback loop

Additional information for applications in accordance with IEC 61511:

- ▶ Hardware fault tolerance: 1
- ▶ Subsystem of type B
- ▶ Safety function: safe shutdown

All the units used within a safety function must be considered when calculating the safety characteristic data.



INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

15.12.7 Classification according to ZVEI, CB24I

The following tables describe the classes and specific values of the product interface and the classes of interfaces compatible with it. The classification is described in the ZVEI position paper "Classification of Binary 24 V Interfaces - Functional Safety aspects covered by dynamic testing".

Input	
Interfaces	
Drain	
Interface	Sensor
Class	C1
Source	
Interface	Module
Class	C1, C2, C3
Drain parameters	
Max. test pulse duration	1 ms
Min. input resistance	10 kOhm
Max. capacitive load	126 nF
Relay outputs	
Interfaces	
Source	
Interface	Module
Class	A
Drain	
Interface	Actuator
Class	A
Source parameters	
Min. switching voltage	12 V
Max. switching voltage	250 V
Min. switching current	5 mA
Max. switching current	6 A
Potential isolation	yes

15.12.8 Supplementary data

15.12.8.1 Permitted operating height

The values stated in the technical details apply to the use of the device in operating heights up to max. 2000 m above sea level. When used in greater heights, constraints have to be taken into account:

- ▶ Permitted maximum operating height 5000 m

Reduction of the voltage at the relay outputs at $U_B = 30\text{ V}$ depending on the operating height

Prerequisite:

- Overvoltage category: III
- Pollution degree: 2

Maximum operating height	Max. voltage at the relay output
2000 m	300 V
3000 m	150 V
4000 m	150 V
5000 m	150 V

- From an operating height of 2000 m the max. permitted ambient temperature is reduced by $0.5\text{ °C}/100\text{ m}$

Operating height	Permitted ambient temperature
3000 m	50 °C
4000 m	45 °C
5000 m	40 °C

15.12.8.2

Service life graph




CAUTION!

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switch frequency and the load of the relay output.

If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switch frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

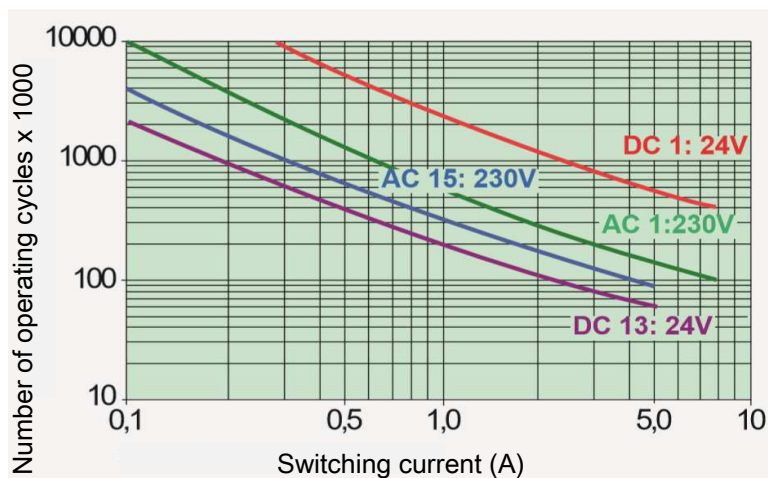

Example

- ▶ Inductive load: 0.3 A
- ▶ Utilisation category: AC15
- ▶ Contact service life: 1 000 000 cycles

Provided the application to be implemented requires fewer than 1 000 000 cycles, the PFH value (see [Technical details \[153\]](#)) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With DC contactors, use flywheel diodes for spark suppression.

15.12.9 Order reference

15.12.9.1 Product

Product type	Features	Order no.
PNOZ yio4 2DI 3NO t	Expansion module with 1 input function, 1 output function, delayed relay outputs	2A000010

15.12.9.2 Accessories

Connection terminals

Product type	Features	Order no.
PNOZ s Setscrew terminals	1 set of screw terminals, 17.5 mm	750003
PNOZ s Setspring loaded terminals	1 set of spring-loaded terminals, 17.5 mm	751003

16 **EC declaration of conformity**

This product/these products meet the requirements of the directive 2006/42/EC for machinery of the European Parliament and of the Council. The complete EC Declaration of Conformity is available on the Internet at www.pilz.com/downloads.

Authorised representative: Norbert Fröhlich, Pilz GmbH & Co. KG, Felix-Wankel-Str. 2, 73760 Ostfildern, Germany

► Support

Technical support is available from Pilz round the clock.

Americas

Brazil

+55 11 97569-2804

Canada

+1 888 315 7459

Mexico

+52 55 5572 1300

USA (toll-free)

+1 877-PILZUSA (745-9872)

Asia

China

+86 21 60880878-216

Japan

+81 45 471-2281

South Korea

+82 31 778 3300

Australia and Oceania

Australia

+61 3 95600621

New Zealand

+64 9 6345350

Europe

Austria

+43 1 7986263-0

Belgium, Luxembourg

+32 9 3217570

France

+33 3 88104003

Germany

+49 711 3409-444

Ireland

+353 21 4804983

Italy, Malta

+39 0362 1826711

Pilz develops environmentally-friendly products using ecological materials and energy-saving technologies. Offices and production facilities are ecologically designed, environmentally-aware and energy-saving. So Pilz offers sustainability, plus the security of using energy-efficient products and environmentally-friendly solutions.



We are represented internationally. Please refer to our homepage www.pilz.com for further details or contact our headquarters.

Headquarters: Pilz GmbH & Co. KG, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: info@pilz.com, Internet: www.pilz.com

CEC® CHRE® CMSE® IndraNET p® Leansafe® Master of Safety® PAS4000® PASconfig® PAScal® PASconfig® Piz® PTT® PLID® PMCPromo® PMCprotego® PMCtendo® PMD® PM® PNOZ® PRBT® PRGM® Primo® PRTM® PSEN® PSS® PSIS® PSN® PSENET p®, SafetyEYE®, SafetyNET p®, THE SPIRIT OF SAFETY® are registered and protected trademarks of Piz GmbH & Co. KG in some countries. We would point out that product features may vary from the details stated in this document, depending on the status at the time of publication and the scope of the equipment. We accept no responsibility for the validity, accuracy and entirety of the text and graphics presented in this information. Please contact our Technical Support if you have any questions.

1005377-EN-02, 2021-03 Printed in Germany
© Pilz GmbH & Co. KG, 2019

PILZ
THE SPIRIT OF SAFETY